

California TIMES (CA-TIMES) Model

4E (Energy-Engineering-Environmental-Economic)

Modeling of Future California Energy and Climate Policies

Primary Authors

Christopher Yang, Sonia Yeh, Kalai Ramea, Saleh Zakerinia, and David McCollum⁺

Institute of Transportation Studies, University of California, Davis

⁺ *International Institute for Applied Systems Analysis, Laxenburg, Austria*

Supporting Team Members

David Bunch* and Joan Ogden

* *Graduate School of Management, University of California, Davis*
Institute of Transportation Studies, University of California, Davis

Contact Information

Sonia Yeh (slyeh@ucdavis.edu)
Chris Yang (ccyang@ucdavis.edu)
Institute of Transportation Studies
University of California
1605 Tilia Street, Suite 100
Davis, CA 95060

A Final Report Submitted to the California Air Resources Board

December 2013

SUMMARY FOR POLICYMAKERS

Introduction

California has taken important first steps towards addressing the state's greenhouse gas (GHG) emissions through a variety of important and innovative policies (including AB32, cap and trade, the low carbon fuel standard, GHG regulations for cars and trucks). These policies represent a framework through which further reductions past the 2020 timeframe will likely be implemented. However, understanding the long-term transformation of future energy system and how policies need to be formulated to address them is a huge challenge given the uncertainty that exists about options, resources and technologies that will be available and adopted to meet the GHG emissions reduction targets by 2050 and beyond.

Energy models such as CA-TIMES are useful to understand how the future energy system could evolve giving assumptions about demand growth, technology and technological change (e.g. availability, cost, and performance) and policies. Our purpose is to use models such as CA-TIMES to help us gain a better understanding of how resources and technologies can meet future demands; and how various policies can have impacts on the overall energy system.

Project Goals and Modeling Approach

The CA-TIMES model is a bottom-up, technology-rich energy system optimization model for California. CA-TIMES identifies the most cost-effective technology pathways and resources options that will enable the state to transition to deep reductions in GHG emissions. The key advantage of the CA-TIMES model is that it is a vertically integrated model of the entire extended energy system within California. Its key strength (as well as the weakness) is that the decisions are driven by economics, and assume decisionmakers make rational decisions based on economic tradeoffs; but it lacks consideration for non-economic behaviors such as consumers'/producers' attitudes toward technology risks, uncertainties of future costs (including technology costs and fuel costs) and policies, and social aspects of decision making (e.g. non-competitive markets) that cannot be captured based on costs alone.

CA-TIMES is an optimization model that projects the future structure and operation of the California energy system from a set of available resources, and supply and demand technologies. The model determines the lowest-cost energy system that can meet the demand for energy and energy services *and* any policy constraints. Specifically, CA-TIMES was designed to investigate the question of how California could meet an 80% reduction target for GHG emissions by 2050. This report describes scenarios that have been developed to understand how the emissions could be reduced under different sets of policy and technology constraints. This scenario approach allows the reader to understand how internal and external factors can influence important developments such as energy resource mix, electricity and fuels supply mix, and end use technology choices (in transportation, commercial and residential sectors).

Modeling Results for Primary GHG Reduction scenario

GHG Emissions

It is important to note that this version of CA-TIMES (v1.5) does not include offsets, and includes out-of-state aviation and marine emissions (which add an additional 10%, or 51.4 MMT CO₂e emissions in 2010 inventory). Given this all-inclusive emission accounting, our primary GHG scenario (GHG-Step) and the majority of the scenarios in the sensitivity analysis suggest that California can achieve approximately 62% reduction in GHG emissions from 1990 levels. Our main scenario is the "GHG-Step" which a cap is held at the 2020 target (1990 levels) between 2020 and 2050 but then dropped to 80% below 1990 emissions in 2050. Optimized emission reductions are seen across all end-use sectors (transportation, industrial, commercial, residential and agriculture) (see Figure PS.1) and require a major transformation

of the energy system, from electricity and fuels supply to all of the appliances and vehicles in the end use sectors.

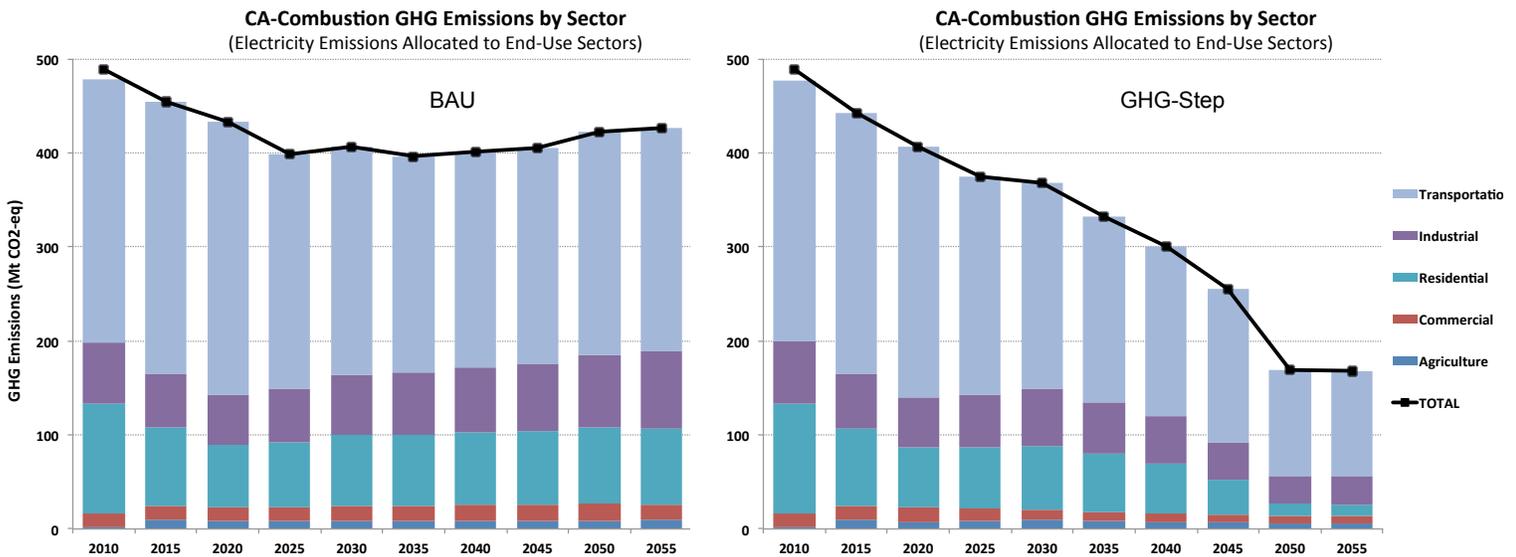


Figure PS.1 Instate GHG emissions from 2010 to 2055 by sector for the Reference scenario (left) and the main scenario (right). Instate emissions include shipping and aviation emissions not included in the State’s GHG emission inventory.

This report also details the modeling results for numerous scenario variations to understand how the evolution of the energy sector could change with respect to technology adoption, fuel and energy resource utilization and emissions under different sets of input assumptions. These variations are based primarily upon different assumptions about technology or resource cost and availability. Many scenario variations can reduce emission further than the primary GHG scenarios and have very different costs as well.

Transportation Sector

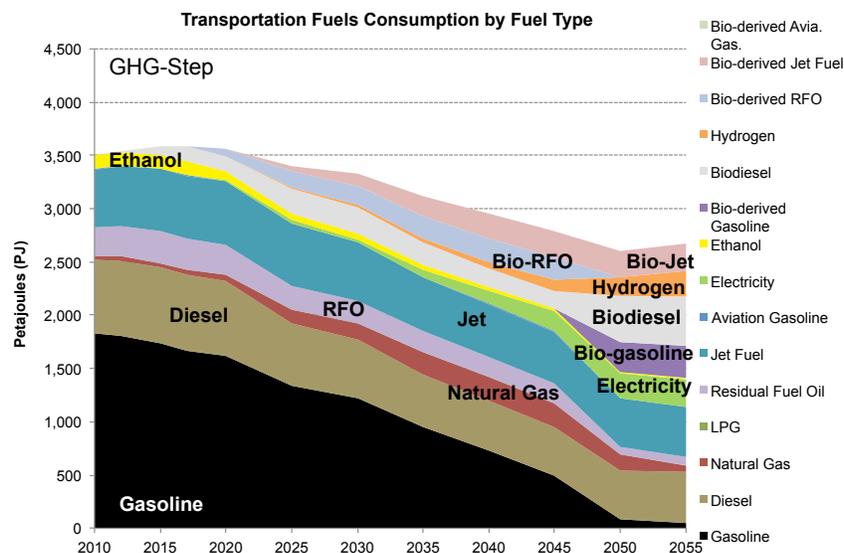


Figure PS.2 Transportation fuel consumption for the GHG-Step scenario from 2010 to 2050.

In the optimized energy system, the transportation sector (including all on-road and off-road, marine and aviation) relies increasingly on biofuels, electricity, hydrogen, and natural gas, and decreases reliance on petroleum (see Figure PS.2). Total fuel demand drops 26%: petroleum use drops from 95% to 40% of total fuel demand, while natural gas makes up 6%, biofuels 38%, hydrogen 7% and electricity 9% in 2050. This decline in fuels use requires major changes in fuel efficiency of transportation vehicles.

In the light-duty sector, on-road fuel economy increases from approximately 27 mpgge in 2010 to over 110 mpgge by 2050. This substantial increase in fuel economy is driven in part by shifts from combustion vehicles to electric-drive battery powered and fuel cell powered vehicles, which make up 50% and 38% of light duty vehicles in 2050.

In our sensitivity analysis, most GHG scenarios are very similar to the GHG-Step scenario. The scenario with the greatest difference is GHG-S-CCS, where the use of negative emission biofuels allows the GHG target to be met with fewer electric vehicles.

Electricity Supply

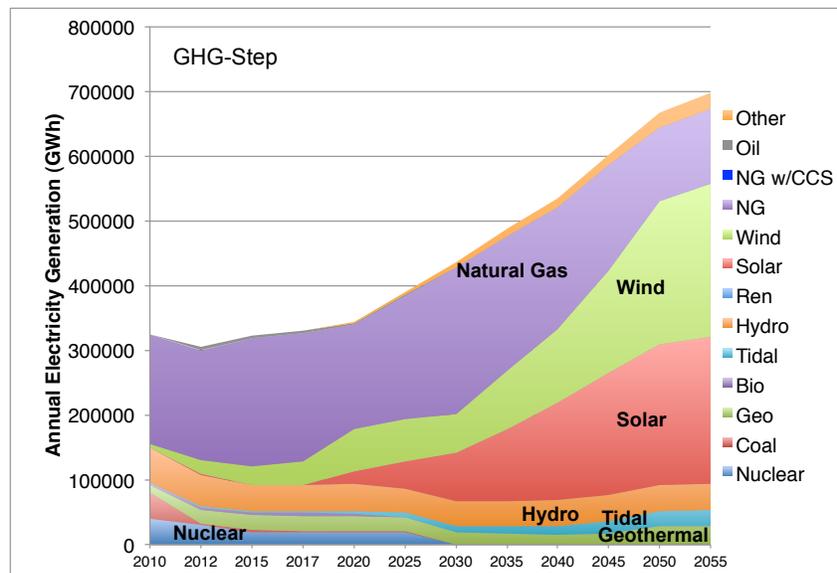


Figure PS.3 Electricity generation mix in GHG-Step scenario from 2010 to 2050.

The electricity mix in California requires substantial decarbonization in the carbon-constrained scenario (see Figure PS.3). Because nuclear power and carbon capture technologies are not available, the bulk of electricity generation is met by growing supplies of wind and solar power (in 2050, wind capacity is 74 GW while solar capacity is 104 GW). Overall the carbon intensity of electricity declines from 360 g/kWh to 57 g/kWh. This decarbonization of the electric sector is even more remarkable given the major increase in demand. The 2050 electricity demand has a 55% increase in demand vs. the BAU scenario in 2050, due to the significant shift towards electricity usage and away from natural gas and other fuels in buildings and industry sectors.

In our sensitivity analysis, most of the GHG scenarios look remarkably similar, with most electricity coming from wind and solar, with contributions from natural gas, hydropower, tidal, and geothermal. The scenarios that deviate from this pattern are if new electric generation resources are available, including nuclear power (GHG-S-Nuclear), CCS (GHG-S-CCS), higher deployment of wind and solar (GHG-S-HiRenGrowth).

Fuels Supply

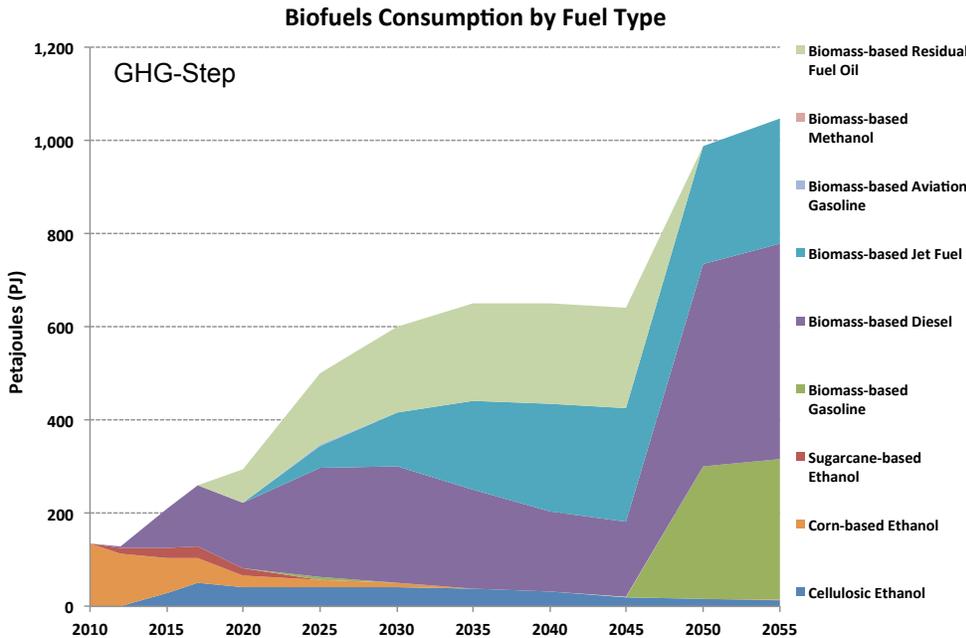


Figure PS.4 Biofuels production mix in GHG-Step scenario from 2010 to 2050

Interestingly, we found *less* biofuel use in GHG scenarios than in the BAU scenario. The rising price of oil (up to \$180/bbl in 2050) in the BAU prompts a shift towards substitute liquid fuels, though not all of this fuel is low carbon. The BAU scenario has a significant amount of gasoline substitutes (ethanol and bio-gasoline), comprising 43% of all biofuels production in 2050. In the GHG scenarios, gasoline substitutes account for less than 30% of fuels production. Biomass is used almost exclusively for the production of biofuels and there is very little competition from the electric sector across all scenarios. In GHG-Step scenario (Figure PS4), biofuels grow significantly by a factor of 8 between 2010 and 2050) to 1000 PJ (about 7.6 billion GGE), roughly 38% of transportation fuels demand across all modes. Other than gasoline substitutes, the remainder of biofuels production is used as diesel and jet fuel substitutes. This is due to the extent of electrification in the light-duty sector. The primary users of gasoline and ethanol are medium duty trucks, light duty cars and trucks, and marine personal boats.

Hydrogen is made primarily from natural gas, with some contribution from grid electrolysis. Without CCS or excess biomass supplies, natural gas steam reforming is the least carbon intensive means of producing hydrogen (as marginal electricity for electrolysis comes from natural gas generation)

Residential and Commercial Sectors

The residential and commercial sectors show substantial efficiency improvements and reductions in final energy demand due to the adoption of more efficient technologies as well as technologies that rely on electricity more than natural gas. In 2010, electricity accounted for 58% of commercial energy use and 40% of residential energy use. By 2050, electricity's share of final energy is 69% in commercial and 75% in residential. Overall, energy weighted efficiency for the sectors are 2.6 and 2.4 times higher in the commercial and residential sectors. This electrification of buildings is interconnected with the increased demand for more low-carbon electricity generation.

System Costs

Overall across all scenarios, the total emission reductions are 2,925 – 4,324 MMTCO₂e compared with BAU or 1,969 – 3,367 MMTCO₂e compared with BAU- LoVMT (attributing the benefits of VMT reductions in both the BAU as well as GHG scenarios as we are yet to estimate the costs of VMT reduction). The average mitigation costs are -\$110 (plus welfare loss, to be further estimated) to \$220/tonne CO₂e (or -\$51 (plus welfare loss) to \$73/tonne CO₂e with 4% discount rate) compared with BAU; and \$102 (plus welfare loss) to \$615/tonne CO₂e (or \$28 (plus welfare loss) to \$207/tonne CO₂e with 4% discount rate) compared with BAU-LoVMT. The results are summarized in Table 6.4 and Figure 6.42.

Mitigation cost curves, which are calculated as the mitigation costs divided by the level of GHG reduction, suggest that near-term costs (around 2020) can be very high (>\$500/tonne CO₂e) for the GHG-Line and GHG-S-HiOilGas scenarios. The high costs in the near-term reflect various constraints, such as policy, technology or growth constraints, which, when imposed on the system, lead to high short-term costs. More work is still needed to find out the factors/constraints contribute to the near-term high costs. Policy measures, such as allowing banking (and even possibly borrowing) of credits beyond 2020, or more flexible compliance across time periods can be adopted to smooth out the transition. This requires significant amounts of further research before we set the 2030 targets and corresponding policy measures to smooth out the transition. The results also suggest that certain technologies, such as CCS (GHG-S-CCS), biofuels (GHG-S-HiBio), changes in behavior (LowVMT, GHG-S-Elastic), or changes in markets (GHG-S-LoOilGas, and GHG-S-HiOilGas if biofuels are successful) can lead to very low mitigation costs prior to 2020. These results are summarized in Figure 6.43.

Key Conclusions

The CA-TIMES model is a useful tool for analyzing the evolution of the California energy system under different assumptions about low-carbon technologies and resources, and to understand how policy can shape that evolution. Some of the robust results from the modeling:

- We assume nuclear power and CCS are not available in the primary scenarios, and without these options, it is more difficult to meet the 80% GHG reduction target.
- Among all GHG scenarios, emission in 2035 range from 270 to 340 MMTCO₂e , including out-of-state marine and aviation emissions.
- Wind and solar produce 66% to 80% of generation in most GHG scenarios, which requires very large investments and a fast ramp up of capacity.
- Electricity must be decarbonized if GHG goals are to be met (the carbon intensity in all GHG scenarios is between 3 and 57 g/kWh).
- Battery and fuel cell powered vehicles are important and make up between 50% and 96% of light-duty vehicles in 2050.
- If CCS is available, biofuels production with CCS can provide significant negative emissions and offset petroleum usage.
- The residential and commercial sectors will increasingly rely on low carbon electricity (making up 69 to 75% of their final energy use)

Important Caveats to these Modeling Results

- The CA-TIMES model is a simplified representation of the California energy system.
- These scenarios are not predictions of the future, but rather a tool to understand how policy can shape that evolution given our assumptions of resource and technology availability and costs, and technological change over time.
- There is significant uncertainty in the technology and resource cost and availability.

TABLE OF CONTENT

SUMMARY FOR POLICYMAKERS..... 2

ABBREVIATIONS 10

1. INTRODUCTION 11

1.1 BACKGROUND AND MOTIVATION 12

1.2 CURRENT SNAPSHOT OF CALIFORNIA ENERGY USE AND GHG EMISSIONS..... 13

1.3 DRIVERS FOR FUTURE ENERGY DEMANDS AND EMISSIONS..... 15

1.4 STUDY GOALS 15

2. MODEL STRUCTURE AND MODELING APPROACHES 17

2.1 PRIMARY MODELING APPROACH: OPTIMIZATION 18

2.2 ALTERNATIVE MODELLING APPROACH: PARTIAL EQUILIBRIUM WITH ELASTIC DEMAND (ED) 20

2.3 USER CONSTRAINTS AND OTHER TECHNIQUES TO APPROXIMATE MARKETS AND BEHAVIOURS 21

3. ENERGY SUPPLY..... 23

3.1 OIL AND NATURAL GAS 24

3.1.1 *Supply curves*..... 24

3.1.2 *Oil refineries*..... 24

3.2 BIOMASS AND BIOFUELS 26

3.2.1 *Biomass supply curves*..... 26

3.2.2 *Biorefineries*..... 26

3.3 HYDROGEN PRODUCTION..... 28

3.4 ELECTRICITY GENERATION..... 29

3.4.1 *Timeslices*..... 31

3.4.2 *Power plants*..... 31

3.4.3 *Renewable wind and solar resources and transmission*..... 33

3.4.4 *New power plant costs and efficiency* 35

3.4.5 *Electricity imports*..... 36

3.5 GREENHOUSE GAS (GHG) EMISSIONS..... 37

4. DEMAND SECTORS 38

4.1 TRANSPORTATION..... 38

4.1.1 *Light-duty cars and trucks* 38

4.1.2 *Motorcycles* 39

4.1.3 *Medium-duty vehicles and heavy-duty vehicles* 39

4.1.4 *Buses*..... 39

4.1.5 *Passenger rail*..... 40

4.1.6 *Domestic freight (air, rail and shipping)* 41

4.1.7 *Domestic (interstate and intrastate) passenger aviation* 41

4.1.8 *Natural gas pipelines* 41

4.1.9 *Other transportation*..... 41

4.2 RESIDENTIAL END USE SECTOR 43

4.2.1 *End-use demand drivers* 46

4.2.2 *Temporal resolution of end-use demands*..... 48

4.2.3 *Characteristics of end-use technology*..... 49

4.2.4 *Calibration to 2010*..... 51

4.2.5 *Levelized cost and growth constraints*..... 51

4.3 COMMERCIAL END USE SECTOR 52

4.3.1	<i>End-use demand by time slice</i>	55
4.3.2	<i>Technology characteristics</i>	56
4.4	INDUSTRIAL SECTOR.....	57
4.5	AGRICULTURAL AND NON-ENERGY SECTOR.....	58
5.	SCENARIOS	60
5.1	REFERENCE SCENARIO.....	60
5.1.1	<i>Reference scenario policies</i>	61
5.2	GREENHOUSE GAS SCENARIOS.....	62
5.2.1	<i>Greenhouse gas scenarios policies</i>	62
5.3	SCENARIO VARIATIONS.....	63
6.	RESULTS	65
6.1	PRIMARY SCENARIOS.....	65
6.1.1	<i>Transportation Sector</i>	68
6.1.2	<i>Commercial, Residential, Industrial and Agricultural Sectors</i>	75
6.1.3	<i>Electric Sector</i>	80
6.1.4	<i>Fuels Supply Sector</i>	83
6.1.5	<i>Energy System Costs</i>	86
6.2	<i>Sensitivity Scenarios</i>	90
6.2.1	<i>New nuclear power</i>	90
6.2.2	<i>Carbon capture and sequestration</i>	91
6.2.3	<i>High renewable electricity growth</i>	92
6.2.4	<i>Oil and gas prices</i>	93
6.2.5	<i>Low battery and fuel cell costs</i>	93
6.2.6	<i>Higher biomass supply</i>	94
6.2.6	<i>Elastic demand (ED)</i>	95
6.2.7	<i>Comparison between sensitivity scenarios</i>	96
7.	DISCUSSION OF SCENARIO MODELING RESULTS	103
7.1	DISCUSSION OF MODELING APPROACH.....	103
7.2	DISCUSSION OF MODELING RESULTS.....	104
8.	NON-CORE EXPERIMENTAL TIMES MODELS/SCENARIOS	106
8.1	HYDROGEN INFRASTRUCTURE MODEL.....	106
8.1.1	<i>Spatial details of H2TIMES</i>	106
8.1.2	<i>H₂ infrastructure</i>	107
8.1.3	<i>Renewable hydrogen and carbon intensity policy</i>	108
8.1.4	<i>Base case modeling results</i>	109
8.1.5	<i>Future work</i>	111
8.2	CONSUMER VEHICLE CHOICE MODEL.....	111
8.2.1	<i>Motivation</i>	111
8.2.2	<i>Methodology</i>	111
8.2.3	<i>Preliminary Results</i>	114
8.2.4	<i>Future improvements needed</i>	116
8.3	PLUG-IN ELECTRIC VEHICLE CHARGING SCENARIOS.....	117
9.	CONCLUSIONS AND FUTURE WORK	120
9.1	KEY CONCLUSIONS.....	120
9.2	FUTURE WORK.....	121
10.	REFERENCES	123

APPENDIX A. COST OF ELECTRICITY GENERATION TECHNOLOGIES	127
APPENDIX B. ASSUMPTIONS OF TRANSPORTATION TECHNOLOGY COSTS, EFFICIENCIES, HURDLE RATES, ELASTICITIES, AND GROWTH/CAPACITY CONSTRAINTS	133
APPENDIX C. ASSUMPTIONS OF RESIDENTIAL AND COMMERCIAL TECHNOLOGY COSTS, HURDLE RATES, ELASTICITIES, AND GROWTH/CAPACITY CONSTRAINTS	138
APPENDIX D. POLICY DESCRIPTIONS FOR CA-TIMES SCENARIOS.....	152
APPENDIX E. MORE DETAILED SCENARIO RESULTS.....	156

ABBREVIATIONS

4E: Energy, economy, environment, engineering	kWh: kilo-water hours
AB32: Global Warming Solutions Act	LCFS: Low Carbon Fuel Standard
AC: Air conditioner	LDV: Light-duty vehicle
AFA: Annual availability factor	LNG: Liquefied natural gas
AFUE: Annual fuel utilization efficiency	LPG: Liquefied petroleum gas
BAU: Business-as-usual	LWR: Light water reactor
BEV: Battery electric vehicles	MFH: Multi-family housing
BTL: Biomass-to-liquid	MMT: million metric tonnes
BTU: British thermal unit	MSW: Municipal solid waste
CAFE: fuel economy standards	MDV: medium-duty vehicle
CARB: California Air Resources Board	NGCC: Natural gas combine cycle
CBTL: Coal/biomass-to-liquid	NGGT: Natural gas combustion (gas) turbine
CCS: Carbon capture and sequestration	NGST: Natural gas steam turbine
CEFF: Commodity-based efficiency	O&M: Operation and maintenance
CDD: Cooling degree days	OT: Once-through
CF: Capacity factor	PBMR: Pebble bed modular reactor
CHP: Combined heat and power	PHEV: Plug-in hybrid electric vehicle
CI: Carbon intensity	RC: Recycle
COP: Coefficient of performance	RECS: Residential Energy Consumption Survey
CREZ: Competitive Renewable Energy Zones	RES: Reference energy system
CRF: Capital Recovery Factor	RFO: Residual fuel oil
ED: Elastic demand	RPS: Renewable Portfolio Standard
EER: Energy efficiency ratio	RR: Rural region
EF: Energy efficiency	PJ: Peta joule
EFF: Energy efficiency	SEER: Seasonal energy efficiency ratio
EIA: Energy Information Administration	SFH: Single-family housing
FCV: Fuel cell vehicles	SMR: Steam methane reforming
FFV: Flex-fuel vehicle	t/d: Tonnes per day
FT: Fischer-Tropsch	TOU: time-of-use
GHG: Greenhouse gas	UA: Urbanized area
GT-MHR: Gas turbine-modular helium reactor	UC: Urban cluster
GWP: Global warming potential	VMT: vehicle miles traveled
H ₂ : Hydrogen	ZEV: Zero emission vehicles
HDD: Heating degree days	
HDV: Heavy-duty vehicle	
HSPF: Heating seasonal performance factor	
HWP: Harvested wood product	
IEA: International Energy Agency	
IGCC: Integrated gasification combine cycle	

1. INTRODUCTION

In 2005 and 2006, California took several initial steps to address the threat posed by climate change. First, Governor Schwarzenegger issued Executive Order S-3-05, which declared an aspirational goal for California to reduce its greenhouse gas (GHG) emissions to 80% below the 1990 level by 2050. Then, in 2006 Assembly Bill 32 (AB32), the “Global Warming Solutions Act” became law, setting a binding target that GHG emissions be brought back down to the 1990 level by 2020. AB32 included a requirement that specific plans were to be developed as to how the state might achieve the 2020 goal. The AB32 scoping plan (CARB 2009) provides a number of recommended actions to reduce emissions from a wide variety of sources and sectors and provides an important roadmap for achieving the near-term target. These policy measures include market-based mechanisms including cap-and-trade and a low-carbon fuel standard, and technology-specific standards and regulations including vehicle efficiency standards (commonly known as the Pavley standards), energy efficiency measures, a renewable portfolio standard (33% renewable electricity by 2020), truck and tire standards, etc. In contrast, the long-term 80% goal was set based on the anthropogenic emission rates needed in all industrialized countries to help stabilize atmospheric GHG concentrations at levels that would avoid dangerous climate change (IPCC 2007). There exists significant uncertainty as to how these deep emission cuts would be achieved, what they would cost, and what policy measures would be needed.

California’s population is projected to grow to 50 million by 2050 (California Department of Finance 2013), a 34% gain from the 2010 level. This will be accompanied by continuous growth in demand for energy to provide services across all sectors of the economy, from transportation, heating, cooling, lighting, refrigeration, to industrial activities. Meeting these demands also presents tremendous challenges in managing consumers’ spending on energy costs and consumer technologies from vehicles to light bulbs; business investments on boilers, heat and power generation, infrastructure, etc. How we combine the objectives of reducing GHG emissions to mitigate the impacts of climate change, and meeting the growing demand for energy services at costs that are manageable and acceptable to the consumers and the industry is one of the biggest challenges that the state is facing today.

This report describes the CA-TIMES, a 4E (Energy-Engineering-Environmental-Economic) model, that explores the potential of various technology and policy options for reducing GHG emissions while meeting the future energy demand in California by 2050. It is important to recognize that CA-TIMES is a cost-optimization or utility maximization (with elastic demand) model, which uses scenarios to describe views of the future and how to achieve policy objectives by either *minimizing costs* that are considered in the model (which typically include capital, fixed and variable O&M costs for energy supply, conversion, transport and end-use technologies) or *utility maximization* (which maximizes producer and consumer surplus) when solving with elastic demand. The model allows the consideration of consumer’s risk aversion toward uncertainties to new technologies, but does not take into account social or noneconomic factors (such as imperfect markets) that often create barriers for least-cost technology adoption. Therefore the outcomes of the model should not be considered as projections, but rather a roadmap to achieve policy objectives by minimizing the total system costs or total system utilities within a set of assumptions and constraints. Unlike a general equilibrium model, the model does not consider constraints on capital and labor, nor the feedback of GDP due to increased costs of mitigation (Loulou and Lavigne 1996).

We describe the general literature of energy modeling for energy and climate policy analysis, and California’s energy systems and GHG emissions in Section 1. Section 2 describes the model structure and modeling equations for solving the model via optimization (minimizing cost) vs. partial equilibrium (maximizing welfare) and how the model incorporates policies and consumer behaviors. The supply sector which include resource extraction, supply, and fuel production is described in Section 3. Section 4 describes the demand sectors including transportation, residential, commercial, and non-energy sectors. In Section 5, we present scenarios and results, and discuss the implications in Section 6. In Section 7, we

present several innovative stand-alone models that use TIMES algorithm (cost-minimization) to explore more advanced and complex modeling approaches. These stand-alone models are cutting edge research that demonstrates potential techniques to improve existing models, but are currently too computationally burdensome to be included in the core CA-TIMES model. We conclude our key observations and future research directions in Section 8.

1.1 Background and Motivation

Over the past several years, a variety of scenario analyses and energy modeling tools have been used to envision how deep cuts in GHG emissions can be made in the long-term, using commercial or near-commercial low-carbon and advanced technologies and fuels (IPCC 2007; GEA 2012; IEA 2012). These studies have shown protecting the global climate will necessitate dramatic changes in the way societies produce and consume energy. A robust finding of these studies is that the transport and electric sectors must be significantly decarbonized if deep economy-wide emissions reduction targets are to be achieved.

Several recent studies have looked at how California can achieve significant GHG emission reductions, on the order of 80 percent below 1990 level, as established in Executive Order S-3-05. For example, McCollum and Yang (2009) looked at snapshots of 2050 to see what combination of travel demand reductions, efficient vehicle technologies, and low-carbon alternative fuels could be used to meet an 80% reduction within the transportation sector. Similarly, the California Air Resources Board (CARB) examined how an 80% reduction could be achieved exclusively in the light-duty vehicle sector, primarily using zero-emission vehicles (ZEVs) to achieve the target (CARB 2009). Several recent studies look at multi-sectors in California, and how California might achieve deep GHG reduction between 2030-2050 from a pure technology perspective (CCST 2011; Long, John et al. 2011; CCST 2012; McCollum, Yang et al. 2012; Nelson, Johnston et al. 2012; Williams, DeBenedictis et al. 2012; Greenblatt 2013; Wei, Nelson et al. 2013). However, all the above mentioned scenario studies have some important limitations: they either do not take costs into consideration or lack a systems modeling approach: meaning that they fail to explicitly assess costs, the interactive effects of policies or markets, or adequately address critical questions relating to the optimal allocation of resources: both physical and financial.

While macroeconomic models such as E-DRAM¹ or Berkeley Energy and Resources (BEAR) model², two general equilibrium models of the California economy, can partially fill this void by capturing important system dynamics in the larger economy, these models lack the rich technological detail of bottom-up engineering economic approaches. Nevertheless, several macroeconomic models have been extensively used to assess the economic costs associated with meeting AB32 goals in 2020 as laid out by the Scoping Plan and to inform California's near-term climate policy discussions. The Energy2020 model has subsequently been used to provide more detailed energy system representation; the model links to E-DRAM and attempts to understand the energy supply and demand technologies that could be utilized to meet the AB32 goal in 2020 (ICF 2010). For longer-term analyses, as California continues to move forward with a broad spectrum of carbon emissions reduction policies, there is a strong need for new tools that are able to provide strategic guidance to decision makers and to help them envision the multiple paths to a low-carbon society. Table 1.1 provides a list of energy-economic-environment models calibrated for California, modeling types and the type of questions in can address based on the construction of these models. The CA-TIMES model attempts to fill an important gap in the California energy policy space by offering a transparent and flexible analysis platform that can address the specific conditions that exist within the state.

¹ http://www.arb.ca.gov/cc/scopingplan/document/economic_appendix2.pdf

² http://are.berkeley.edu/~dwrh/CERES_Web/Docs/BEAR_Tech_2.0.pdf

Table 1.1. California state-wide energy-economic-environment models that have been applied to analyze state energy and climate policies.

Model Name	Modeling Teams	Modeling Type	Type of Questions That It Can Address
E-DRAM*	UC Berkeley	Computable general equilibrium (CGE) model	Detailed emission and energy use patterns. Change in output, prices, employment, personal income and consumer spending
Berkeley Energy and Resources (BEAR) model	UC Berkeley	Computable general equilibrium (CGE) model	Detailed emission and energy use patterns. Change in output, prices, employment, personal income and consumer spending
CA-TIMES	UC Davis	Economic optimization (cost minimization or utility maximization) model	Energy use and technology adoption <i>driven by economics</i> of resources and technology costs for both supply and demand across all sectors)
SWITCH	UC Berkeley and LBNL	Detailed electric sector optimization (cost minimization) model soft linked with other energy models	Electric sector capacity expansion, generation/reliability trade-offs, optimization of the generation and storage mix, electricity prices, demands. SWITCH models for the rest of the energy system including electrified transportation.
Energy 2020*	ICF	Simulation model based on qualitative choice theory (maximize utility within constraints of imperfect market)	Energy use and technology adoption. When linked to macro-economic model provides economic changes resulting from policies (GDP, employment, personal disposable income, etc.)
The California Greenhouse Gas Inventory Spreadsheet (GHGIS) Model	Lawrence Berkeley National Laboratory	Scenario-based non-economic models	Explore the extend of individual policies and the impact of combinations of state policies on state greenhouse gas (GHG) and regional criteria pollutant emissions
IEPR	CEC	Scenario-based. Combination of models for the different parts of the energy system.	Energy use, technology adoption. The CEC suite of models are being used only up to 2030
AB32 Scoping Plan	CARB	Scenario-based non-economic models	Energy use, technology adoption, policy strategies
Vision Project	CARB	Scenario-based non-economic models	Transportation energy use, technology adoption, policy strategies
E3*	E3	Scenario-based non-economic models	Electricity and natural gas utility sectors only. Analyze how climate policies affect utility costs and consumers' electricity bills

* Model that participated in the last Scoping Plan to 2020.

1.2 Current Snapshot of California Energy Use and GHG Emissions

California has the highest population among all states, and ranks 16th in personal income. Although California's per capita energy use, energy intensity (thousand Btu per dollar of GDP) and per capita GHG emissions are among the lowest 10% among all US states, the total GHG emission rank is the second highest, about 50% of the highest emitting state Texas (EIA 2013). California's petroleum and electricity prices are well above the U.S. average, and its electricity generation mix has a lower carbon intensity than the U.S. average. Historically, California has had some of the most aggressive energy and environmental policies in the country, including policies addressing GHG and air quality emissions, and vehicle and building energy efficiency standards.

Figure 1.1 (left) shows energy consumption (including energy losses associated with electricity generation, transmission, and distribution) in the state, for a total of 7846 trillion Btu in 2010.

Transportation alone contributes to 46% of total primary energy consumption, while the demand for electricity and natural gas (which are consumed in end use sectors including industrial, residential, commercial and agricultural sectors) constitute the majority of the rest. Transportation petroleum fuel use constitutes about 60% of total fossil energy use (Figure 1.1, right).

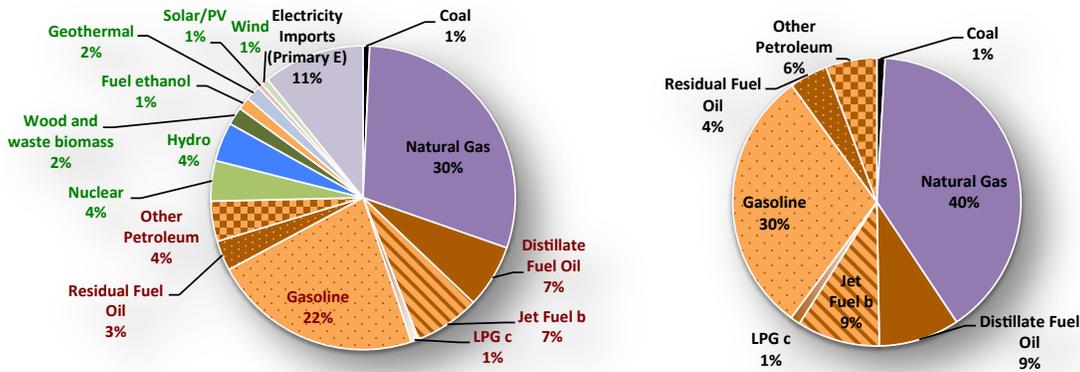


Figure 1.1. Total energy consumption (left) and fossil energy (right) (including energy losses associated with electric generation, transmission, and distribution) for California, 2010. Total energy consumption in 2010 is 7846 Trillion Btu (left), of which 85% comes from fossil energy (right, 5854 trillion Btu). Source: (EIA 2013)

The single largest contributor to emissions in California is the transportation sector, accounting for 45% of total emissions (CARB 2013)(Figure 1.2) (35% comes from in-state emissions, while the other 10% (51.4 million metric tonnes CO₂ equivalent) comes from domestic and international aviation and international marine bunker fuel use. These emissions are reported but not included in the state emission inventory). Electricity generation (in state and imports) accounts for only about 18% of total emissions, while industrial (20%), residential (6.4%) and commercial (4.3%) sectors make up the rest (CARB 2013).

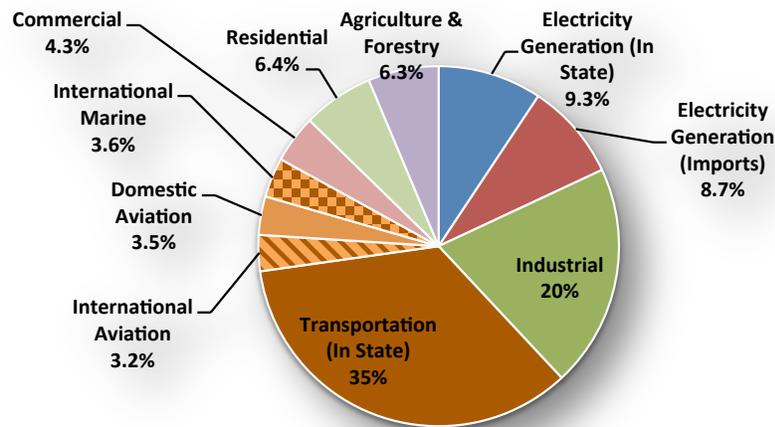


Figure 1.2. State-level GHG emissions in 2010. Source: (CARB 2013). Total emissions are 449.37 million metric tonnes CO₂ equivalent and 500.74 million metric tonnes CO₂ equivalent when domestic and international aviation and international marine bunker fuel use are included.

The relatively small contribution to emissions from California’s electricity sector is important to recognize, as electric generation has been identified in a number of studies and contexts as one of the least costly sectors to decarbonize (Yeh, Farrell et al. 2008; IEA 2012; McCollum, Yang et al. 2012). The large proportion of emissions from the production and use of fuels (e.g., natural gas and liquid transportation

fuels) means that meeting an 80% reduction in emissions requires improving efficiency of fuel use and significantly shifting the final energy consumption to low-carbon fuels and electricity, both of which represent some potentially challenging propositions (CCST 2011).

1.3 Drivers for Future Energy Demands and Emissions

California’s population is projected to grow to 50.3 million by 2050 (California Department of Finance 2013), a 34% gain from the 2010 level. This will be accompanied by continuous growth in demand for energy to provide services across all sectors of the economy, from transportation, heating, cooling, lighting, refrigeration, to industrial activities. This projection of population growth differs significantly from recent projections of 59.5 million (from 2007) and 54.8 million (from 2004) in 2050. Thus, projections of energy demand, service demands and emissions made in the last few years and policy analyses that relied on these projections may differ significantly in their results.

In the past two decades, California primary energy use and GHG emissions have grown slower than population growth and GDP increase (Figure 1.3) due to policies such as energy efficiency measures for vehicles and for consumer appliances. Energy efficiency improvements reduce energy use while delivering the same energy service (e.g. heating, cooling, lighting, vehicle miles). Thus our model builds on a more robust estimate, i.e. energy service demand as opposed to primary or final energy demand, that allows for endogenous technological changes to take place in spite of demand growth. Changes in service demand via structural changes, such as denser cities that reduce demand for vehicle travels or shifting from heavy industry to service industry, can not be modeled endogenously in our model but can be modeled as separate scenarios. Making a clear distinction of drivers of changes, and how policy levers can affect these drivers, is essential for understanding our model results and analyses.

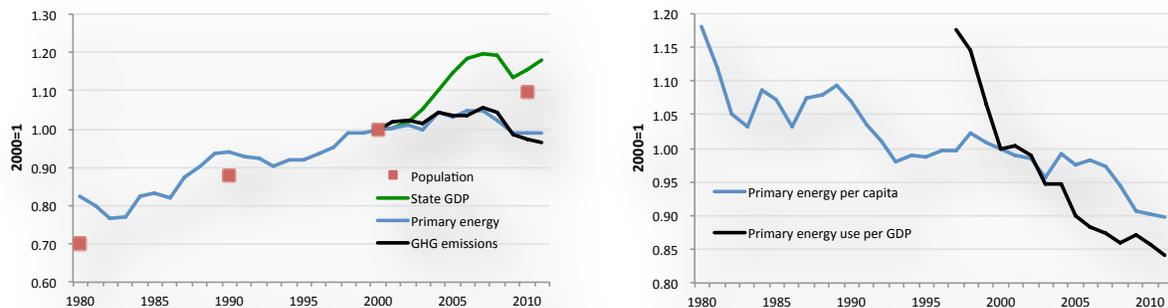


Figure 1.3. Historical trend of California population, GDP (in constant dollar), primary energy use and GHG emissions (left) and energy use per capital and per GDP. Source: (CA DOF 2013; CARB 2013).

1.4 Study Goals

The purpose of this particular study – and the CA-TIMES model in general – is to provide strategic guidance to California decision makers. We aim to produce policy insights, for example, on how economic drivers (such as technology and resource cost considerations, and competition among technologies) and policies (such as an emissions trading scheme, renewable portfolio standard for electricity, biofuels mandates, and vehicle tailpipe emissions standards) might affect future decisions on the investment of future energy technologies and utilization of resources under various scenarios. Our overall intent is to develop an improved understanding of the structure, operation, and cost of the future California energy system under different sets of assumptions about future population, GDP, demand growth, technology availability, and energy and environmental policies. Specifically, we analyze the optimized technology options and trajectories for meeting California’s 80% reduction goal for 2050.

With an eye toward policy design and formulation, the insights from this modeling exercise are intended to provide useful information for California policymakers as they seek to understand which energy sectors

and technologies can (or should, under an optimization framework) play a role in both near- and long-term reductions in GHG emissions, considering the state's specific and unique context. At the same time, because of the CA-TIMES model's rich characterization of the energy supply sectors of the economy (including fuel supplies (e.g. hydrogen, biofuels) and electric generation), and energy demand sectors (including transportation, residential, commercial, industrial and agriculture³), we can explore the interactions effects within and across the supply and demand sectors in response to policies. For example, policies to encourage bio-based renewable electric generation (e.g. electricity generation from wood or biogas) and hydrogen production will reduce the availability of biomass for biofuels in the transportation sector.

The results from the modeling exercise can be applicable to the much larger community of energy and environmental policy analysts and modelers outside of California, particularly those focusing on the challenges of – and solutions to – rapid growth in decarbonizing the economy.

³ The industrial and agricultural sectors are not modeled with the same level of technological detail as the other sectors listed, but are handled more simply with scenario-based energy demands.

2. MODEL STRUCTURE AND MODELING APPROACHES

The California TIMES (CA-TIMES) model is an integrated energy-engineering-environmental-economic (4E) systems model focusing on the California energy system. The model is both rich in technological detail and covers all sectors of the California energy economy, including energy supply (such as feedstock (including oil, gas, and biomass), fuel production/conversion, fuel imports/exports, electricity production, and fuel delivery), and demand (i.e. residential, commercial, industrial, transportation, and agricultural end-use sectors). Figure 2.1 presents a highly simplified schematic of the reference energy system (RES) of the CA-TIMES model. Demands for energy services in transportation, residential and commercial sectors drive the demand for end-use technologies and energy carriers, the latter of which must be supplied by fuel and electric generation plants powered by a range of fossil and renewable energy resources. Demands for industrial and non-energy sectors are modeled simplistically at the fuels level; therefore no end-use technology details are represented in these two sectors.

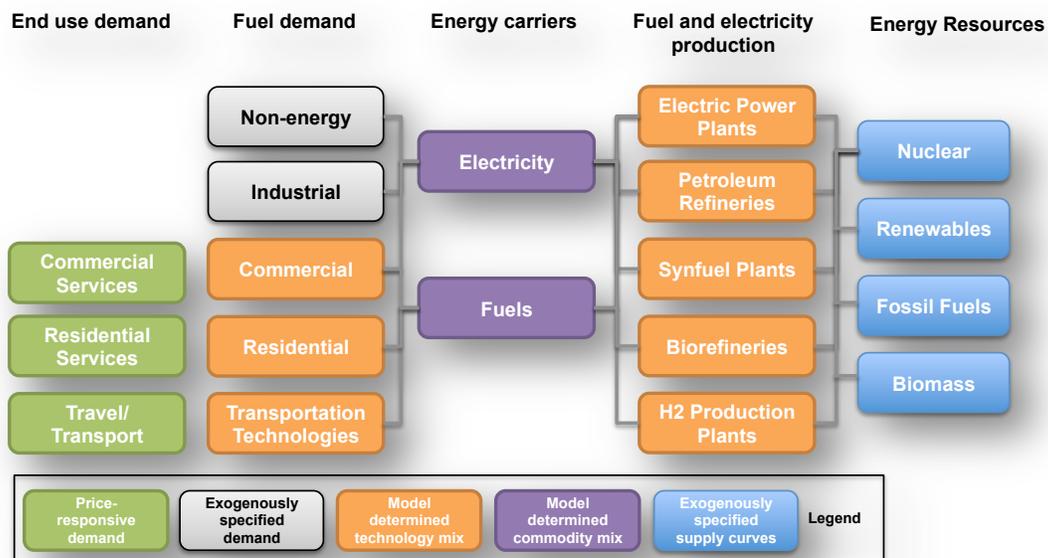


Figure 2.1. Schematic diagram of CA-TIMES model (version 1.5).

Developing and running CA-TIMES requires a substantial quantity of data inputs, including cost, efficiency and other assumptions for individual technologies in all time periods up to 2055. CA-TIMES model development is an ongoing process that will span several years. The model description and analysis described in this report refers to the first public version of the model, CA-TIMES v1.5, as opposed to the first version of the model (CA-TIMES v1.0) of which results were published without the database (McCollum, Yang et al. 2012) due to the ongoing nature of research efforts. The CA-TIMES v1.5 is updated and re-calibrated to the year 2010 as the base year. All the costs represented in the model now are in 2010 dollar values. Below we briefly describe the model structure, with more detailed descriptions in the following sections and Chapters.

Demand. Energy service demands (e.g. lighting, heating, cooling, and vehicle miles travelled) are estimated exogenously based on demand drivers such as population growth, GDP, # of housing units, and square footage of commercial space for the residential and commercial sectors. The industrial and agricultural demands are treated fairly simply by projecting the future fuels of these sectors use based on historical trends. We also run certain set of scenarios which demands are endogenous in responsive to

own price changes by specifying the price elasticities of service demands. This will be explained further in Section 2.2.

Supply. The supplies for primary energy are represented as *supply curves*. In some cases (e.g. oil and gas from outside of California), the supply curves are exogenous projections from the Energy Information Administration based on the belief that demand level changes in California will not affect fuel prices in the US and rest of the world. Some are represented as step functions of annual potential (e.g. maximum available biomass at a given price, or available wind or hydro potentials). There are also trading possibilities where the amount and prices of the traded commodities are determined endogenously (within any imposed limits) or exogenously (for a pre-specified price and quantity).

Policy. The all-encompassing nature of TIMES model allows a wide-range of policies to be represented in the model. This can range from explicit fuel taxes, technology subsidies, or carbon taxes that can be added directly to a technology, or products (e.g. finished fuels or emissions) to more elaborate policy measures such as renewable portfolio standards (RPS), energy efficiency standard for appliances and vehicles, or an emission cap that can be represented as constraints in the market share, technology penetration level, or total emission levels.

Technology. In TIMES, the transformation of primary resources into energy services are represented by a series of technical and economic parameters for technologies (or processes) that transform energy resources into fuels, materials, energy services, and emissions. The quality of a TIMES model rests on a rich, well developed set of technologies and technology assumptions (in terms of costs, efficiency, availability, etc), both current and future, for the model to make decisions in respond to both exogenous and endogenous changes in drivers, scenarios, policies, etc.

2.1 Primary Modeling Approach: Optimization

CA-TIMES is built upon the MARKAL-TIMES optimization framework, which is used by dozens of research groups and energy agencies throughout the world (Loulou and Labriet 2008). The objective of the model is to meet future fixed energy service demands at minimum global cost (i.e., the minimum total discounted net present value (NPV) of all costs accounted for in the model) subject to a large set of technical, social and policy constraints. CA-TIMES identifies the most cost-effective technology pathways and resources options that will enable the state to transition to deep reductions in GHG emissions. Such an optimization approach can be described as representing a single decision maker with “perfect foresight”, as the model possesses full information about all future demands, technologies and resources and makes the least-cost investment and operating decisions throughout the modeling years in order to minimize the present value of all system costs.

$$NPV = \sum_{y \in YEARS} (1 + d_y)^{REFYR-y} (ANNCOST(y) + FIXCOST(y) + VARCOST(y) + ELASCOST(y) + \dots)$$

(Equation 2.1)

where,

NPV	= net present value of the total system costs;
d_y	= general discount rate;
REFYR	= reference year for discounting;
YEARS	= set of years for which there are costs, including all years in the horizon;
ANNCOST	= annual costs of investment. Each yearly payment is equal to a fraction CRF of the investment cost, INVCOST (CRF = Capital Recovery Factor, see Section 2.3 Hurdle Rate for mode discussion on CRF);

FIXCOST = fixed annual costs;
VARCOST = variable annual costs
ELASCOST = cost of demand reduction, the value is 0 when the model runs only with cost minimization (without elastic demand)

Additional costs terms such as investment taxes and subsidies, decommission costs, taxes and subsidies attached to fixed annual costs, salvage values of investments, etc can also be added when appropriate.

For most cases, the objective of the CA-TIMES model is simply the minimization of the total cost of meeting exogenously specified level of energy service, as illustrated in Figure 2.2. We also run scenarios of alternative demand scenarios given structural changes (e.g. reduced travel demands due to the success of land use policies or other demographic changes), but these changes are exogenous that do not respond to price changes.

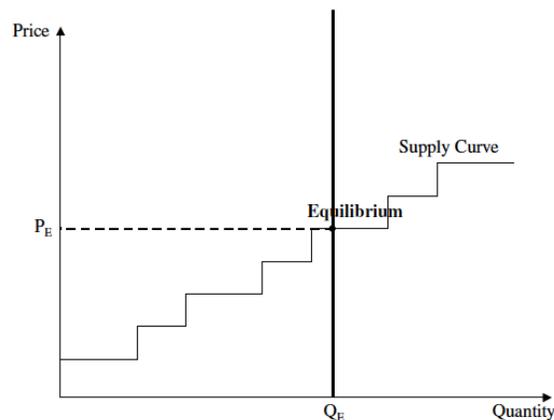


Figure 2.2. Equilibrium when an energy service demand (Q_E) is fixed. Source: (Loulou, Remne et al. 2005).

The decision variables in the model are technology investment, retirement, operation (activity levels and storage), primary energy supply, and energy trade decisions (i.e. level of imports). The key advantage of the CA-TIMES model is that it is a vertically integrated model of the entire extended energy system within California. For example, if there is an increase in residential electricity demand relative to the reference scenario (perhaps due to a shift from natural gas furnaces to electric heat pumps), either existing electricity generation must be used more intensively or new generation must be installed. If the demand has a distinct time profile, then the increased generation must also match the time profile of the increased demand. The choice by the model of the electricity generation equipment (type and fuel) is based on the analysis of the characteristics of alternative generation technologies, on the economics of the energy supply, and on environmental criteria if there is a constraint on emissions (Loulou, Remne et al. 2005).

In this respect, CA-TIMES (like all models) represents a simplification of reality. Also like all models, it has many caveats and the results of the model should be interpreted with great caution. For example, the optimization model makes all future technology investment decisions based on levelized costs captured in the model, and lacks consideration for non-economic behaviors such as consumers'/producers' attitudes toward technology risks, uncertainties of future costs (including technology costs and fuel costs) and policies, and social aspects of decision making (e.g. non-competitive markets) that cannot be captured based on costs alone.

Modeling simplifications and caveats:

- Single decision maker in CA-TIMES vs. millions of individual decision makers in reality (In Chapter 8.2, we introduce a technique that has generated broad interest by incorporating consumer heterogeneity into the model)

- Decision making with perfect foresight and no uncertainty
- System cost (the sum of net present values of all technologies and resource costs) is the only criteria to be optimized to meet energy service demands subject to user constraints.
- Exogenous assumptions on technology availability and costs changes over time. Though the model can simulate endogenous technological change (ETL) via the implementation of *learning curves* in which the costs of technologies decrease as a function of increased technology penetration, such model advancement is not implemented in this version of the model.
- Representation of non-economic decision-making factors (such as risk and uncertainty) with the use of higher discount rates (i.e. “hurdle” rates), which serve to discourage investments.
- No feedback between the energy sector and state GDP. Macroeconomic variables such as state production, consumption, and savings can be affect by policies such as energy and environmental policies. CA-TIMES relies on exogenous projections of state GDP. If other studies suggest that there is an observable linkage with state GDP, this can be handled as scenarios rather than simulated within the model.

2.2 Alternative Modelling Approach: Partial Equilibrium with Elastic Demand (ED)

In addition to exogenous assumptions of possible structural changes as described in the previous section, we also run scenarios when demand for energy services is responsive to price changes. When the demand is endogenous, CA-TIMES computes a partial equilibrium on energy markets. This means that prices of energy will match exactly the amounts that the consumers are willing to buy. This equilibrium feature is present at every stage of the energy system: primary energy forms, secondary energy forms, and energy services.

When the demands respond to supply price changes, instead of minimizing total system costs, the supply-demand equilibrium model maximizes the total surplus, defined as the sum of suppliers and consumers surpluses, as shown in Figure 2.3. Following the Equivalence Theorem, maximizing total surplus (consumer surplus + producer surplus) is also the same as minimizing the total discounted system cost and the cost of demand reduction (Loulou and Lavigne 1996), also shown in Figure 2.3. The demand curve shown in Figure 2.3 is represented by:

$$D/D_0 = (P/P_0)^{Elastic} \quad \text{(Equation 2.2)}$$

Where (D_0, P_0) is a reference pair of demand and price values for that energy service for a given time period, and *Elastic* is the (negative) own price elasticity of that energy service demand.

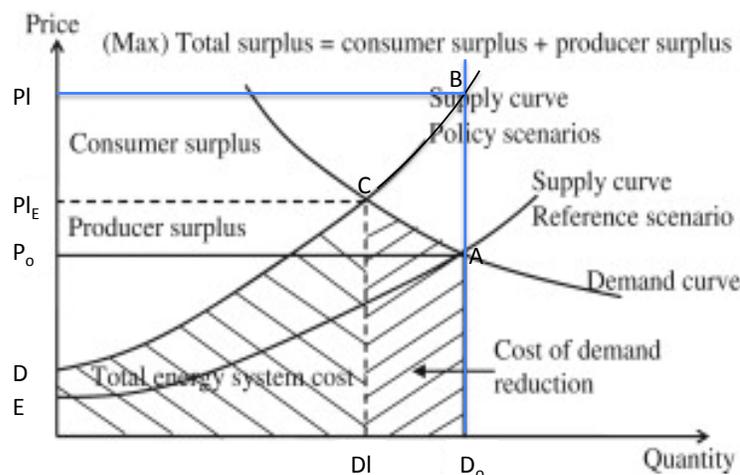


Figure 2.3. Illustration of supply-demand equilibrium with elastic demand. Source: (Kesicki and Anandarajah 2011).

By definition, given the value of elasticity is always smaller than or equal to zero, the sum of total energy system costs *with* elastic demand (the area surrounded by DICD) plus the cost of demand reduction (loss of consumer welfare, the area surrounded by D_0ACDI in Figure 2.3 and ELASCOST in Equation 1) will always be smaller than the total energy system costs without elastic demand (the area surrounded by D_0BD), i.e.

Total energy system costs *with* elastic demand (the area surrounded by DICD) + Cost of demand reduction (loss of consumer welfare, the area surrounded by D_0ACDI) < Total energy system costs without elastic demand (the area surrounded by D_0BD)

This means that the compliance costs that we calculate for meeting GHG policy targets will always be smaller with elastic demand compared with the estimated compliance costs without ED. Instead of investing in more expensive technologies to meet a fixed demand (point B in Figure 2.3), consumers also have the options of reducing service demand (point C in Figure 2.3), resulting in lower energy costs (PI_E as opposed to PI) and lower investment costs (the area surrounded by DICD as opposed to the area surrounded by D_0BD).

2.3 User Constraints and Other Techniques to Approximate Markets and Behaviours

It is often the case that in order to approximate imperfect market or non-market behaviors, such as those caveats that we mentioned in the previous section, we use a number of “modeling tricks” to constrain the model. These modeling techniques, typically based on the intuition of modelers or historical observations, are briefly described below.

Constraints on technology growth rate

Due to the optimization nature of the model, new investments in least-cost technology tend to constitute 100% market share of the new technology stock if there are no other user constraints. This is often referred to as the “all-or-nothing” behavior of optimization models. Therefore a typical practice is to apply growth rate constraints in controlling the penetration of technologies over time. A growth constraint may for example express that the capacity increase between two periods is limited by an annual growth rate. This is intended to approximate (in a simplistic and exogenous fashion) real world constraints such as the time it takes to expand plant capacity, build enough new production plants or infrastructure. Or it can be due to heterogeneity of consumers where it takes new technologies significant time to capture the entire market. These constraints can be binding or non-binding. When binding, these constraints play an important role in determining the outcomes of the scenarios. Therefore, the assumptions of growth rate constraints are documented in Appendixes B and C and alternative assumptions of growth rates constraints are explored in the scenario analysis.

Hurdle Rate

In CA-TIMES model, investments in technology are based on the levelized costs of technology: the technologies with the lowest levelized costs are selected to meet end-use demand. However, there is a wide-recognition that “efficiency gaps” exist and consumers behave as if they have high discount rates (Greene, German et al. 2009; Greene 2011; Gillingham and Palmer 2013). A variety of explanations, such as consumer preferences, consumer heterogeneity, hidden costs, risk aversion to uncertainty, and information gaps have all being offered as possible explanation. We approximate this behavior by assigning a higher technology-specific discount rate to each consumer technology based on literature, and they are documented in Appendixes B and C and we also explore alternative assumptions in the scenario analysis.

In TIMES, investment in technology results in a stream of annual payments spread over the economic life of the technology (ELIFE), similar to financing the purchase with a loan. Each yearly payment is equal to

a fraction CRF of the investment cost (CRF = Capital Recovery Factor). Note that if the technology discount rate is equal to the general discount rate (which is set at 4% in the model), then the stream of ELIFE yearly payments is equivalent to a single payment of the whole investment cost, in as much as both have the same discounted present value (Loulou, Remne et al. 2005). If however the technology’s discount rate is chosen different from the general one (usually higher), then the stream of payments has a different present value than the lump sum. Note that:

$$CRF = \frac{1 - \frac{1}{1+r}}{1 - (\frac{1}{1+r})^{ELIFE}} \quad \text{(Equation 2.3)}$$

Where r = technology specific discount rate (often referred to as the hurdle rate), and ELIFE is the economic lifetime of technology.

Table 2.1 illustrates the relation between hurdle rate, CRF, annual payment, and net present value of the technology. Using an example of a technology with an investment cost of \$1 million and an economic life of 15 years, based on different technology hurdle rates and a general discount rate of 4%, the annual payment and net present value of investment is calculated using the following formulas:

$$Annual\ payment = CRF \times Investment\ cost \quad \text{(Equation 2.4)}$$

$$Perceived\ net\ present\ value\ by\ customer = \sum_{i=1}^{ELIFE} \frac{Annual\ payment}{(1+gr)^i} \quad \text{(Equation 2.5)}$$

Where g = general discount rate

Table 2.1. An example of technology-specific discount rate, CRF, the annual payment and perceived net present value by consumers (assuming ELIFE = 15, investment cost = 1 M\$).

Technology specific discount rate (hurdle rate), r	0.04	0.08	0.12	0.16	0.2	0.24	0.28	0.32
Capital recovery factor, CRF	0.09	0.11	0.13	0.15	0.18	0.20	0.22	0.25
Annual payment (M\$)	0.09	0.11	0.13	0.15	0.18	0.20	0.22	0.25
Perceived net present value (M\$) by consumers	1.00	1.22	1.45	1.67	2	2.22	2.45	2.78

It can be seen in Table 2.1 that if the technology hurdle is equal to the general discount rate, the net present value perceived by consumers is equal to the actual investment cost (1 million dollars). With the increase of technology hurdle rate, the perceived upfront cost by consumers goes up to around 2.78 million dollar (with a hurdle rate of 32%). Since fixed and operating costs (which include fuel costs) are discounted based on the general discount rate (4%), the higher values of r, the more expensive the upfront investment costs compared with fuel savings, and the greater the efficiency gap.

While such a modeling technique is a good approximation of consumer behaviors resulting in simulated purchase decisions of technology adoption by consumers, these costs (through CRF multiplier) are not the actual costs that consumers pay nor real costs to the economy. Therefore, when calculating the abatement costs of policies, we use the real discount rate instead of hurdle rate. In other words, technology hurdle rates are only used to simulate the penetration of consumer technologies but not the actual costs of abatement.

3. ENERGY SUPPLY

The energy and fuel supply sector in CA-TIMES covers the extraction of all primary energy resources as well as the conversion and transport of processed fuels (i.e., secondary and final energy carriers). It is the largest, most complex sector represented within CA-TIMES, encompassing everything within the three rightmost columns of Figure 2.1 except for electric power plants.

The model represents the production of primary energy resources with supply curves of varying complexity. These fuel supplies are discussed in greater detail in the sections below. In CA-TIMES, most primary energy resources are imported into the state and delivered to fuel conversion facilities, such as oil refineries, bio-refineries, and synfuel and hydrogen production plants. Most of these plants are assumed to have fixed investment costs and efficiencies that exogenously change over time throughout the modeling period. Often the cost assumptions used in this model do not capture the very high costs of the first few plants, but represent mature technologies that are commercially available. In Chapter 8.1, we explore the spatially optimized hydrogen infrastructure built out over time; but that level of modeling details is not typically represented in CA-TIMES. CA-TIMES also allows for finished fuels (e.g., biofuels, refined petroleum products) to be imported into the state as well. Supply curves are specified for each of these imported commodities. Dozens of fuel transport and delivery technologies are used in CA-TIMES to distribute the various primary and final energy commodities to the fuel conversion and end-use sectors. Along the way, production, transport, and delivery costs are assigned, and upstream emissions are allocated. Figure 3.1 shows the schematic representation of the CA-TIMES model with the sectoral details.

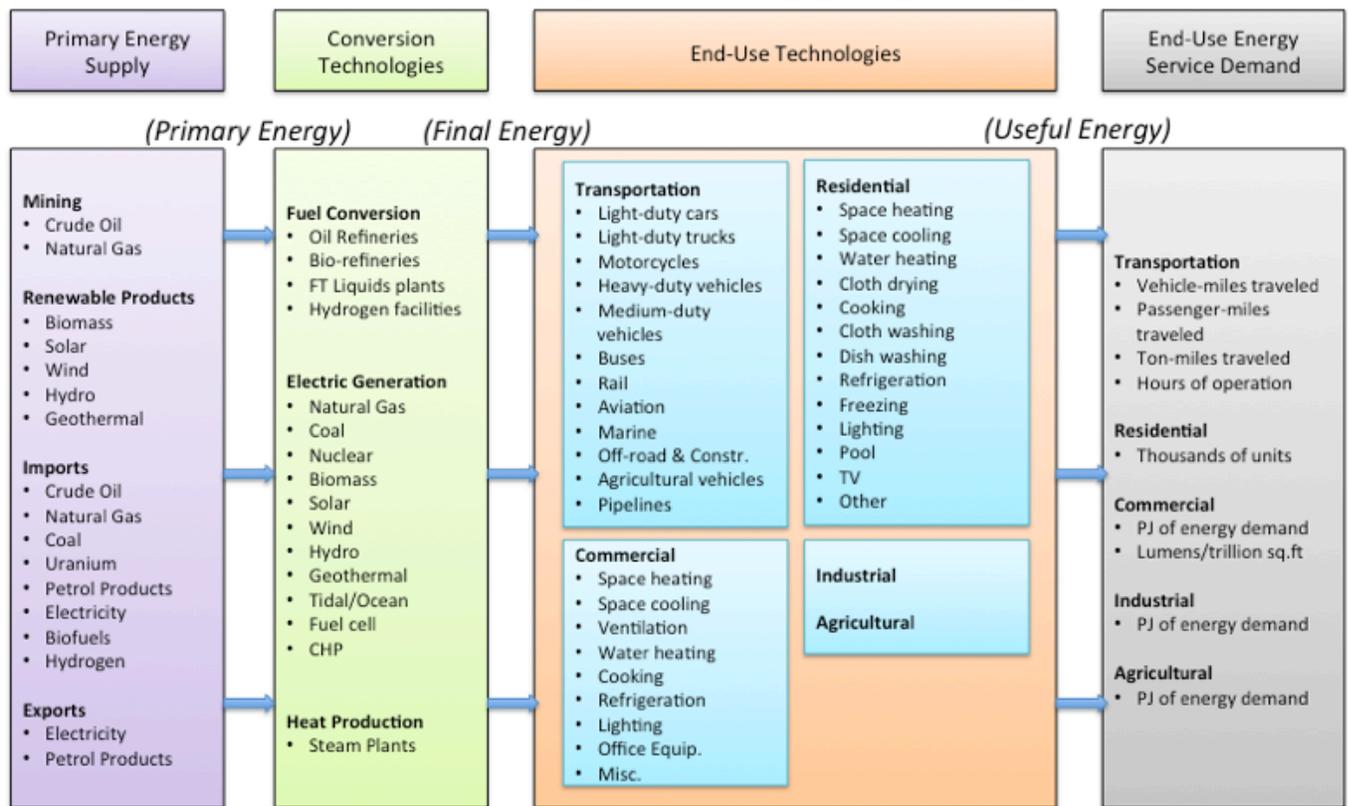


Figure 3.1. Schematic Representation of CA-TIMES Model

3.1 Oil and Natural Gas

3.1.1 Supply curves

Crude oil and natural gas are treated very simply (exogenous price projections), as California is assumed to be a price-taker for both resources. Figure 3.2 shows price projections of crude oil and fossil natural gas in the reference scenario and high-low price scenarios. The model also allows for imports of finished fuels from outside the state, such as natural gas (via pipeline or LNG), refined petroleum products (e.g., gasoline diesel, jet fuel, kerosene, residual fuel oil, etc.). Natural gas can also be produced from bio-based resources such as bio-methane.

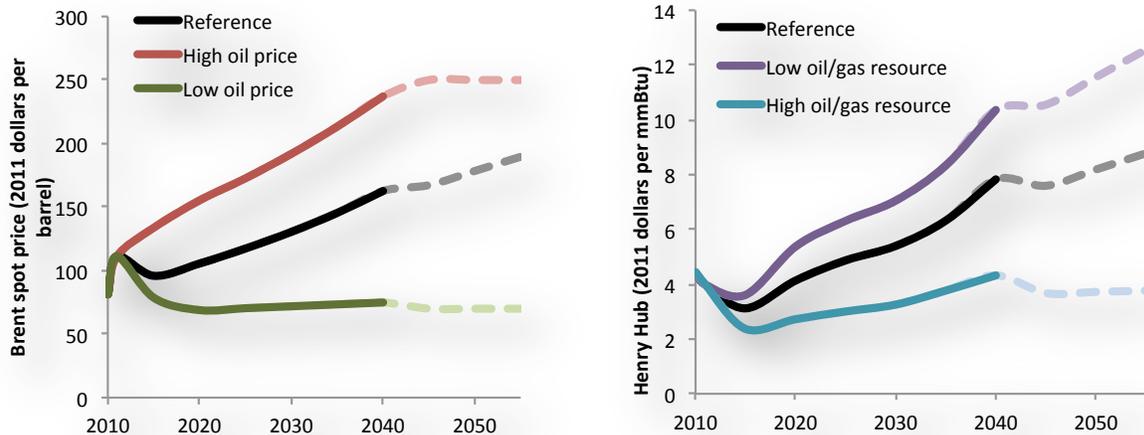


Figure 3.2. Crude oil (left) and natural gas (right) price projections assumed in CA-TIMES v1.5. Source: (EIA 2013). Dashlines represent our own extrapolation from 2040 to 2055.

3.1.2 Oil refineries

The refinery technology in CA-TIMES is able to flexibly produce a range of different petroleum products, taking crude oil, natural gas liquids, natural gas, and electricity as inputs (Figure 3.3). Crude oil and natural gas liquids are feedstock inputs (i.e., their carbon and energy content is converted into the fuel products), while the remaining energy carriers are combusted at the refinery in order to generate energy/heat for the various refining operations. In addition, a small fraction of the input crude oil is also combusted. Hydrogen is produced as an intermediary product/input at the refinery using natural gas steam methane reformation, though this process is not explicitly modeled. The outputs produced at the refinery include distillate heating oil #2, low-sulfur highway diesel (<500 ppm S), ultralow-sulfur highway diesel (<15 ppm S), conventional gasoline, reformulated gasoline, jet fuel, kerosene, high-sulfur residual fuel oil, low-sulfur residual fuel oil, liquefied petroleum gases (LPG), methanol, petrochemical feedstocks, asphalt, and petroleum coke (Figure 3.3).

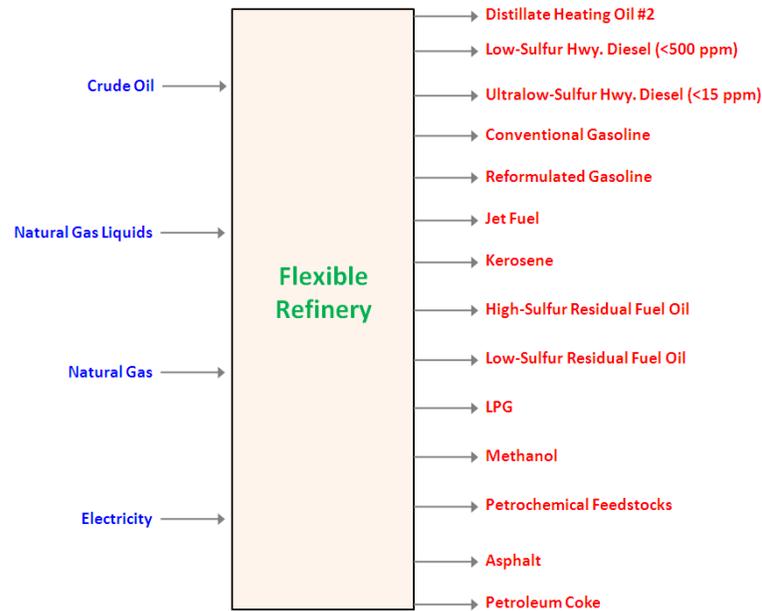


Figure 3.3. Simplified schematic of flexible refinery technology in CA-TIMES.

Reflective of a real-world refinery, the flexible technology in CA-TIMES is constrained from over-producing each fuel product by setting an upper limit on the share of total refinery output that can come from a particular fuel. These fuel product splits are relaxed slightly over time (Table 3.1), and along with refinery efficiencies and resource inputs, they are calibrated to the base-year 2010, using data from the CEC’s Energy Almanac (CEC 2010), the EIA Petroleum Navigator (EIA 2010), and the assumptions to the Petroleum Market Module of the EIA’s NEMS model (EIA 2010). Through process known as “capacity creep”⁴, the existing stock of California refineries is allowed to expand over time. Estimates of future refinery creep for California refineries have been put at about 0.45% per year according to the CEC (CEC 2010), from 4621 PJ in 2005 to 5784 PJ in 2055. Thus, the state’s refining capacity is able to grow, albeit with a much smaller capital outlay than would be expected if a “greenfield” refinery were to be built on a new site. Such greenfield expansions are also possible in the model through investments in a future refinery technology. Refinery efficiency is kept constant and capacity at 89% at all years.

Table 3.1. Assumptions of refinery inputs and maximum shares of outputs in 2010 and 2055.

	2010	2055
Input (unit energy input per 1 unit energy output)		
Oil	1.110	
Natural gas	0.028	
Electricity	0.003	
Output (maximum share per 1 unit energy output)		
Distillate-Low Sulfur Highway Diesel (500 ppm)	0.037	0.037
Distillate-Ultralow Sulfur Highway Diesel (15 ppm)	0.165	0.165
Conventional Gasoline	0.058	0.058
Reformulated Gasoline	0.431	0.431
Kerosene-type Jet Fuel	0.166	0.166
Kerosene and Other Refined Products	0.015	0.015
LPG	0.024	0.024

⁴ Refinery capacity creep is the term used to describe the cumulative result of many small projects and productivity enhancements that enable a refinery to increase crude oil input over time.

Methanol from Petrochemical Feedstocks	0.010	0.010
High Sulfur Residual Fuel Oil	0.052	0.052
Low Sulfur Residual Fuel Oil	0.030	0.030
Asphalt	0.030	0.030
Petroleum Coke	0.051	0.051
	0.070	0.070

3.2 Biomass and Biofuels

3.2.1 Biomass supply curves

Biomass supply is represented with supply curves for twelve different feedstock types (e.g., crop and forest wastes, municipal solid waste, energy crops, animal fats and oils), all of which could be produced in California and/or the Western United States with some basic sustainability rules such as slope threshold (forest residue), maximum removal rate (agricultural residue), etc (Parker, Hart et al. 2010). The supply curves are assessed for every time period. Figure 3.4 shows the biomass supply curves in 2050. The supply curves are taken from Parker (2010), and the feedstocks include forest residues, municipal solid waste or MSW (Mixed⁵, paper, wood, and yard waste), orchard and vineyard waste, pulpwood, agricultural residues (stovers and straws), energy crops (herbaceous), yellow grease, animal tallow, and corn. The model also allows for imports of biofuels from outside the state, including ethanol (made from corn, cellulosic feedstock, grain and sugarcane), bio-diesel, and bio-based synthetic fuels (biogasoline, bio-derived residual fuel oil, bio-derived jet fuel, bio-derived aviation gasoline, bio-derived methanol, and bio-derived synthetic natural gas), produced outside of California and outside of the U.S.

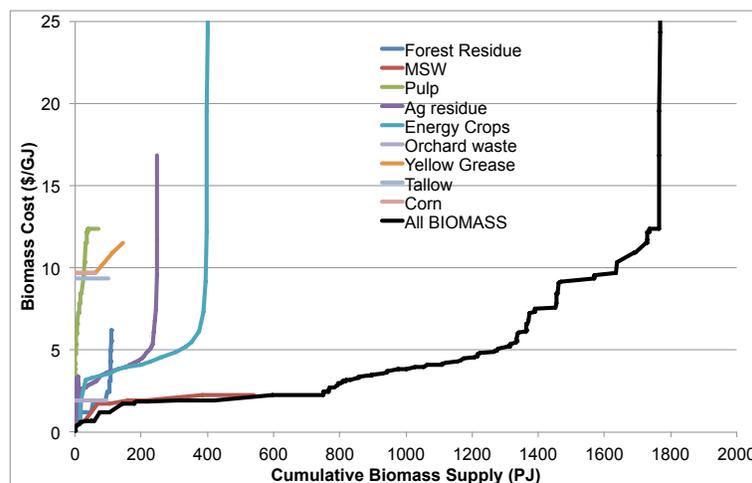


Figure 3.4. Biomass supply curves for California and neighboring states available for bioenergy purposes in California in 2050.

3.2.2 Biorefineries

Several different types of bio-refinery technologies are modeled in CA-TIMES (Table 3.2), though only ethanol and biodiesel are available in the base-year 2010: bio-diesel production facilities consuming yellow grease or animal tallow as feedstocks. Ethanol supply in 2010 is met by imports of corn ethanol from the Midwestern U.S. and sugarcane ethanol from Brazil. After 2010, the model is able to invest in cellulosic ethanol plants (via either the biochemical or thermochemical pathway) and bio-derived residual fuel oil plants (via a pyrolysis bio-oil pathway). These future technologies consume one of nine types of

⁵ Municipal Solid Waste (Mixed) includes the MSW (Dirty) and MSW (Food) categories from Nathan Parker’s dissertation work.

cellulosic feedstock. In addition to producing their liquid fuel products, these bio-refineries also generate a small amount of electricity as a by-product. Feeding this low-carbon electricity to the grid can displace more carbon-intensive sources of electricity, such as natural gas plants. All future bio-refinery technologies are characterized by biomass input efficiencies, investment costs, fixed and variable O&M costs, annual capacity factors, technology-specific hurdle rates, year-to-year limits on capacity growth, and a variety of other information. These technology characterizations largely come from a NREL study (Bainm 2007).

Table 3.2. Biorefineries and Fischer-Tropsch (FT) poly-generation plants in CA-TIMES

Production Technology	Feedstock Types
Cellulosic Ethanol Plants	
Biochemical Pathway (50 or 100 million gal per year) Thermochemical Pathway (50 or 100 MGY)	Forest Residues Municipal Solid Waste, Paper Municipal Solid Waste, Wood Municipal Solid Waste, Yard Orchard and Vineyard Waste Pulpwood Agricultural Residues, Stovers/Straws Energy Crops
Bio-Residual Fuel Oil Plants	
Pyrolysis Bio-Oil Pathway (25 or 100 MGY)	Forest Residues Municipal Solid Waste, Mixed Municipal Solid Waste, Paper Municipal Solid Waste, Wood Municipal Solid Waste, Yard Orchard and Vineyard Waste Pulpwood Agricultural Residues, Stovers/Straws Energy Crops
Renewable Bio-Diesel Plants	
Hydro-treatment Pathway (50 or 100 MGY)	Yellow Grease Animal Tallow
Fischer-Tropsch Poly-Generation Plants	
Biomass Gasification (61 MGY) Biomass Gasification, w/ CCS (61 MGY)	Forest Residues Municipal Solid Waste, Mixed Municipal Solid Waste, Paper Municipal Solid Waste, Wood Municipal Solid Waste, Yard Orchard and Vineyard Waste Pulpwood Agricultural Residues, Stovers/Straws Energy Crops
Coal-Biomass Gasification, Syngas RC, w/ CCS (138 MGY) Coal-Biomass Gasification, Syngas OT, w/ CCS (112 MGY) Coal-Biomass Gasification, Syngas OT, w/ CCS (506 MGY)	Coal Forest Residues Municipal Solid Waste, Mixed Municipal Solid Waste, Paper Municipal Solid Waste, Wood Municipal Solid Waste, Yard Orchard and Vineyard Waste Pulpwood Agricultural Residues, Stovers/Straws Energy Crops

Fischer-Tropsch (FT) coal-biomass poly-generation plants represent yet another category of potential future fuel conversion technologies in CA-TIMES (Table 3.2). These plants consume one of nine types of cellulosic feedstock and then produce some combination of synthetic gasoline, diesel, jet fuel, and/or electricity. Co-firing with coal is an option with certain plant designs. Based on Kreutz et al. (2008), we represent five unique biomass-to-liquid (BTL) and coal/biomass-to-liquid (CBTL) processes that are commercial or near-commercial technologies. The main differences between them have to do with their

varying sizes, biomass-to-coal input ratios, and fuel/electricity product splits; whether CCS is utilized or CO₂ is vented to the atmosphere; and whether a once through (OT) or recycle (RC) approach is used for the initially unconverted synthetic gas (“syngas”). (Note that RC systems maximize FT liquids production, while OT systems allow for more electricity generation at the expense of reduced FT liquids production.): BTL-RC-V, BTL-RC-CCS, CBTL-RC-CCS, CBTL-OT-CCS, CBTL2-OT-CCS. Two of the five plants made available to CA-TIMES consume only biomass (i.e., no coal co-firing); thus, they produce liquid fuel products with zero or significantly negative carbon intensities. For example, the BTL-RC-CCS plant design is an example of a negative emissions technology, since it takes carbon from biomass (which originally pulled CO₂ out of the atmosphere via photosynthesis) and permanently stores it underground (i.e. bioCCS). Further, because the three CBTL plants with coal-biomass co-firing each utilize CCS, they also produce liquid fuel products with relatively attractive carbon intensities, even though coal is used an input fuel. These carbon intensities are significantly better, or at least no worse, than petroleum-based gasoline. From a technological perspective, carbon capture and storage is particularly attractive with these FT liquids poly-generation plants because the CO₂ stream that is generated is naturally concentrated – in other words, a nearly pure stream of CO₂ is generated, by default, as a by-product of the FT process, thus the added costs of CO₂ capture are quite low. All future FT BTL/CBTL poly-generation plant technologies in CA-TIMES are characterized by coal and biomass input efficiencies, investment costs, fixed and variable O&M costs, annual capacity factors, technology-specific hurdle rates, year-to-year limits on capacity growth, and a variety of other information.

3.3 Hydrogen Production

A more detailed spatial representation illustrating how hydrogen infrastructure can build out over time to meeting regional demands has been developed as a standalone model described in detail in Section 7.1 but has not yet been incorporated into the main CA-TIMES model.

Hydrogen production, delivery and refueling infrastructure is represented relatively simply in the current iteration of CA-TIMES. Hydrogen can be supplied to the various end-use sectors in CA-TIMES via a number of different pathways. The following hydrogen production technologies are available to the model in future years: Central production via coal gasification (w/ and w/o CCS), natural gas steam methane reformation (w/ and w/o CCS), water electrolysis, and biomass gasification (w/ and w/o CCS). Distributed production methods can be accomplished at the station using natural gas steam reforming and water electrolysis. Biomass gasification to produce hydrogen can be coupled with CCS to provide a negative emissions technology. Figure 3.4 shows the potential technology options for hydrogen production.

The cost of central production facilities is based upon reference sizes for each type of infrastructure from DOE’s H2A database (H2A 2005).

All hydrogen production plants only produced hydrogen and it is assumed that no electricity co-generation takes place (though many infrastructure elements can consume electricity, especially water electrolysis). All future hydrogen production technologies in CA-TIMES are characterized by energy resource and/or water input efficiencies, investment costs, fixed and variable O&M costs. The technology and cost assumptions are based upon data primarily from DOE’s H2A database, though data from U.S. EPA’s 9-region MARKAL model (U.S. EPA 2008) is also used (for inputs like annual capacity factors, technology-specific hurdle rates, year-to-year limits on capacity growth, and a variety of other information).

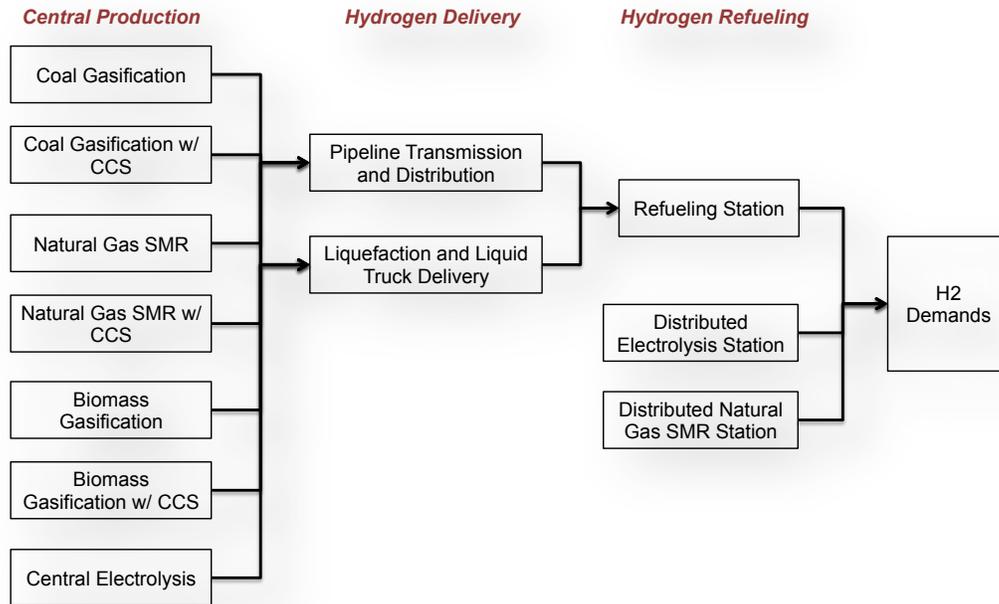


Figure 3.4. Simplified schematic of hydrogen production and supply technologies in CA-TIMES

After it is produced, hydrogen is distributed to end-use sector technologies by either pipeline or truck transmission and delivery technologies (see Figure 3.4). Distributed hydrogen production at the refueling station does not require any delivery technologies or associated costs. No spatial information is used in modeling of hydrogen delivery, instead an average distance is assumed for all central hydrogen production based upon average distances assumed in EPA’s MARKAL model.

Refueling station costs are based upon an assumed dispensing capacity of 2,740 kg/day. Each stage of hydrogen infrastructure, production, delivery and refueling have associated costs, energy inputs and emissions. These technology characterizations are based on the EPAUS9r MARKAL model U.S. EPA (2008), and the U.S. DOE’s Hydrogen Analysis (H2A) model (U.S. DOE 2008).

The representation of hydrogen infrastructure in CA-TIMES is a crude representation of how such a system would work. The two most important caveats include the lack of economies of scale in production and delivery infrastructure costs and the lack of spatial detail about hydrogen demand and delivery. These two issues are addressed in a separate analysis in Section 7.1, but have not yet been incorporated into the primary CA-TIMES model v1.5 and scenario analysis.

Without economies of scale represented in this model, costs for hydrogen production are represented as a cost per unit of capacity. This approach will underestimate the cost of building early infrastructure since systems to supply small amounts of hydrogen are invariably more expensive per unit of capacity than larger systems. This same issue comes up especially with respect to pipeline delivery as cost does not scale linearly with hydrogen flow rate (Yang and Ogden 2007). Also important is the fact that CA-TIMES v1.5 does not specify location of hydrogen demands, which has an important impact on the scale of delivery infrastructure. CA-TIMES v1.5 treats all demand as coming from one region and thus all demands use average delivery distances.

3.4 Electricity Generation

The electricity supply sector consists of power plants that take in primary energy feedstocks (e.g., natural gas, biomass, uranium, wind, hydro, coal) and convert it into electricity, which can then be delivered and

used to meet end-use energy service demands in the five end-use sectors (industrial, commercial, residential, agricultural, and transportation). Figure 3.6 shows a schematic representation of the electricity sector, including the resources, types of conversion plants, and electricity-using sectors.

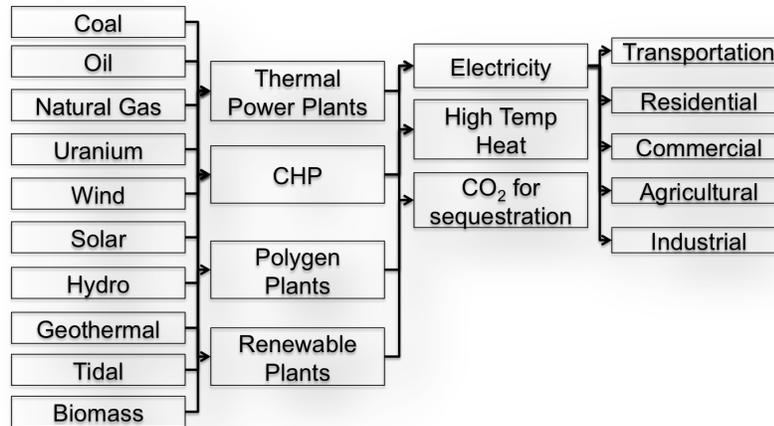


Figure 3.6. Schematic of electric sector resources, conversion plants and end use sectors.

The California electricity system is treated as one large demand with no spatial detail. This means that power from any generator can be used to meet demand from any load without any intrastate transmission constraints. The one exception to this aspatial representation is how intermittent renewables are treated (this is discussed later in section 3.4.3).

The majority of electricity supply in the state is produced in dedicated electricity plants (thermal or renewable plants), while a fraction of electricity is produced in plants that also produce other products, such as heat, chemicals or fuels.

The CA-TIMES model minimizes total system cost, which in the electricity sector reflects investments in power plant capacity, operations and maintenance of plants, and operation and fuel use decisions. The model accounts for the state’s existing stock of power plants in the base year, which is used to meet current and also near-term future demands. In order to meet the future demand for electricity (which is an endogenous decision in the model), the model chooses between available power plant technologies to invest in (i.e. capacity additions) and which power plants to operate (i.e. dispatch decisions), in order to match electricity supply and demand for each sub-annual timeslice, throughout the modeling period. CA-TIMES does not model individual power plants but tracks the capacity of power plants of different vintages (installation year) to account for differences in cost and/or efficiency.

The CA-TIMES model defines 19 power plant technologies to represent California’s current electricity generation stock, 11 different technologies representing electricity imports and 25 power plant technologies are specified and available for future investment.

The CA-TIMES model also captures the cost of investing in new electrical transmission lines for “stranded” renewable resources that exist in remote regions of the western U.S. and Canada (e.g., solar, wind, and geothermal), which could contribute to California’s electricity supply mix in the future (RETI 2009; CPUC 2011).

3.4.1 Timeslices

While not limited to the electricity sector, the use of timeslices is most relevant to the operation and dispatch of electricity supply and the demand for electricity from the end use sectors. In an annual modeling period, CA-TIMES is broken into 48 sub-annual timeslices. This is significantly lower than many electricity simulation models (which typically include hundreds to thousands of time periods) but more than other similar energy system models (often with 6 to 12). Each model year of CA-TIMES is divided up into six “seasons”, or pairs of months, while each seasonal period is subsequently partitioned into eight three-hour time blocks, resulting in 48 timeslices.

“Seasonal” division	“Hourly” division
1JF - January/February	T1: 0:00 – 3:00
2MA - March/April	T2: 3:00 – 6:00
3MJ - May/June	T3: 6:00 – 9:00
4JA - July/August	T4: 9:00 – 12:00
5SO - September/October	T5: 12:00 – 15:00
6ND - November/December	T6: 15:00 – 18:00
	T7: 18:00 – 21:00
	T8: 21:00 – 24:00

An appropriate way to think about this division is that there are 6 representative days in the year (one for each two-month period). And these average days are broken into 3-hour blocks so the first timeslice 1JFT1 represents the midnight to 3am hours on an average January and February day.

This level of temporal resolution offers the ability to track some (but certainly not all) of the important variability in supply and demand. Timing for electricity demands is specified for each end use sector (or energy service). On the supply side, the availability of electric generators is specified within each timeslice based upon historical averages (for thermal plants) and resource availability (for renewables) for plants and resources in California.

The model must balance supply and demand of electricity in each and every timeslice⁶. Thus, additional generation in timeslices when demand is low has lower value compared to generation during peak demand timeslices.

3.4.2 Power plants

Detailed information about the state’s electric sector is derived from (CBC 2009; McCarthy 2009; CARB 2010; CEC 2010; EIA 2011; CEC 2012). The list of technologies included in the model can be found in Table 3.3.

Table 3.3. Electric Generation Technologies in CA-TIMES

Base-Year Technologies	Future Technologies
Baseload Coal Steam Biomass Steam (Woody Biomass) Biomass Steam (Municipal Solid Waste) Biomass Steam (Herbaceous Biomass) Biogas from Landfills and Animal Waste Digesters Geothermal	Baseload Coal Steam Advanced Coal Int. Gasif. Combined-Cycle (IGCC) Advanced Coal Int. Gasif. Combined-Cycle (IGCC), w/ CCS Biomass IGCC (Woody Biomass) Biomass IGCC (Municipal Solid Waste) Biomass IGCC (Herbaceous Biomass)

⁶ It is possible to have excess generation in a timeslice, which is then essentially wasted.

California TIMES (CA-TIMES) Modeling of California Energy and Climate Policies (Draft Final Report for Review and Comments)

<p>Nuclear, Conventional Light Water Reactors (LWR) Load following Hydroelectric, Conventional (Baseload and Peaking) Hydroelectric, Reversible (Pumped Storage) Oil Steam (Distillate, Jet Fuel, and residual fuel oil, RFO) Diesel Oil Combustion Turbine Diesel Oil Combined-Cycle Natural Gas Combustion (Gas) Turbine (NGGT) Natural Gas Steam Turbine (NGST) Natural Gas Combined-Cycle (NGCC) Intermittent Wind Solar Thermal Solar Photovoltaic</p>	<p>Biogas from Landfills and Animal Waste Digesters Geothermal, in California Geothermal, in Western U.S. Outside California Nuclear, Conventional Light Water Reactors (LWR) Nuclear, Pebble-Bed Modular Reactor (PBMR) Nuclear, Gas Turbine - Modular Helium Reactor (GT-MHR) Load following Natural Gas Combustion (Gas) Turbine (NGGT) Advanced Natural Gas Combustion (Gas) Turbine (NGGT) Natural Gas Combined-Cycle (NGCC) Advanced Natural Gas Combined-Cycle (NGCC) Advanced Natural Gas Combined-Cycle (NGCC), w/CCS Hydroelectric, Conventional (Baseload and peaking) Hydroelectric, Reversible (Pumped Storage) Molten Carbonate Fuel Cell Intermittent Wind, Onshore – by CREZ Group Solar Thermal, - by CREZ Group Solar Photovoltaic (Utility) – by CREZ Group Solar Photovoltaic (Residential) Tidal and Ocean Energy</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

These power plant types can be broken into several categories based upon how they act within the model. The first are baseload thermal plants (e.g. nuclear, coal, biomass), which are run, more or less, at full capacity (~90%) in all sub-annual timeslices. These plants do not have the ability to be run at lower capacity factor. The second are load-following thermal plants (e.g. natural gas and fuel cell plants) that can vary their output on a timeslice basis. Because the model does not track individual power plants, but the overall capacity of specific types of power plants, the collective output from a given type of power plant can vary anywhere between 0% and maximum capacity (assumed to be 90%).

A third type is intermittent renewables (e.g. wind and solar plants) whose timeslice availability is an exogenous input to the model. Detailed analysis of historical and estimated solar and wind outputs for different locations in the Western US has been done using NREL System Advisor Model data, using data from NREL’s Solar Prospector and Western Wind Dataset (NREL 2013).

Hydro plants make up the last category of plants. Hydropower facilities are broken up into two types, conventional and pumped storage. Conventional hydropower in California consists of large dams and storage reservoirs. These are modeled as energy constrained resources, which have a certain quantity of energy generation over the course of the year and there is also seasonal variation in availability. We further break conventional hydropower into a baseload type, which has relatively constant generation (1/3 of total hydropower generation is assumed to run as a constant, baseload generator), and a peaking type, which is free to be dispatched up to hydropower capacity in order to meet demands as needed in any timeslice (2/3 of total hydropower is assumed to be available for load following). Figure 3.7 shows a historical generation duration curve for hydro for the last few years and hourly hydro generation is almost always over 1000 MW. This constant generation is represented by the baseload portion of hydro power plants whereas the variable hydro generation is represented by the peaking portion. Additionally, peaking hydro power generation is also constrained by season as water is more available in winter, spring and early summer and less available during late summer and fall months. Pumped storage hydro is an energy storage technology that is assumed to be around 80% efficient (because of evaporation, pump and turbine losses).

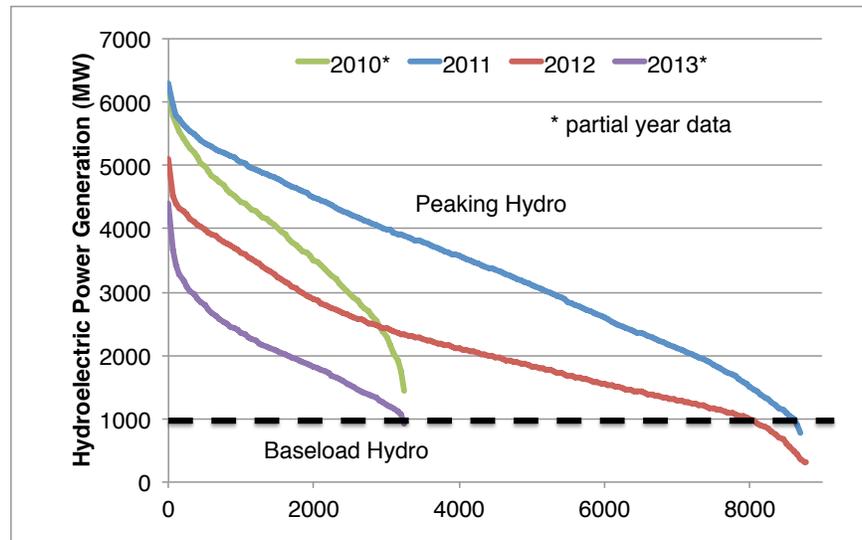


Figure 3.7. Load duration curve of historical large hydroelectric power generation in California. Data from CAISO (CAISO 2013).

Biomass plants are split into three types depending upon the type of biomass they can use (woody, herbaceous or municipal solid waste). Each of the nine types of biomass described in CA-TIMES falls into one of these categories and is assumed to be equivalent to another kind of biomass of the same type.

3.4.3 Renewable wind and solar resources and transmission

Since the introduction of the Renewable Portfolio Standard (RPS) policy, a number of studies have looked at how the state might meet the targets (CPUC 2009; RETI 2009; CPUC 2011). These studies identify wind and solar resources as the primary means of meeting the RPS, due to their relatively low cost and significant resource availability in California and in neighboring states. In addition, assessments of the location of these renewable resources and their availability have indicated that significant amounts of transmission capacity will need to be added in order to utilize these renewables (CPUC 2009; RETI 2009; WGA 2009).

The RETI project identified 59 Competitive Renewable Energy Zones (CREZ) that have significant renewable generation potential to contribute to meeting the demand in California (RETI) as well as identifying the transmission capacities and costs needed to connect these electricity sources to the California market. Data from Allan (2011) provided hourly profiles of potential wind and solar generation from each CREZ.

These 59 CREZs were aggregated to 23 CREZ groups (CGs) based upon shared use of representative transmission lines (RETI 2009) in order to reduce the modeling overhead. Each CG has potential wind and solar resources identified which has been mapped from the hourly profiles given by Allan (Allan 2011) to the 48 timeslices used in CA-TIMES.

The structure of remote renewable energy sources is shown in Figure 3.8.

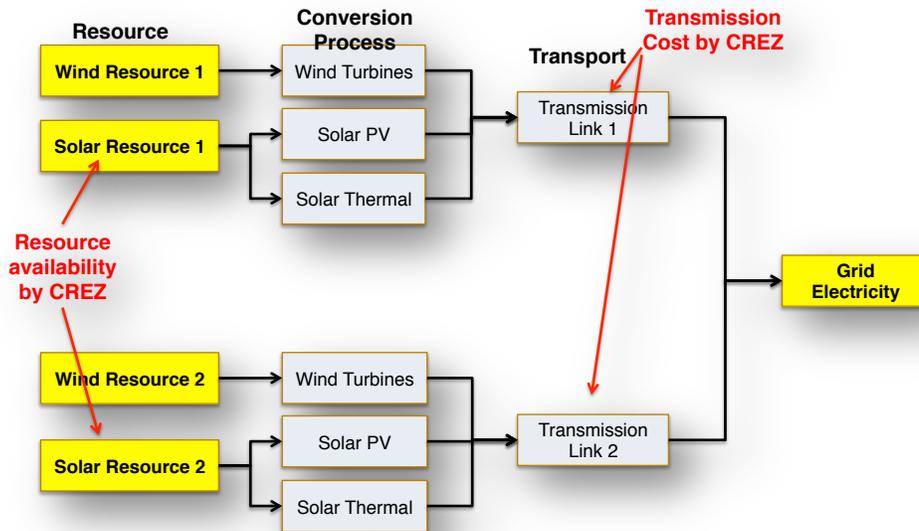


Figure 3.8. Structure of remote renewables for wind, solar PV and solar thermal power plants in Competitive Renewable Energy Zones (CREZ) groups

The first column (Resource) represents the availability of wind and solar resources in a given CG, which vary by the total resource availability (e.g. how much total energy is potentially available if wind or solar plants were built) and the timeslice availability (e.g. how much generation would be available in each timeslice). These vary depending upon the CG, which range from locations within California to many different Western States, British Columbia and Baja Mexico.

The next column represents the actual conversion facilities (wind turbine, solar thermal power plant, solar PV plant) that convert the wind and solar resources into electricity within the CG. Costs for wind turbines and solar plants are all based upon the same costs but can vary because regional cost multipliers are used. This remote electricity needs to be brought to the population centers via newly built transmission lines. The output of these transmission lines is then part of the pool of electricity that is available for use in the end-use sectors. As stated earlier, the model must balance supply and demand for electricity during each timeslice, and thus the fixed timeslice profile of generation for wind and solar is important. If these resources are to be used in large quantities, their generation profiles must match with the profile of demand. Flexible, load-following resources like hydro power and natural gas become quite important to make up for shortfalls.

Table 3.4. List of each CREZ group with solar and wind capacity, availability and transmission cost.

	<i>Primary CREZ</i>	<i>Solar Capacity (GW)</i>	<i>Solar Capacity Factor</i>	<i>Wind Capacity (GW)</i>	<i>Wind Capacity Factor</i>	<i>Transmission Cost (\$Mil)</i>	<i>Transmission Capital Cost per GW (\$Mil/GW)</i>	<i>Levelized* Transmission Capital Cost (\$/MWh)</i>
1	Lassen	-	-	2.01	0.30	22.28	11.09	0.64
2	Solano	-	-	0.89	0.19	6.11	6.84	0.63
3	Owens Valley	5.00	0.24	-	-	73.42	14.68	1.06
4	Inyokern/Tehachapi	17.33	0.27	4.39	0.34	127.93	5.89	0.36
5	Barstow	6.34	0.27	1.97	0.31	44.80	5.39	0.34
6	San Bern-Baker	4.13	0.26	0.18	0.26	31.40	7.29	0.48
7	Iron Mountain	6.61	0.27	0.06	0.19	96.41	14.46	0.94
8	Palm Springs	-	-	0.33	0.31	2.58	7.77	0.43
9	Riverside E	10.55	0.27	-	-	87.52	8.30	0.53
10	Imperial	5.07	0.27	0.12	0.23	87.90	16.94	1.11
11	San Diego	-	-	0.88	0.29	10.51	11.96	0.71
12	Carrizo	5.00	0.24	0.43	0.26	25.21	4.64	0.34
13	Westlands	5.00	0.20	-	-	23.20	4.64	0.40
14	Arizona	19.78	0.27	3.71	0.28	2,048.65	87.19	5.56
15	British Columbia	-	-	13.94	0.28	24,176.81	1,734.14	107.97
16	Baja	-	-	8.31	0.30	764.05	92.00	5.35
17	Idaho	-	-	1.65	0.30	2,498.42	1,514.97	87.86
18	New Mexico	-	-	13.19	0.39	3,624.10	274.84	12.22
19	Nevada	18.59	0.23	1.75	0.30	2,429.09	119.42	8.67
20	Oregon	-	-	2.91	0.27	2,045.36	702.17	44.67
21	Utah	-	-	1.68	0.30	562.65	335.16	19.40
22	Washington	-	-	3.26	0.28	1,075.19	329.59	20.67
23	Wyoming	-	-	14.85	0.34	7,923.31	533.44	26.89

* Assumes 15% CRF - Source: RETI / A. Allan Thesis

Cost multipliers are used to estimate the cost of building wind and solar facilities in different regions (See Appendix A. The cost of electricity will vary between these different regions, because of these capital cost differences as well as the difference in resource availability, plant capacity factor and transmission cost and capacity. The value of electricity from these regions will also vary depending upon the timeslice profile of generation.

3.4.4 New power plant costs and efficiency

Table 3.5 shows the input capital cost and efficiency assumptions for CA-TIMES electricity sector power plants. Costs and efficiencies are shown for specific years and the values for other years are interpolated from the values displayed. This data comes primarily from AEO2012 (EIA 2012) and the SWITCH model (Nelson, Johnston et al. 2012). Costs and efficiencies are interpolated between data years.

Transmission lines for renewable generation in remote CREZ regions are assumed to have a 5% loss and costs for these lines is shown in Table 3.5. A comparison of our cost assumptions with the other studies is summarized in Appendix A.

Table 3.5. Capital investment and plant efficiency assumptions for new power plants

California TIMES (CA-TIMES) Modeling of California Energy and Climate Policies (Draft Final Report for Review and Comments)

Electric Power Plant Cost and Efficiency	Plant Capital Investment Cost (\$2010/kW)				Power Plant Efficiency (%)					
	2010	2015	2035	2050	2010	2035	2050			
Biogas from landfills and animal waste digesters	8727	8727	8727	8727	25.0%	25.0%	25.0%			
Biomass IGCC, Herbaceous (Energy Crop and Ag residue)	4168	3868	2871	2871	34.1%	37.9%	37.9%			
Biomass IGCC, MSW (Mixed, Paper and Yard MSW)	4168	3868	2871	2871	34.1%	37.9%	37.9%			
Biomass IGCC, Woody (Forest, Wood MSW, Orchard, Pulp)	4168	3868	2871	2871	34.1%	37.9%	37.9%			
Coal Steam	2844	2985	2115	2115	38.8%	39.0%	39.0%			
Advanced Coal Int. Gas. Combined-Cycle (IGCC)	3220	3366	2281	2281	39.2%	45.8%	45.8%			
Advanced Coal IGCC w/CCS	5990	6232	4101	4101	31.9%	41.1%	41.1%			
Natural Gas Combustion (Gas) Turbine (NGGT)	1208	980	538	538	31.8%	32.7%	32.7%			
Advanced Natural Gas Combustion (Gas) Turbine (NGGT)	859	897	582	582	35.0%	39.9%	39.9%			
Natural Gas Combined-Cycle (NGCC)	1221	1283	909	909	48.4%	50.2%	50.2%			
Advanced Natural Gas Combined-Cycle (NGCC)	1244	1302	875	875	53.1%	53.9%	53.9%			
Advanced Natural Gas Combined-Cycle (NGCC) w/CCS	2369	2462	1590	1590	45.3%	45.5%	45.5%			
Molten Carbonate Fuel Cell (Natural Gas)	7041	4158	2129	2129	35.9%	49.0%	49.0%			
Hydroelectric, Conventional	2347	2347	2347	2347	Renewable resources are characterized by their potential electricity generation so renewable power plants are generally assumed to have an efficiency of 100%					
Hydroelectric, Reversible (Pumped Storage)	2347	2347	2347	2347						
Geothermal	2513	2390	1955	1955						
Solar Photovoltaic (Residential)	5710	4453	2113	2113						
Tidal and Ocean Energy	7333	6723	4283	3333						
Wind Turbines (a)	2729	2662	2408	2408						
Solar Thermal Plant (a)	5301	5069	4239	4239						
Solar Photovoltaic Plant (a)	5373	4052	1895	1895						
Electricity Transmission from remote CREZ	Cost depends on distance and capacity							95.0%	95.0%	95.0%
Nuclear, Light Water Reactor (LWR)	5335	5466	3414	3414				1.53 PJ/tEU (b)		
Nuclear, Pebble-Bed Modular Reactor (PBMR)	4631	4745	2964	2964	2.76 PJ/tEU (b)					
Nuclear, Gas Turbine - Modular Helium Reactor (GT-MHR)	4157	4259	2660	2660	4.65 PJ/tEU (b)					

Notes: ^a Wind and solar plants in different CREZ zones have different transmission cost, capacity factor and hourly generation pattern
^b Nuclear plants have efficiencies specified in units of PJ of electricity generated per tonne of input enriched uranium (PJ/tEU)

3.4.5 Electricity imports

A large share of California’s electricity is actually supplied from outside the state (~30% in 2010) and is categorized into two different types of imports: firm and system. Firm imports refer to generation from power plants located outside of California but owned by in-state utilities. System imports, on the other hand, refer to electricity produced by utilities outside the state that is only imported when available or needed – purchased on the spot market for electricity.

This imported electricity is generated primarily from natural gas, hydropower and coal plants. And as required by AB32, the energy use and emissions related to electricity imports are included in CARB’s official GHG Inventory (CARB 2009). Thus, within CA-TIMES, emissions and energy usage from electricity imports area counted in instate combustion emissions.

A key question for CA-TIMES which models electricity generation out to 2050 is what is the cost, resource composition and emissions from electricity imports in the future? Because of the difficulty in answering this complex question, a simplifying assumption is made: imports are essentially phased out and future generation comes from “in-state” sources. In the CA-TIMES model, firm and system imports are assumed to decline to zero from 2010 to 2025.

Given the structure of the CA-TIMES model, it is preferable to represent all new electricity supply to California at the technology level (i.e., with investment cost, efficiency, and availability data), rather than as commodity flows; hence, future supplies of imports are subsumed as part of the mix of power plant technologies that the model chooses to build and deploy to meet California electricity demand. In other words, even though some of the power might be produced out of state it is assumed that it is built to serve CA demands. The result is similar to, and thus modeled as if, all electricity generation post-2025 comes from instate generation. Note that electricity imports are also subject to the Renewable Portfolio Standard and emissions targets within the framework of CA-TIMES.

3.5 Greenhouse Gas (GHG) Emissions

Two categories of emissions are differentiated in the CA-TIMES modeling framework. The first category, *Instate CA Energy emissions*, includes all GHGs produced from fuel conversion and processing (e.g. refinery emissions, biofuel or H₂ production plant emissions), transport and delivery, and combustion activities within the boundaries of California's energy system. As stated previously, **in this analysis California energy system is defined to also include emissions from all interstate and international aviation and marine trips whose origin is California and from all power plants whose electricity is destined for the California market, even if those plants are located in neighboring states.**

The second category, *Lifecycle CA Energy emissions*, includes additional emissions sources such as emissions that result from transporting primary energy feedstocks (e.g., crude oil, natural gas, coal, uranium, biomass) or finished fuels (e.g., refined petroleum products, biofuels) from outside of the state into California as well as the upstream lifecycle ("well-to-tank") emissions resulting from production/conversion of these feedstocks/fuels outside of California. California imports more energy than any other US state (approximately 67% in 2009) (EIA 2013); hence, the Instate CA Energy emissions category, like traditional statewide emissions assessments, excludes a substantial portion of emissions related to the state's energy usage.

It is important to note that the two categories described above do not correspond exactly to how emissions are tracked in the CARB GHG Inventory for the purposes of meeting California's current climate change law for 2020 (AB32). While combustion emissions associated with imported electricity are included in the Inventory, those from interstate and international aviation and marine activities are specifically excluded from the Inventory (although they are still estimated and reported in official estimates). **This difference, while subtle, is actually quite important, and not just for accounting reasons: from a strategic perspective, incorporating California's trans-boundary transportation emissions in any future (i.e., post-2020) carbon cap will increase the difficulty of meeting the state's emission reduction targets. This is especially true because these two transportation categories are more difficult to decarbonize than other sectors given their reliance on petroleum fuels.**

4. DEMAND SECTORS

CA-TIMES has five end-use sectors: transportation, residential, commercial, industrial, and agricultural and non-energy sectors. Each sector is represented with various degree of details, with the most detailed representation of transportation, followed by commercial and residential sectors, and simplified representation of industrial, agricultural and non-energy sector. They are detailed in detail in sections below.

4.1 Transportation

The transportation sector is the leading emitter contributing 45% of total emissions (CARB 2013)(Figure 1.2) (35% comes from in-state emissions, while the other 10% comes from domestic and international aviation and international marine bunker fuel use). Therefore, in order to reach any emissions target, a detailed analysis of the different modes of transportation sector is necessary. The current version of the CA-TIMES model consists of detailed end-use representation in vehicle-miles traveled, for the different sub-sectors in transportation, such as, light-duty cars, light-duty trucks, medium duty vehicles, heavy-duty vehicles, buses, trains, marine vessels, and aircrafts. The sub-sectors have a multiple vehicle technology running on different fuels represented, ranging from gasoline vehicles to fuel efficient and advanced vehicle technologies, such as battery electric, plug-in hybrid and fuel cell vehicles. The assumptions for each end-use demand are briefly described below and detailed assumptions of technology costs and efficiencies are included in Appendix B.

The structure of the transportation sector in the current CA-TIMES model remains the same as the CA-TIMES v1.0 model (McCollum, Yang et al. 2012). The base year data and demand trajectory for the business-as-usual scenario are updated for most of the modes in the transportation sectors, wherever the data was available. In the cases where the updated data was not available, we directly extrapolate data from the CA-TIMES v1.0 model. The source data for all the modes are described in detail in the following subsections.

4.1.1 Light-duty cars and trucks

The vehicle miles traveled (VMT) projections for the light-duty sector come from the EMFAC 2011 (CARB 2011) model developed by California Air Resources Board. The VMT data projections for the light-duty cars come from the LDA (passenger car) category, and the data for the light-duty trucks are represented from the combined categories of LDT1 (Light-Duty Trucks, 0-3750 lbs), LDT2 (Light-Duty Trucks, 3751-5750 lbs) and MDV (Medium-Duty Trucks, 5751-8500 lbs) categories. EMFAC model projects the VMT data until the year 2035, the values are then linearly extrapolated from the trajectory till the year 2050. The vehicle stock for the base year 2010, for the gasoline and diesel vehicles is taken from the EMFAC model. For the hybrid and electric vehicle stock, the California DMV data facts for the year 2010 are used. It is assumed that, in the base year (2010), 90% of the registered hybrid vehicles in California are light-duty cars, and the rest are assumed to be light-duty trucks. All the electric vehicles registered according to the DMV data in the base year are assumed to be light-duty cars, as the share of the light-duty trucks might be too small to be represented compared to other base year vehicle technologies, so they are ignored. The miles traveled per vehicle for the base year are also calculated from the EMFAC model.

Figure 4.1 shows the VMT data based on EMFAC model data and our extrapolation for light-duty cars and light-duty trucks.

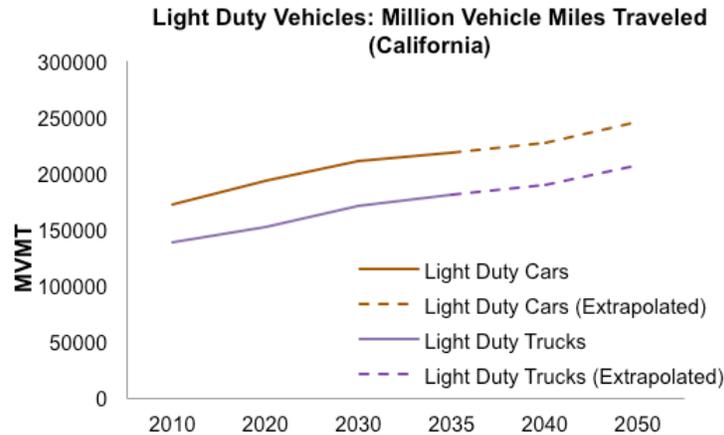


Figure 4. 1. Vehicle miles traveled demand of light-duty cars and trucks.

The projections of costs and efficiencies for the new vehicle technologies are mostly obtained from AEO 2013 Reference case values (U.S. EIA 2013) modified based on our expert judgment based on the review of our assumptions in the literature (see Appendix B). The costs were converted to 2010 dollars. For the vehicle technologies that were not present in the AEO case, the costs were taken from the CA-TIMES v1.0 model, and were converted to 2010 dollar values. These assumptions are detailed in Appendix B.

4.1.2 Motorcycles

The VMT data projections for motorcycles are taken from the EMFAC model from the MCY (Motorcycle) category. The stock of motorcycles for the base year is taken from the California DMV data. The miles traveled per motorcycle are calculated from the EMFAC model (Figure 4.2). The costs and efficiency values were retained the same as the CA-TIMES v1.0 model, except that the costs were converted to 2010 dollars. These assumptions are detailed in Appendix B.

4.1.3 Medium-duty vehicles and heavy-duty vehicles

The VMT projections for medium-duty vehicles are taken from the EMFAC model for the combined categories of:

- a) LHDT1 (Light-Heavy-Duty Trucks, 8501-10000 lbs)
- b) LHDT2 (Light-Heavy-Duty Trucks, 10001-14000 lbs)
- c) All the T6 category vehicles that are under 26,000 lbs

The VMT projections for heavy-duty vehicles are taken from the EMFAC model for the combined categories of T6 (>26,000 lbs), T7 or above vehicle categories (Figure 4.2). The vehicle stock numbers for gasoline and diesel technologies for the base year are taken from the EMFAC model. The miles traveled per vehicle for each vehicle technology are also calculated from the EMFAC data. The cost and efficiency values are assumed from the International Energy Agency's Energy Technology Perspectives report (IEA, 2008), and the dollars values are converted to the year 2010.

4.1.4 Buses

Three categories of buses are represented in the CA-TIMES model: Transit bus, School bus, Intercity & other buses. The transit bus VMT data projections are taken from the EMFAC model's UBUS (urban bus) category, school bus VMT data projections are taken from the EMFAC model's SBUS (school bus)

category, and the Intercity & other bus VMT data projections are taken from the EMFAC model's OBUS (Other bus) category (Figure 4.2).

The stock of gasoline buses for all the three categories are taken from the EMFAC model, along with the calculation of miles traveled per gasoline bus. The stock of diesel, hybrid and electric buses for transit buses are calculated from National Transit Database from their energy consumption shares among the total number of operating buses. The diesel stock for the intercity buses is assumed the same as the CA-TIMES v1.0. The costs and efficiencies of these buses are also taken from the CA-TIMES v1.0 model, and the investment costs of buses are converted to 2010 dollars. These assumptions are detailed in Appendix B.

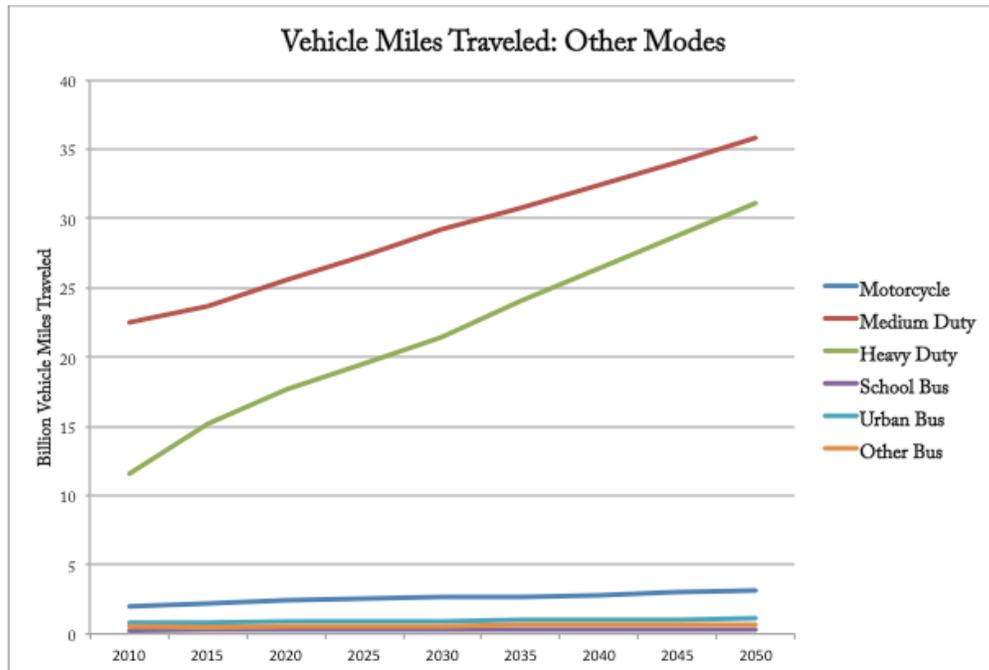


Figure 4.2. Vehicle-miles travelled data for modes other than light-duty sector vehicles

4.1.5 Passenger rail

Four categories of passenger rail are represented in the CA-TIMES model: Commuter rail, heavy rail, light rail and intercity rail. The end-use demand for these categories is represented in passenger miles traveled. The train-miles traveled are obtained from the National Transit Database for the year 2010 (NTD, 2010) for the commuter rail, heavy rail and light rail categories. The cable car data is included in the light rail category. The intercity passenger miles are calculated from National Transit Database and Amtrak passenger boardings for the state of California in the year 2010. The train-miles for intercity trains are calculated from the load factor and passenger-miles data.

The load or occupancy factors for passenger rail (passengers/vehicle and vehicles/train) are assumed to be the same as the CA-TIMES v1.0 model which were calculated from National Transit Database (NTD, 2005). The load factor (passengers/vehicle) for intercity trains is updated from Amtrak database for the year 2010 (Amtrak 2010).

The stock of trains per fuel type for these categories were obtained from National Transit Database (NTD, 2010). The train-miles traveled per train per year are calculated based on the above data (train-miles and stock) in the model. The costs and efficiencies of these trains are taken from the CA-TIMES v1.0 model,

and the investment costs of trains are converted to 2010 dollars. These assumptions are detailed in Appendix B.

4.1.6 Domestic freight (air, rail and shipping)

Both interstate and intrastate freight data for the three major modes: air, rail and shipping are obtained from Oak Ridge National laboratory's FAF3 (Freight Analysis Framework Version 3) model database (ORNL 2013). The end-use demand data are represented in million-ton-miles traveled (MTMT). The FAF3 model has the domestic (national) freight data, also has the capability to obtain the state-specific data: from, to and within the given data. Also, all the freight data includes domestic, import and exports for the state. The freight data 'within' California are considered as intrastate, and freight data 'from' and 'to' California are considered as interstate. The freight rail data has combined interstate and intrastate ton-miles.

The ton-miles traveled are projected till the year 2040; the data for the later years are linearly extrapolated till 2050. The vehicle configuration data for the freight rail (vehicles/train) and load factor (tons/cars) were calculated in the CA-TIMES v1.0 model from the ton-miles, vehicle miles and train miles data, determined from BTS (2005) calculations. The ton-miles are updated from the FAF3 data (ORNL 2013), but the database does not have the updated vehicle miles and train miles data. So, the vehicle configuration (vehicles/train) and load factor for the freight rail (tons/cars) was assumed to be the same as the CA-TIMES v1.0 model.

Stock for the freight rail cars were calculated based on the load factor and FAF3 model's kilotonne by mode. The stock for the marine shipping vessels were calculated from the waterborne tonnage data from US Army Corps of Engineers (USACE, 2007). The stock of freight airline data was assumed to be the same as the CA-TIMES v1.0 model, which was obtained from California Air Resources Board (CARB, 2008). The costs and efficiencies of these freight modes are also taken from the CA-TIMES v1.0 model, which was obtained from ETP report (IEA, 2008); and the investment costs are converted to 2010 dollars.

4.1.7 Domestic (interstate and intrastate) passenger aviation

The passenger aviation data within California, and to and from California were obtained from the Bureau of Transportation Statistics aviation (BTS 2010) database. The BTS data contains the number of passengers boarded in each flight, and the distance category of each flight (specified in 500 mile divisions). The total number of passenger miles traveled for the year 2010 is calculated and calibrated based on the 2005 data. Since the distance categories are separated by 500 mile divisions, it is harder to gauge the exact passenger-miles traveled. By comparing the similar data for the year 2005, it is calculated that the passenger miles traveled is about 70% of the total number of passenger miles obtained from the BTS data calculations with 500 mile intervals. The same percentage value is used to determine the 2010 data. The stock values for passenger aviation are obtained from California Air Resources Board (CARB 2008). Investment costs are obtained from Boeing (2007); and efficiencies for the passenger aviation airlines are calculated from the airplane energy intensity data from Bureau of Transportation Statistics (BTS 2010).

4.1.8 Natural gas pipelines

The pipeline consumption of natural gas in the state of California is updated for the year 2010 (EIA 2010). The pipeline efficiency for the base year was also updated from the EIA data.

4.1.9 Other transportation

The following end-use data demand sectors were extrapolated from the CA-TIMES v1.0 model. For this revised version of the model, the extrapolated 2010 data was used as a baseline. The stock, cost and

efficiencies are retained from the previous model version. The data sources for these sectors are listed in Table 4.1:

- International freight data (air, rail and shipping)
- Harbor craft
- Personal recreation boats
- General aviation
- International passenger aviation
- International shipping
- Off-road and construction
- Agriculture

Table 4.1 summarizes transportation technology subcategories, units for end-use demand, and data sources for demand and technology assumptions.

Table 4. 1. Summary of data sources for transportation demand and technology by subcategory.

Sub-category	Demand Unit	Demand data	Technology data
Light-duty cars and trucks	MVMT	EMFAC (2011) to 2035 and linearly extrapolated to 2050	AEO 2013 and ARB ZEV Regulation
Motorcycles	MVMT	EMFAC (2011) to 2035 and linearly extrapolated to 2050	CEC IEPR and Caltrans MVSTAFF
Medium-duty vehicles and Heavy-duty vehicles	MVMT	EMFAC (2011) to 2035 and linearly extrapolated to 2050	Energy Technology Perspectives report (IEA, 2008)
Buses	MVMT	EMFAC (2011) to 2035 and linearly extrapolated to 2050	Various sources (See Appendix B).
Passenger rail	MPMT	National Transit Database (2005)	US Environmental Protection Agency (2006)
International Shipping	Million Vessel miles	CARB’s Oceangoing ship survey (2005)	Energy Technology Perspectives report (IEA, 2008)
Domestic freight (air, rail and shipping)	MTMT	Oak Ridge National laboratory’s FAF3 (Freight Analysis Framework Version 3) to 2040 and linearly extrapolated to 2050	Energy Technology Perspectives report (IEA, 2008)
Domestic (interstate and intrastate) passenger aviation	MPMT	Bureau of Transportation Statistics: Aviation (2010)	Boeing (2007)
International passenger aviation	MPMT	California Air Resources Board (2008).	Boeing (2007)
International freight aviation	MTMT	California Air Resources Board (2008).	Energy Technology Perspectives report (IEA, 2008)
General aviation	Million hours	FAA (2007)	FAA (2007)
Harbor Craft and Recreational boats	Million hours	CARB’s Harbor Craft survey (2004) and OFFROAD model (2007)	
Off-road and construction vehicles	Million hours	CARB’s OFFROAD model (2007).	CARB’s OFFROAD model (2007).
Agricultural vehicles	Million hours		
Natural gas pipeline	PJ	EIA (2010)	This transport subsector is treated differently from the other subsectors since there is no stock or annual average activity.

MVMT: Million Vehicle miles travelled; MPMT: Million passenger miles traveled; MTMT: Million-ton-miles traveled

4.2 Residential End Use Sector

The building sector is a large consumer of energy, it currently consumes about 40% of final energy in the US (EIA 2011); and it contributes to 13% of CO₂ emissions from fossil fuel combustion directly in California (not accounting emissions from electricity use) (Figure 1.2). The building sector generally includes commercial and residential sectors; in CA-TIMES model we address commercial and residential sectors separately. In this section we describe the residential sector demand and in the section 4.3 the commercial sector will be explained. Most other models have treated these two sectors either exogenously (assumed energy use and GHG emissions follow historical trends) or ignore economic interactions (such as efficiency improvement vs. demand response to fuel prices). Given the assumed drastic technology/efficiency improvements in buildings to meet the statewide 80% GHG emission reduction goal by 2050, it is important to understand the trend of energy consumption and the potential effects of climate policies on this sector.

California has always had a leading role in adopting efficiency standards and building codes in the United States and even in the world since the 1970s. Many believe that these standards have had a significant effect in reducing energy consumption in California. For instance, Geller et al. (2006) indicated that efficiency standards and codes cut electricity use by about 7% of statewide electricity consumption as of 2000. California residential energy consumption per capita and per household have been on decreasing trends since 1980, and are significantly lower compared with other states (Bernstein, Lempert et al. 2000). These efficiency improvements resulted in a variety of economic benefits, including lower household spending on energy and higher GDP growth (Bernstein, Lempert et al. 2000). Using the of CA-TIMES model, we can study the effects of different policies including sector-specific policies such as building efficiency standards and economy-wide carbon policies and how they affect the future energy use and technological adoption in these two sectors.

The residential sector in CA-TIMES model is broken into ten service demands, including space heating, space cooling, water heating, lighting, cooking, refrigeration, clothes washing, clothes drying, dish washing, freezing, and miscellaneous. An increasing share of residential electricity demand is “unexplained” usage, i.e. computers and electronics such as laptops, DVRs, cell phone, etc. Due to the lack of data, these service demands are categorized under “miscellaneous.” Service demands for space heating, space cooling, water heating and lighting are calculated separately for single-family and multi-family houses. These service demands are provided by a wide range of end-use technologies such as central air conditioner (AC), incandescent light bulbs, natural gas heaters, etc. These end-use technologies use a variety of fuels including electricity, natural gas, liquid petroleum gas (LPG), solar, and woody biomass. The schematic diagram of residential sector is shown in Figure 4.3.

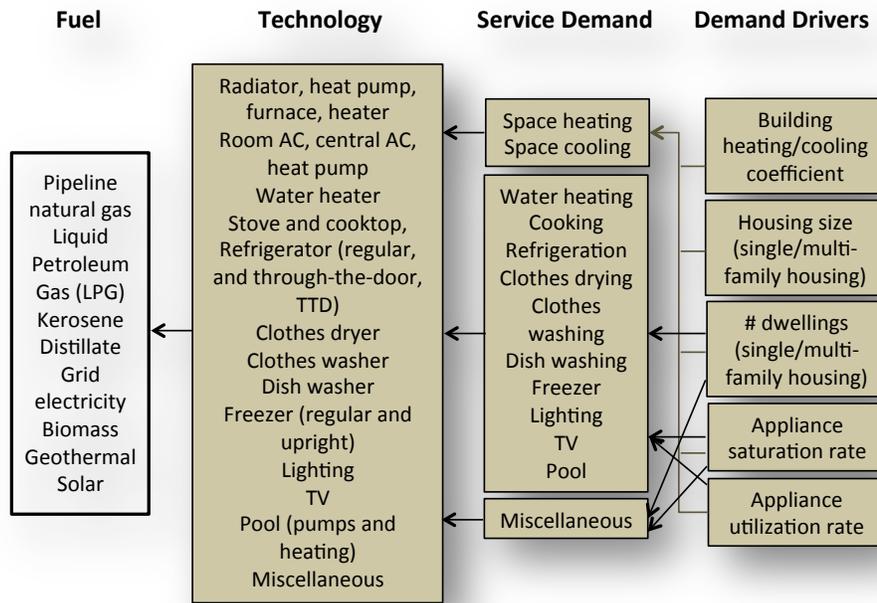


Figure 4. 3. The structure of energy demand and supply of CA-TIMES residential sector

We first calibrate end-use service demand to the base year (2010), then project the service demand up to 2050 based on a few socio-economic drivers. By specifying energy service demands (e.g. heated space, cooled space, lighted space, heated water, etc.) for the base year and how they change over time based on drivers such as population growth and housing sizes, we exogenously specify fixed service demand changes over time. These drivers include the projected increase in housing unit size, number of dwelling, utilization rate, appliance saturation rates, and housing stock heating/cooling coefficient.

The model endogenously optimizes investment in end-use technologies based on economic factors (including technology costs and fuel prices), consumer choices (technology-specific discount rates and service demand changes in response to prices if running with elastic demand), technology availability, and policy constraints and calculates total statewide residential technology adoption and energy uses over time. The final energy demand (energy consumption) is determined by model endogenously by selecting different end-use technologies and their fuel input and efficiency assumptions. The model selects the end-use technologies to satisfy energy service demand while minimizing the total system cost (not just sector specific costs) and satisfying user-defined constraints such as technology or building efficiency standard, economy-wide or sectorial-specific GHG emission target, incentives (e.g. subsidies or rebates), etc.

End-use service demands (ES) of residential sector are calculated based on the following equation in our model:

$$ES_{u,t} = \sum_D \sum_t N_{i,u,D,t} \times UE_{i,u,D,t} \times Eff_{i,u,D,t} \quad (\text{Equation 4.1})$$

Where,

- $ES_{u,t}$ Energy service demand u at time t (PJ *delivered*/year or PJ of useful energy per year)
- $N_{i,u,D,t}$ Stock of technology i for energy service demand u for dwelling type D at time t (number of units)
- $UE_{i,u,D,t}$ Fuel use of technology i for energy service demand u for dwelling type D at time t (PJ *consumed*/unit/year or PJ of final energy per unit per year)

$$Eff_{i,u,D,t} \text{ Energy efficiency of technology } i \text{ for energy service demand } u \text{ for dwelling type } D \text{ at time } t \text{ (PJ}_{delivered}/\text{PJ}_{consumed}).$$

The projections for all of service demands are based on Equation 4.2 except space heating and cooling are calculated based on Equation 4.3.

$$ES_{u, 2050} = ES_{u, 2010} \times (1 + \Delta \# \text{ of Dwellings}) \times (1 + \Delta \text{Saturation rate}) \times (1 + \Delta \text{utilization rate}) \quad (\text{Equation 4.2})$$

$$ES_{u, 2050} = ES_{u, 2010} \times (1 + \Delta \# \text{ of Dwellings}) \times (1 + \Delta \text{Saturation rate}) \times (1 + \Delta \text{utilization rate}) \times (1 + \Delta \text{Housing heating / cooling coefficient}) \quad (\text{Equation 4.3})$$

Where Δ represents the percent change between 2010 and 2050.

Residential energy service demand, fuel use, and technology are summarized in Table 4.2 below.

Table 4.2. Characteristics of residential sector: fuel use, technology, service demand and demand drivers.

Fuel	Technology	Service Demand	Temporal Resolution	Demand Drivers
Electricity, natural gas, LPG, wood, geothermal	Radiator, heat pump, furnace, heaters	Space heating	Bi-monthly	Number of dwelling units (population), housing size, building heating/cooling coefficient, appliance saturation rate, appliance utilization rate
Electricity, natural gas, geothermal	Room AC, central AC, heat pump	Space cooling	Time of day and bi monthly (8 time slices each day for every two months)	
Electricity, natural gas, LPG, solar	Water heater	Water heating	Annual	Number of dwelling units (population), appliance saturation rate, appliance utilization rate
Electricity, natural gas, LPG	Stove and cooktop	Cooking	Annual	
Electricity	Refrigerator	Refrigeration	Annual	
Electricity, natural gas	Clothes washer	Clothes washing	Annual	
Electricity, natural gas	Clothes dryer	Clothes drying	Annual	
Electricity, natural gas	Dish washer	Dish washing	Annual	
Electricity	Freezer (regular and upright)	Freezers	Annual	
Electricity	TV	TV	Annual	
Electricity, solar thermal	Pool (pumps and heating)	Pool	Annual*	
Electricity	Light bulbs	Lighting	Time of day and seasonal(8 time slices each day for every two months)	
Electricity, natural gas	Dummy technology	Misc.	Annual	Number of dwelling units (population),

* Even though pool energy demand should be modeled seasonally, we ignore the time slice of this demand to simplify the model since the demand is small.

As shown in Table 4.2, the temporal resolution of the service demands varies. Space heating is defined with bi-monthly resolution, while space cooling and lighting resolutions are defined with 3-hour intervals

(8 time slices per day), and every two-month (6 time slices per year). The rest of service demands have annual resolutions.

4.2.1 End-use demand drivers

This section describes residential demand drivers and their projection to the year 2050.

4.2.1.1 Population, number of dwellings and housing unit size

We use the population projection from California Department of Finance (CADO) (California Department of Finance 2013) and the number of dwelling units from the census data (http://quickfacts.census.gov/qfd/download_data.html). We assume the same population growth rate in single family and multi-family households and project the total number of single and multi-family households in California. Mobile homes are included in the single households. The total single family and multifamily dwellings are estimated to grow from 9.4 million and 4.2 million dwellings to 13 million and 5.3 million dwellings in 2050, respectively. The share of single and multi-family households in 2010 is 69.2% and 30.8% and it is estimated to increase slightly to 70.8% and 29.2% in 2050. The detailed data is shown in Table 4.3.

Table 4.3. Number of dwelling units and housing unit size, 2010 - 2050

	Number of Dwelling Units			Housing Unit Size (sq ft)		
	2010 (1000s)	2050 (1000s)	Growth (%)	2010 (1000s)	2050 (1000s)	Growth (%)
Single-family housing (SFH)	9,467 (69.2%)	13,073 (70.8%)	38%	2,100	2,753	31%
Multi-family housing (MFH)	4,213 (30.8%)	5,390 (29.2%)	28%	843	1033	23%
Total	13,680	18,212	35%			

Based on EIA’s 2009 Residential Energy Consumption Survey (RECS) Housing Characteristics Tables (Table HC10.15), the average square feet per housing unit in the West region in 2009 were 2,100 sq ft and 843 sq ft for single-family homes (SFH) and multifamily homes (MFH), respectively (EIA 2013). The average sizes for both housing types have increased substantially over the years, 34.6% and 13% increase for SFH and MFH, respectively, when comparing houses constructed in the 1970s versus houses constructed in 2000s (EIA 2013). The annual average growth rates are 0.68% for SFH and 0.51% for MFH. Over the period of 40 years, we linearly extrapolate that the housing size will increase 31% and 23% for SFH and MFH, respectively.

4.2.1.2 Housing heating and cooling coefficients

The housing heating coefficient measures the energy demand per unit area of dwelling (BTU/sq. ft/Degree Days/yr). Table 4.4 shows the assumed changes in average heat loss coefficient over time; the assumption is based on Rufo and North (2007) which reflects projections of the construction and insulating materials used in the U.S.

Table 4.4. Estimated housing heating and cooling coefficient and percent changes, 2010-2050.

	2010	2015	2020	2025	2030	2035	2040	2045	2050	Change (2010-2050)
Cooling coefficient	9.65	10.03	10.18	10.28	10.14	9.92	9.71	9.49	9.28	-4%
Heating coefficient	5.6	5.5	5.37	5.23	5.04	4.86	4.68	4.49	4.32	-23%

4.2.1.3 Appliance saturation rate

Appliance saturation rates show the penetration of different appliances in the state’s households. Data for appliance saturation for natural gas and electricity appliances is taken from several CEC reports (Rufo

and North 2007; McCarthy, Yang et al. 2008) estimated by housing type as shown in Table 4.5 below. These tables show the relative change (in percentage) from 2010 to 2050.

Table 4.5. Percent changes in appliance saturation rates by dwelling type and by end-use, 2010-2050.

	Electricity		Natural Gas		Solar	
	SFH	MFH	SFH	MFH	SFH	MFH
Space heating	5.7%	6%	-1%	-2%		
Fan for gas furnace	1%	7%				
Central AC	32%	33%	29%	5%		
Room AC	-27%	-11%				
Water heating	0%	2%	2%	9%		
Dishwasher	3%	9%				
Clothes washer	1%	5%				
Clothes dryer	7%	8%	17%	40%		
Cooking	6%	5%	7%	-21%		
Refrigerator	-4%	0%				
Freezer	13%	20%				
Swimming pool pump	7%					
Solar water heater					-44%	41%
Pool pump					342%	

SFH: single-family housing; MFH: multi-family housing

For the lighting end-use service, it is assumed that unit energy consumption grows by 15 kWh per year or 1 percent annually for single-family households and 5 kWh per year or 0.8 percent annually for multi-family households (CEC 2007; Rufo and North 2007).

Table 4.6. Projected changes in lighting demand from 2010 level.

Unit	Single-family housing	Multi-family housing
2010-2050	49%	38%

4.2.1.4 Appliance utilization rate

The appliance utilization rate captures changes in the usage of an end-use device (the increase or decrease in usage per appliance or per household given increased demand) (Table 4.7). Increased appliance utilization rate results in increases in service demand and/or increases in technology annual availability factor (AFA) or capacity factor (CF) at the technology level. The estimates below are based on data for electric appliance (CEC 2007; Rufo and North 2007), and we assume the same rate of increase across all equipment types and across dwelling types.

Table 4.7. Estimated relative percent changes in appliance utilization rate, 2010-2050. Source: (CEC 2007; Rufo and North 2007).

	Single-family housing	Multi-family housing	Weighted
Space heating	10%	5%	
Space cooling	10%	5%	
Water heating	2%	0%	
Dishwasher	6%	0%	4.5%
Clothes Washer	5%	0%	3.8%
Clothes Dryer	6%	-6%	2.4%
Miscellaneous	50%	60%	53%
Cooking	6%	0%	4%
Refrigerator	10%	5%	8.5%
Freezer	0%	0%	0%
Swimming Pool Pump	-1%	0%	-1%

Given the assumed changes in demand drivers described above (number of dwelling units, housing size, building heating/cooling coefficient, appliance saturation rate, and appliance utilization rate), the projected service demand changes for residential sector for 2010-2050 are illustrated in Figure 4.4. The service demands with the highest growth rates are space cooling, water heating, pool pump, and lighting demands.

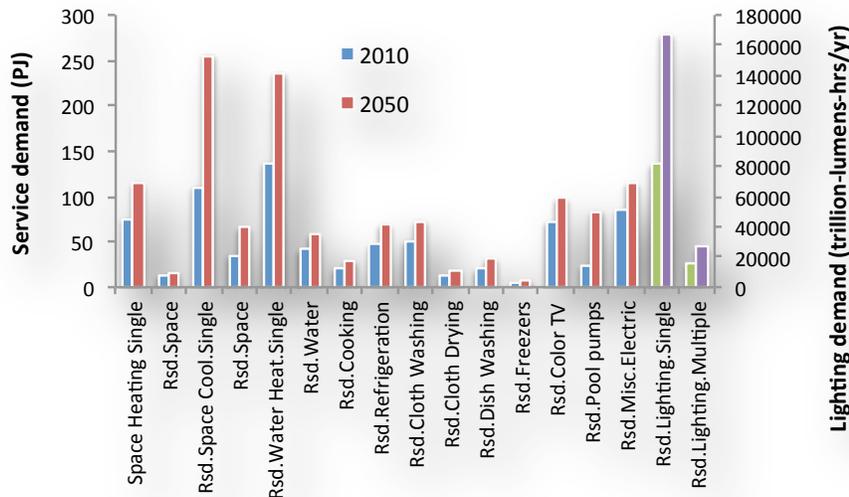


Figure 4.4. Residential service demand changes 2010-2050.

4.2.2 Temporal resolution of end-use demands

In this section, we explain the temporal resolution of space heating and space cooling, and other end-use services that have annual temporal resolution.

4.2.2.1 Space heating

Total demand for space heating is allocated over a year by specifying the fraction of residential space heating demand for each time slice, i.e. bi-monthly temporal resolution. The fraction is calculated based on the total number of heating degree days (HDD) in each 2-month interval averaged over 2008, 2009 and 2010 (Figure 4.5).⁷

⁷ National Oceanic and Atmospheric Administration (<http://lwf.ncdc.noaa.gov/oa/documentlibrary/hcs/hcs.html>).

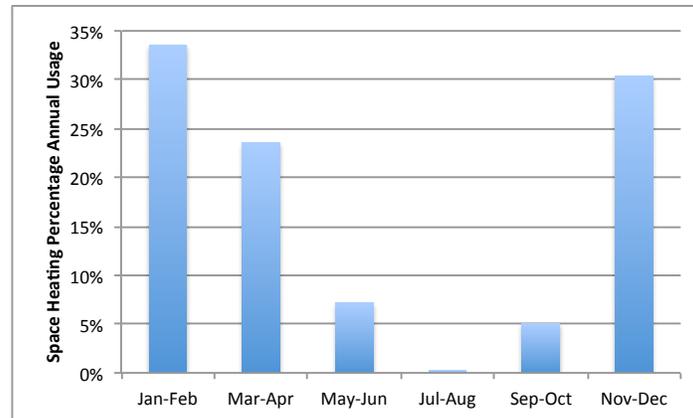


Figure 4.5. Shares of heating demand in a given year for the seasonal time slice (by-monthly) used in CA-TIMES.

4.2.2.2 Space cooling

Residential cooling demand varies by time of day and by season, and contributes significantly to electricity peak energy demand during late afternoon in summer months. The hourly cooling demand is based on McCarthy et al. (2008), which is derived from the hourly electricity demand profile by utility planning area for California in 2003 and assumed to be constant to 2050. The hourly demand for all 8,760 hours is modeled in CA-TIMES using eight daily (every three hour intervals) and six seasonal (average of every two months) time slices as shown in Table 4.8. We assume this profile will remain the same throughout our modeling period.⁸

Table 4.8. Seasonal and hourly profiles of residential cooling demand modeled in CA-TIME time slices. Numbers represent the fraction of a year and the total fraction adds up to 1, numbers in the bottom shows the demand fraction in each two months.

Residential	Jan/Feb	Mar/Apr	May/June	Jul/Aug	Sep/Oct	Nov/Dec
T1 (0 -3 am)	0.000	0.002	0.018	0.048	0.014	0.001
T2 (3-6 am)	0.000	0.002	0.017	0.042	0.014	0.001
T3 (6-9 am)	0.000	0.003	0.022	0.052	0.018	0.001
T4 (9 am-12 pm)	0.000	0.003	0.026	0.069	0.021	0.001
T5 (12-3 pm)	0.000	0.003	0.029	0.089	0.024	0.001
T6 (3-6 pm)	0.000	0.003	0.033	0.104	0.028	0.001
T7 (6-9 pm)	0.000	0.004	0.037	0.102	0.031	0.002
T8 (9pm-12 am)	0.000	0.003	0.029	0.076	0.022	0.001
	0.2%	2.3%	21.1%	58.2%	17.2%	0.9%

4.2.3 Characteristics of end-use technology

Typically, six to eight input parameters are used to characterize a demand technology: stock, efficiency, availability factor, lifetime, year of which the technology becomes available, capital cost, operating and maintenance (O&M) cost, and discount rate (Table 4.9). All technology characteristics are assumed to be the same for single and multi-family homes with few exceptions. These parameters are explained in a greater detail below.

Table 4.9. Technology parameters describing residential end-use technologies.

⁸ In our scenario analysis, we explore the possibility of demand response to various demand management tools such as time-of-day pricing, smart grid, etc. These will be discussed separately in the scenario analysis and the Results chapters.

Parameter	Description	Unit
Stock	Existing capacity	000 units
AFA	Annual availability/utilization factor	Unitless
EFF	Energy efficiency	Unitless.
CEFF	Commodity-based efficiency	Unitless. See heat pump technology
INVCOST	Investment cost in new technology	2010 million\$/000 units for most technologies, 2010 million\$/m-lumens-hrs/yr for lighting
FIXOM	Annual fixed O&M cost	2010 million\$/000 units /yr
Life	Lifetime of new technology	Years
DISCRATE	Technology-specific discount rate (hurdle rate) ⁹	%

4.2.3.1 Efficiency

The efficiency of technologies is defined as energy delivered/energy input, but there are many variations. The definitions of different efficiency metrics are shown in Table 4.10. They are further tied with end-uses in Table 4.11.

Table 4.10. Definitions of efficiency of end-use technologies

AFUE	Annual fuel utilization efficiency	Efficiency rating based on average usage, including on and off cycling, it is a thermal efficiency measure of combustion equipment like furnaces, boilers, and water heaters.
COP	Coefficient of performance	The ratio of the heating or cooling provided over the electrical energy consumed.
EER	Energy efficiency ratio	The ratio of output cooling (in BTU/h) to input electrical power (in watts) at a given operating point.
EF	Energy factor	Total energy consumed in active, cycling, and standby modes..
HSPF	Heating seasonal performance factor	The total heating output of a heat pump in Btu during its normal annual usage.
SEER	Seasonal energy efficiency ratio	The rating of a unit is the cooling output during a typical cooling-season divided by the total electric energy input during the same period.

Table 4.11. Efficiency metrics describing residential end-use technologies.

End-Use	End-Use Equipment	Efficiency Metric
Space heating	Heat pump, wood stove	COP [HSPF/3.412]
	Electric furnace, electric radiator	COP
	Fuel oil boiler/radiator/furnace, kerosene furnace, LPG furnace, natural gas boiler/radiator	AFUE
Space cooling	Heat pump, air conditioner	COP [SEER/ 3.412]
	Ground-source heat pump, natural gas heat pump	EER
Water heating	Water heater	EF
Cooking	Range (electric)	Kilowatt-hours per year (kWh/yr)
	Range (other fuel type)	Thermal Efficiency (Btu Out / Btu In)
Clothes drying	Clothes dryer	EF
Clothes washing	Clothes washer	kWh / cycle (motor), Modified Energy Factor ¹⁰ , Water Factor ¹¹
Dishwashing	Dishwasher	EF, Water Factor
Refrigeration	Refrigerator	kWh/yr

⁹ “Hurdle” rates, or technology specific discount rates, is used to represent non-economic, behavioral aspects of investment choices (e.g., consumer preferences, expectation of very rapid rates of return, or information gaps).

¹⁰ It counts the amount of dryer energy used to remove the remaining moisture content in washed items, in addition to the machine energy and water heating energy of the washer.

¹¹ The number of gallons per cycle per cubic foot that a washer uses.

Freezing	Freezer	kWh/yr
Lighting	Light bulbs	Billion lumens/TJ/yr

Heat pump technology (electric, natural gas or geothermal) generates both heating and cooling demand. Even though heat pump is a single unit, cooling efficiency is higher than heating efficiency. Thus the efficiency and capital cost of heat pumps are estimated separately for heating and cooling as if they are two separate technologies in order to compare with other competing heating and cooling technology.

Lighting technologies are divided into four main categories of bulb type: general service (compact fluorescent lamp, incandescent lamp and LED lamp), reflector, linear fluorescent, and torchiere. For the existing stock it is assumed that 50% of used technologies are regular lamps and the other 50% are efficient bulbs.

4.2.4 Calibration to 2010

The technology stock and efficiency are calibrated to final energy demand in 2010. The majority of the data sources for the base year calibration are based on 2005 Residential Energy Consumption Survey (EIA 2008), 2009 Residential Energy Consumption Survey (U.S. EIA 2012), and CEC AEP scenario by (McCarthy, Yang et al. 2008) and further extrapolation. Future projections of technology type, fuel type, efficiency, capital cost, and capacity factors are based on “Residential Technology Equipment Type” file obtained from the EIA, which is by the Energy Information Administration for the National Energy Modeling System (NEMS) model for the AEO 2013 projection (EIA 2013).

The technology efficiency, stock, and estimated final energy demand for 2010, and assumptions for future technology are provided in the accompanying spreadsheet. Figure 4.6 shows the final energy demand of residential sector in 2010. Similar to transportation and commercial sectors, future residential technology adoption and fuel uses are projected endogenously based on the assumptions of technology costs, efficiency, fuel uses and other characteristics described in Section 4.2.3, and various constraints such as efficiency standards and the interactions with the rest of the system (e.g. fuel prices and an economy-wide carbon cap).

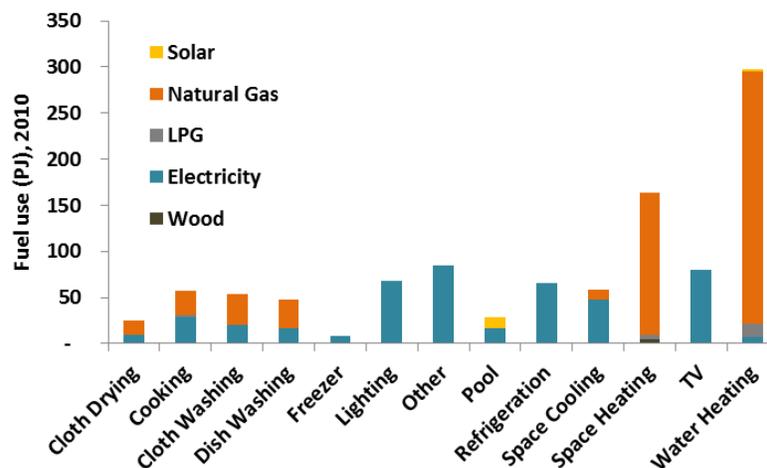


Figure 4.6. Calibrated residential end- use by fuel type, 2010.

4.2.5 Levelized cost and growth constraints

Technology levelized cost (in 2010M\$/PJ) is calculated based on the following equation:

$$Levelized\ Cost = (Investment\ Cost \times CRF + O \ \& \ M\ Cost) / AF + Fuel\ Cost / Eff \quad (\text{Equation 4.4})$$

Where,

<i>Investment Cost</i>	Technology capital cost (2010 M\$/1000 units),
<i>CRF</i>	Capital recovery factor, $\frac{1}{(1+r)} \times \frac{r}{1-(1+r)^{-life}}$,
<i>O&M Cost</i>	Fixed O&M (2010M\$/1000 Units/yr),
<i>AF</i>	Availability factor (TJ/Units/yr),
<i>Fuel Cost</i>	Fuel cost (2010M\$/PJ),
<i>Eff</i>	Efficiency,
<i>r</i>	Technology-specific discount rate (hurdle rate), %,
<i>Life</i>	Economic lifetime of technology.

The levelized costs of different end-use technologies are summarized in Appendix C.

Given the typical all-or-nothing behavior of the optimization model, we added growth constraints to the growth rates of technology penetration over time. We assumed that in each year existing technologies can have an up to 5% growth rate per year, while new technologies that do not have any share in the base year stock can grow up to 20% each year. We put these constraints in order to smooth out the transition to avoid a specific technology taking over the entire market over a very short period of time.

4.3 Commercial End Use Sector

The commercial sector contributes about 4% of total state’s GHG emissions (Figure 1.2). Like the transportation and residential sectors, the commercial sector is modeled through detailed technology options, and the model endogenously estimates technology adoptions and final energy uses over the modeling period.

Commercial sector energy consumption per square foot in California has shown a steep reduction since the 1980s and has been lower than other states. This decline is due to the efficiency standards, building codes, and California’s climate (Bernstein, Lempert et al. 2000). In order to model energy usage of commercial sector we break this sector into 12 building types and each of these buildings has a demand for 10 different end-use energy services, which are shown in Table 4.12.

Table 4.12. Commercial building types and end-use energy services.

Building Types	End-use energy service
Small Offices	Heating
Restaurants	Cooling (small and Large)
Retail	Ventilation (small and Large)
Grocery and Food Stores	Water Heating
Warehouse	Cooking
Refrigerated Warehouse	Refrigeration
Schools	Lighting (Indoor and Outdoor)
Colleges and Universities	Miscellaneous
Hospitals	Office Equipment
Hotels and Motels	
Miscellaneous	
Large Offices	

Many end-use technologies can be used to satisfy each end-use service demand, like walk-in refrigerators, central ACs, heat pumps, etc. This wide range of technologies consumes fuels such as natural gas and electricity and has various efficiency levels and costs. The schematic diagram of commercial sector in CA-TIMES is shown in Figure 4.7.

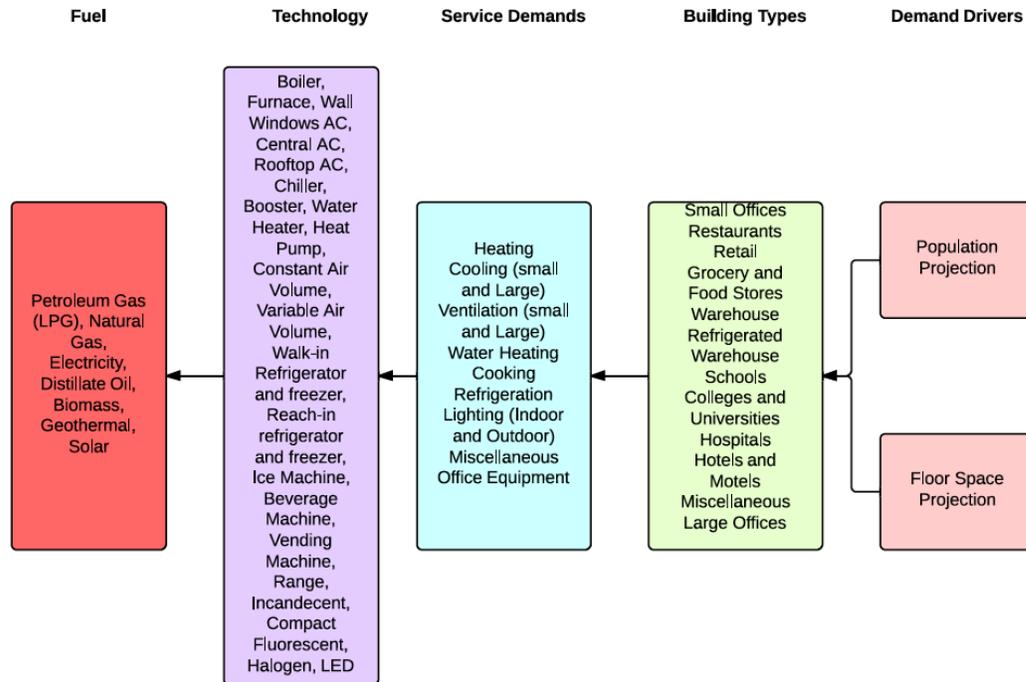


Figure 4.7. The structure of energy demand and supply for CA-TIMES v1.5 commercial sector.

Our model endogenously chooses the least cost available technologies based on economic factors and policy constraints to satisfy commercial end-use service demands over time. Final energy demand is also calculated endogenously according to efficiencies of projected technology adoption.

We use estimates of 2010 electricity and natural gas usage by commercial end-use energy service demand and building type from IEPR report (CEC 2011). This energy use data by fuel type is combined with data from National Energy Modeling System (NEMS), which supplies the mix of technologies that is used to meet energy service demand for the Pacific region for 2012. The technologies used in region 9 (pacific region) are assumed to be representative of California technologies, and the technology mix from 2012 is assumed to be representative of the 2010 mix.

Combining fuel usage and the mix and efficiency of technologies, we back calculate the energy-service demand using Equation 4.5, where energy service demand for a given end-use (e.g. cooling or heating) j is equal to the fuel demand scaled by the weighted technology efficiency values (by technology market share) over all technologies, i .

$$Energy\ Service\ Demand_j = \frac{Electricity\ Demand_j}{\sum_i \left(\frac{TechMktShr_i}{\eta_i} \right)} + \frac{Natural\ Gas\ Demand_j}{\sum_i \left(\frac{TechMktShr_i}{\eta_i} \right)} \quad (\text{Equation 4.5})$$

where η_i is the efficiency of technology i .

For projecting the end-use service demand to 2050, we assume that the energy service demand is constant per square foot for a given building type, i.e. the cooling demand (not energy use) per square foot is constant for a grocery store to 2050. The changes in aggregate energy service demand are a result of changes to floor space of each building type. These energy service demands are aggregated over all building types and an annual projection of energy service demands is made.

$$Energy\ Service\ Demand_{total} = \sum_j (Floorspace_j)(Energy\ Service\ Per\ SqFt_j) \quad (\text{Equation 4.6})$$

where j is the building type.

The CEC report (2009) reports historical and projected commercial floor space for each of the 12 building types from 1964 to 2020. We extrapolate the floor space per capita trend from 1990 to 2020 out to 2050. The annual change in floor space per capita (F/cap) for a given building type (i) is calculated by the following:

$$\Delta F / cap_{i,ann} = \frac{F / cap_{i,2020} - F / cap_{i,1990}}{30} \quad (\text{Equation 4.7})$$

Total commercial floor space per capita aggregated over all building types increases from 183 sq.ft per person in 1990 to 200 sq.ft. per person in 2020 to 217 sq.ft. per person in 2050. The total floor space for each building type in a given year is calculated by multiplying the population projection by the floor space per capita projection for a given year. Total commercial floor space increases from 5,453 million sq.ft. in 1990 to 8,816 million sq.ft. in 2020 to 12,892 million sq.ft. in 2050 (Figure 4.8).

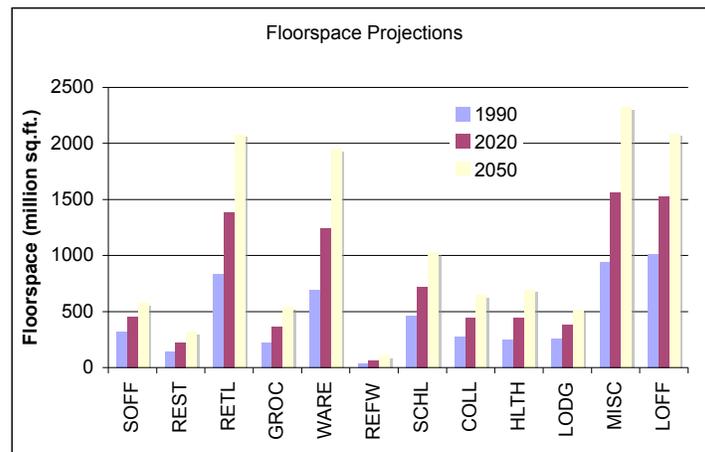


Figure 4.8. Floor space projection by building type. SOFF: Small Offices, REST: Restaurants, RETL: Retail, GROC: Groceries, WARE: Warehouses, SCHL: Schools, HLTH: Hospitals and Health LODG: Hotels, REFW: Refrigerated warehouses, MISC: Miscellaneous, LOFF: Large Offices.

The projected commercial end-use service demand based on the given explanation is shown in Figure 4.9.

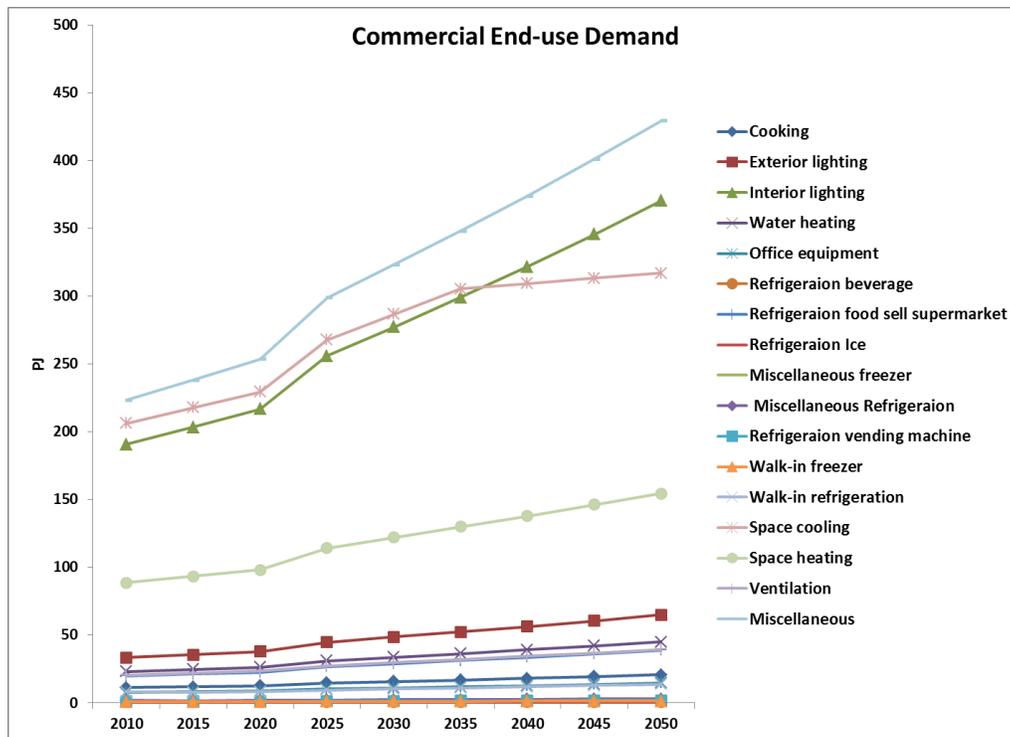


Figure 4.9. Commercial service demand projected to 2050 (note: most service demands are in PJ, but that lighting and ventilation service demands are in different units (billion lumen-yr and trillion CFM-yr).

4.3.1 End-use demand by time slice

ITRON data prepared for the California Energy Commission is used to break out energy demands by building type and end-use into fractional energy use by time slice (ITRON 2006). The original data gives end-use demands for each hour of the year by building type, end-use demand and fuel. This data is aggregated to combine different fuel types and to obtain data that fit into our 48 time slices, as described in earlier chapters (8 daily time slices for every 3-hr interval, and 6 seasonal time slices for every 2-month interval). The data gives details of the fraction of annual energy use that occurs in a given time slice for each building type and end-use demand.

Figure 4.10 shows a small subset of the data: how energy service demands vary over the course of the day (in Jan and Feb) for retail commercial buildings. Most demands follow the same daily pattern with the maximum demand in time periods 4 through 6 (noon to 6 pm) and low at night. Exceptions are refrigeration (constant) and heating and external lighting (peak in early morning and at night, respectively).

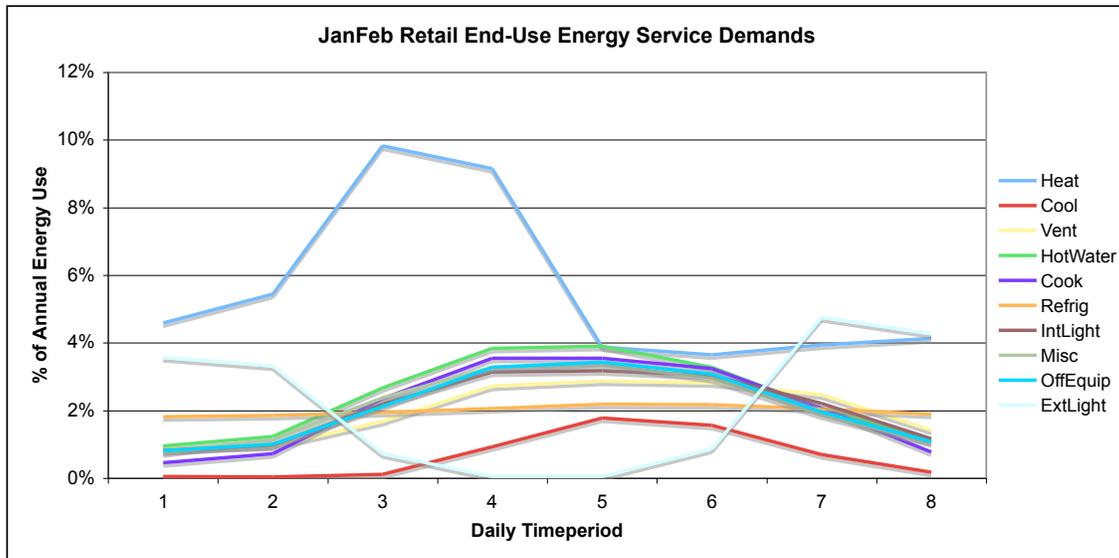


Figure 4.10. Daily variation of service demand for retail commercial building in January and February. The daily time period is grouped into three-hour time slices. Thus the daily time period 1 corresponds to 12 am-3 am, and so on.

4.3.2 Technology characteristics

We use six to eight input parameters to characterize a demand technology in commercial sector. These parameters are described in Table 4.13.

Table 4.13. Technology parameters describing commercial end-use technologies.

Parameter	Description	Unit
Demand	Demand for energy service	PJ/yr; billion lumens hours/year for lighting; trillion cubic feet (TCF) per year for ventilation
Stock	Existing installed capacity	PJ/yr; billion lumens/yr for lighting; TCF/year for ventilation
AF	Annual availability/utilization factor	Unitless
EFF	Technical efficiency	PJ/PJ; billion lumens years/PJ for lighting; TCF per minute (TCFM)/PJ for ventilation
CEFF	Commodity-based efficiency	PJ/PJ for heat pumps
INVCOST	Total cost of investment in new capacity	2010 Million\$/PJ (2010 Million\$/b-lumens for lighting and 2010 Million\$/TCFM for ventilation)
FIXOM	Annual fixed O&M cost	2010 Million\$/PJ/yr (2010 Million\$/b-lumens yrs for lighting and 2010 Million\$/TCFM for ventilation)
Life	Lifetime of new technology	Years
DISCRATE	Technology-specific discount rate (hurdle rate)	%

Energy consumption and floor space projection data come from CEC reports (CEC 2009; CEC 2011). Assumptions of technologies are based on “ktek.xml” file obtained from the EIA, which is used for the National Energy Modeling System (NEMS) model for the AEO 2013 projection (EIA 2013). Our model is calibrated to the year 2010. The final energy consumption by end-use service demand is shown in Figure 4.11. Additionally, levelized costs of commercial sector technologies are calculated similar to residential sector, and they are documented in Appendix C.

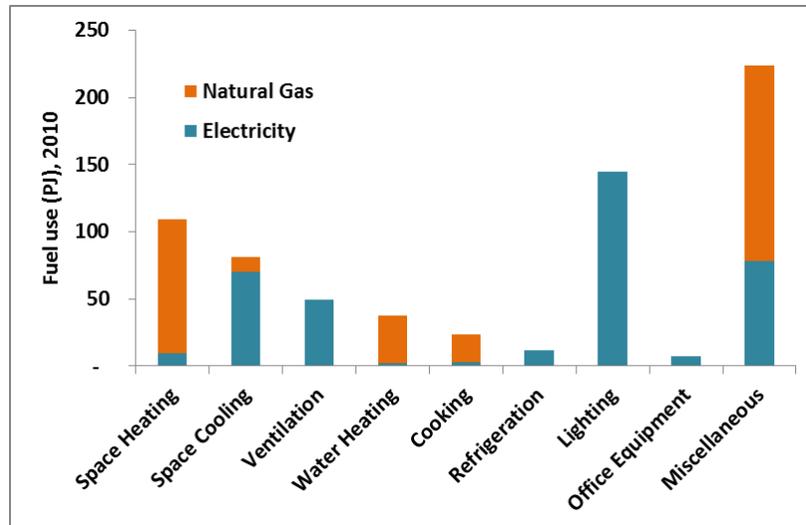


Figure 4. 11. Commercial fuel use by end use, 2010.

Similar to the residential sector, the commercial sector is calibrated to the year 2010. For the projection of future technology adoption, growth rate are added as explained in the residential sector. Similar to residential sector, we assume that technologies with existing stock can only grow up to 5% each year, while new technologies that do not have any share in the base year stock can grow up to 20% each year.

4.4 Industrial Sector

The industrial sector contributes to 20% of the state’s GHG emissions (Figure 1.2). The current version of the CA-TIMES model has a fairly simple representation of end-use energy consumption in the industrial and agricultural and other non-energy (Section 4.5) sectors. In this version (v1.5) of the model, we represent final energy consumption in the industrial sectors with generic input-output technologies, as illustrated in Figure 2.1. An input-output technology consumes exogenously specified quantities of various types of fuel in each year. In other words, both the supply of final energy and the demand for total useful energy are specified in energy units (e.g., PJ) and they are equal to each other, i.e. the efficiency of each of the generic input-output technologies is set at 100%. Total useful energy demand and the breakdown of final energy by fuel type are calibrated to published energy statistics for the base-year 2010, using the fuel use estimates of the CARB GHG Inventory (CARB, 2010b). Obviously, given this rigid framework, the model is not free to make fuel use and investment decisions by trading off the costs, emissions, and efficiencies of competing end-use technologies (e.g., boilers, furnaces, CHP, etc.), as it is able to do in the supply and other end-use sectors. However, while most model runs in this report use these fixed specified fuel demands, operation of the CA-TIMES model with the elastic demand framework does partially allow for feedback and interplay with the other sectors, since in this model configuration the fuel demands are price elastic thus changes of price/quantity in other sectors in response to policies will also affect the fuel use demand in the industrial sector, albeit in a much more non-transparent (and pure econometric) fashion.

Fuels use demands in the Reference Case are draw heavily from the California Energy Commission and UC-Davis Advanced Energy Pathways (AEP) project (McCarthy, Yang et al. 2008); while fuel use changes under the Deep GHG Reduction Scenario are largely based on the magnitude projected in the BLUE Map scenarios of the IEA’s Energy Technology Perspectives (ETP) 2010 study (IEA 2010). Figure 4.12 shows the exogenously defined industrial energy demand in the BAU and GHG scenarios. Total demand for industrial energy in the GHG scenarios is 13% lower in 2050 and has a significant shift towards the use of electricity (from 30% to 80%) compared with the BAU scenario.

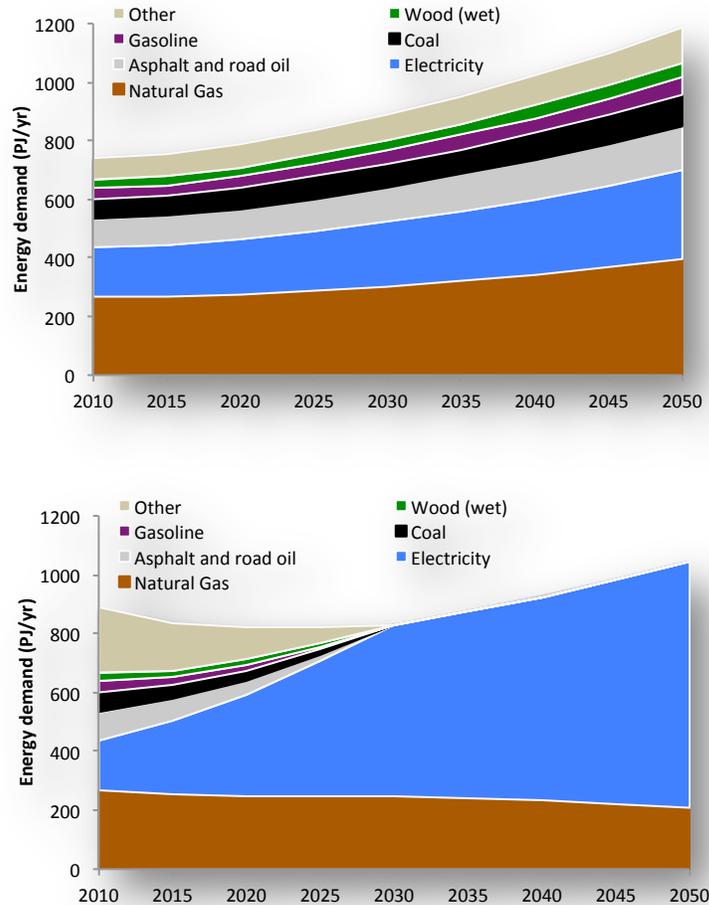


Figure 4. 12. Industrial final energy demand assumed in the BAU (top) and GHG policy (bottom) scenarios.

4.5 Agricultural and Non-Energy Sector

The smallest of California’s end-use energy sectors is agriculture. It accounts for only 1.6% of the state’s total energy demand, despite the fact that agriculture plays such an important role in California’s economy and society. It is important to note that the fuel consumption in agricultural vehicles is not included here, but rather in the transportation sector. Most energy use in the agricultural sector is used to operate pumps, lighting and other farm/fishery equipment. Yet, even if energy demands for agricultural vehicles were included, total energy demand for the agricultural sector would still only amount to 2.3% of all end-use energy consumption in California. Like the industrial sector, energy service demands are not modeled with endogenous technology adoption. Rather, a scenario was developed to represent final energy consumption in the agricultural sector with generic input-output technologies. Figure 4.13 shows the exogenously defined agriculture energy demand in the BAU and GHG scenarios. Electricity makes up the majority of agricultural energy use (since we are excluding vehicles) and the major shift for the GHG scenarios is the assumption that petroleum based fuels are replaced with natural gas.

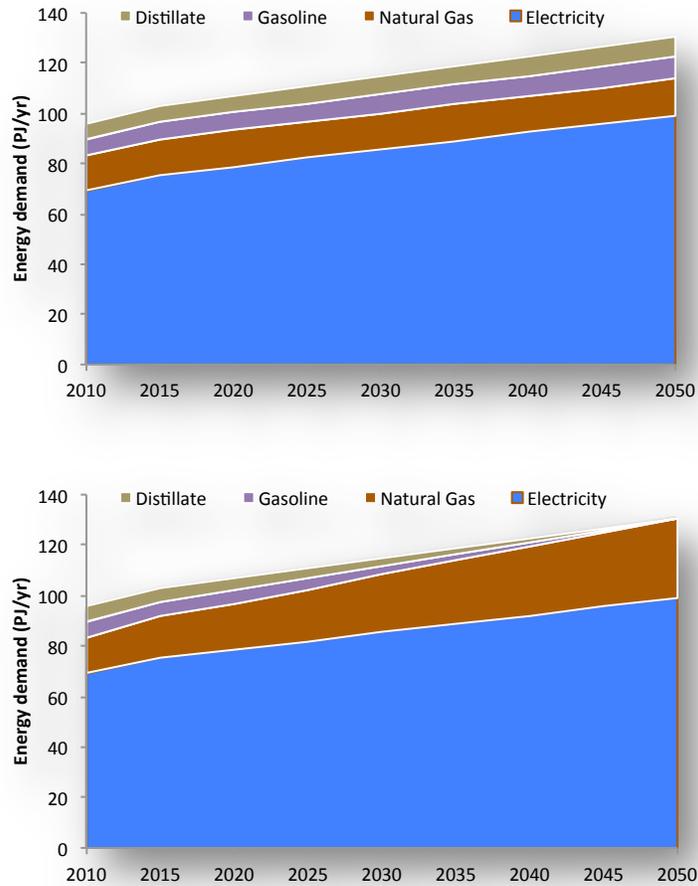


Figure 4. 13. Agriculture final energy demand assumed in the BAU (top) and GHG policy (bottom) scenarios.

Non-energy sector GHG emissions (accounting for around 13% of emissions in the base year) are not included in CA-TIMES model at the present time. In the deep greenhouse gas scenarios, it is assumed that these emissions are also controlled to a similar extent as combustion related emissions.

5. SCENARIOS

One of the main values of the CA-TIMES model is to run the model with varying sets of technology, resource and policy-related inputs and analyze the results to understand which options the model chooses as the optimal solution to satisfy the energy service demands. These scenarios, as we will define below, can result in a very different mix of technologies and resources in the optimal solutions.

There are a number of choices that are made when running a specific scenario, and these choices will impact the modeling results: technology mix, system costs, and emissions profile. **Table 5. 1** shows a list of generic choices that need to be made when developing a scenario.

Table 5. 1. List of choices that define a scenario’s inputs and influence the optimization model results

Category	Examples of Scenario Variants
Demand	Energy service vs. fuel demands Inelastic vs. elastic demands Varying levels of forecasted demand <i>e.g. VMT, residential space heating, industrial electricity use</i>
Technology	Technology cost trajectory (over time) Technology growth constraints Technology share constraints
Resource	Resource cost (over time) Resource availability and limitations (over time) Supply curve vs. price/cost trajectory Intermittent renewable availability <i>e.g. in-state biomass supply curves, wind speed profile</i>
Policy	Technology subsidies Technology mandates or bans <i>e.g. Zero Emission Vehicles (ZEV) mandates</i> Performance standards <i>e.g. Renewable Portfolio Standard (RPS), Low Carbon Fuel Standard (LCFS)</i> Pollution taxes or caps <i>e.g. carbon cap, biofuel volume mandate, prohibition on nuclear</i>

Many of the technology options are described in earlier sections covering each sector (transportation, electricity, residential and commercial). This section will focus primarily on policy and technology choices that influence the least-cost pathways for reference (BAU) futures (which do not attempt to mitigate GHG emissions beyond currently implemented policies) and futures that attempt to achieve the state’s target of an 80% reduction in GHG by 2050. The goal of this section is used to understand how the California energy system could be significantly decarbonized in the long term, what the technological and resource implications might be in such a case, and how much the energy system transition could cost. Several GHG scenario variants are analyzed in which policies, technology and resource availability, and technology and resource costs are varied, in order to understand how the transition to a low-carbon economy in California could be different if the potential of certain technologies and resources is substantially restricted or enhanced.

5.1 Reference Scenario

The CA-TIMES Reference Case is a scenario describing the potential development of California’s energy system over the next several decades under the business-as-usual (BAU) conditions. It is best interpreted not as a prediction of what will happen between now and 2050, but rather a single vision of what *could* happen, if the technological and policy assumptions in the model were to come to fruition and the various decision makers within society (e.g. consumers, firms and governments) behaved in a manner that minimizes societal costs. While, in theory, a number of Reference Case scenarios could be developed, it is

really only practical to develop one. The Reference Case is the scenario to which all other scenarios, especially the deep GHG reduction scenarios, are compared.

The following section illustrates the development of the energy system in the Reference Case. It hopefully provides a sense for how the system could potentially develop in the absence of any substantial effort to make a transition in California toward a low-carbon society beyond 2020.

The reference scenario has a baseline level of energy service and fuel demands that are taken from multiple sources, including VMT projections from EMFAC 2011 (CARB 2011), industrial and agricultural fuel demands from (McCarthy, Yang et al. 2008) and residential and commercial energy service demands are based upon population, household and floorspace projections from numerous sources. These assumptions are explained in greater details in Sections 3 and 4.

5.1.1 Reference scenario policies

Policy is an important driver of energy system development. And while the previous sections have discussed the most important resource, technology, and demand assumptions – and their respective data sources – used to develop the CA-TIMES Reference scenario, the Reference scenario is also strongly dependent on current policies and how they are assumed to develop over time.

Table 5.2 lists the policies represented in the Reference scenario. Although it is not possible to represent every single policy that affects California’s energy system, the list below attempts to capture those of greatest importance and with the largest impact. A more detailed description of each of these policies, and how it is modeled, is given in Appendix D.

Table 5.2. Brief descriptions of policies represented in the CA-TIMES v1.5 reference scenario

<i>Scenario</i>	<i>Policies</i>
<i>Reference</i>	<ul style="list-style-type: none"> - Current biofuel tax credits - Current biofuel import tariffs - Current transportation fuel taxes - CAFE standards to 2016 (39.5 mpg and 29.8 mpg for cars and trucks, respectively) - CAFE standards to 2025 (59.8 mpg and 45.1 mpg for cars and trucks, respectively) - Federal and California electric vehicle subsidies - Low carbon fuel standard (LCFS) biofuel volume <i>scenario</i>¹² to 2022 (retired after 2022) - Power plant electricity GHG standard (baseload must meet NGCC emissions) - Renewable portfolio standard (33% by 2020 and remains at 33% until 2050) - Renewable electricity production tax credit, solar investment tax credit - Zero Emission Vehicle (ZEV) mandate policy <i>constraint</i> to 2025 (retired after 2025)

There are a number of current policies that have not been incorporated into the reference case, SB1505, SB375 and the Federal heavy duty GHG rule. These may be incorporated into future iterations of the model.

¹² The LCFS policy shown here is a scenarios that defines a single or limited sets of fuel options that will satisfy this policy, rather than a more realistic and flexible representation of the policy that can be met with multiple fuel mixes. The assumptions of the LCFS scenario are detailed in Appendix D. A more realistic performance-based LCFS policy scenario has been set-up, but was not available in time for incorporating into this version of the model.

5.2 Greenhouse Gas Scenarios

The Greenhouse Gas Reduction Scenarios (GHG) describe a number of different futures in which the California's energy system undergoes substantial decarbonization over the next several decades in the context of a social, political, and economic framework that first recognizes and then acts to mitigate the threat of climate change, both within California and in the rest of the U.S. and the world. Hence, individuals, firms, and governments all make substantial efforts to make a transition in California toward a low-carbon society. Again, these scenarios should not be mistaken as predictions of what will happen as a result of strong climate policy, but rather as individual visions of what *could* feasibly happen, under the large set of technological and policy assumptions embedded in the model. The probability of any one scenario results occurring is essentially zero. However, their value is in understanding the role that technology and resource costs and availability and policy can play in influencing the development of the future energy system to 2050.

While a large number of scenarios can be developed (as there are tens to hundreds of assumptions that are connected to the thousands of technologies embedded in the model, each of which can be varied), a limited number will be discussed here. An overriding theme to these GHG scenarios is that they attempt to achieve an 80% reduction in GHG emissions below 1990 levels by 2050. Multiple GHG scenarios are developed that investigate interesting variants of this core goal, where changes in demand assumptions or the availability of key resources and technologies is altered.

5.2.1 Greenhouse gas scenarios policies

Policy is the most important driver for dramatic energy system transitions. The GHG scenarios include all policies that are represented in the Reference Case (

Table 5.2), as well as additional policies that would also need to be enacted, in order to meet a very stringent GHG target. For example, the state has a goal of an 80% reduction in GHG emissions below 1990 levels by 2050 (*80in50*), but current policies and regulatory mechanism in place are not enough to achieve the 2050 target (BAU emission trajectory). Market mechanisms such as a cap-and-trade (i.e., emissions trading) program, a carbon tax with stringent caps, or tax level would be needed.

For simplicity and transparency, two types of constraints to modeling the 80in50 target are used in the CA-TIMES model. The first type of constraint is called the "Step" cap which a cap is held at the 2020 target (1990 levels) between 2020 and 2050 but then dropped to 80% below 1990 emissions in 2050. The second type of constraint is a declining carbon cap – specifically, a straight-line trajectory from 2020 to 2050 is assumed and called "Line". **Figure 5.5** shows the numerical values for the GHG emissions caps assumed in both constraints. Though the Step emissions cap makes a dramatic reduction in 2050, the actual path of emissions is unlikely to follow this cap because of the difficulty of reducing emissions so quickly in the year(s) before 2050.

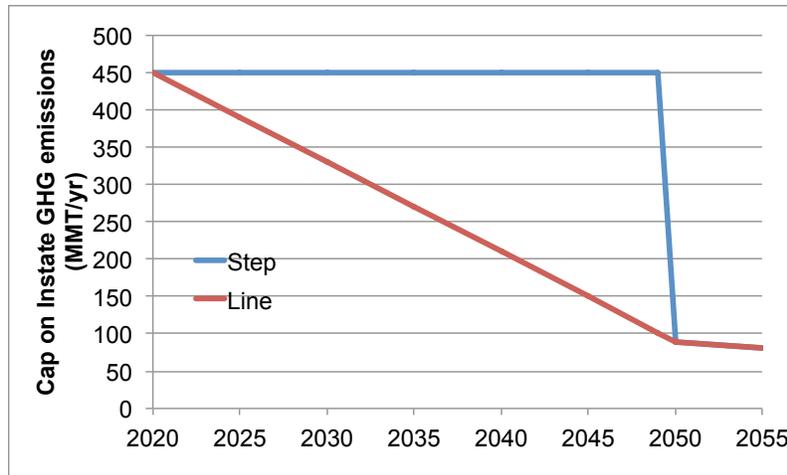


Figure 5.5. Carbon cap by year for the GHG policy scenarios, GHG-Line and GHG-Step. Both achieve 80% reduction from 1990 emissions levels by 2050 with a slight decrease (10%) beyond that in 2055.

Beyond the carbon constraint, there are no other policies that are included in the GHG Scenarios that are not included in the Reference case. In the GHG scenarios, VMT reductions are implemented for many transport sectors, which correspond to a suite of strong travel demand management (TDM) policies dealing with transit, land use, and auto pricing. These lead to a reduction in light-duty vehicle (LDV) VMT by 24%, and heavy-duty vehicle (HDV) and medium-duty vehicle (MDV) VMT by 10% in 2050 relative to the Reference case. Also, passenger automobile share of the light duty vehicle market is expected to climb to 75% in the GHG scenarios (the baseline share in the Reference case is 65%).

5.3 Scenario Variations

The sensitivity scenarios are used to understand the impact of changing input assumptions, technology availability or policy constraints can have on the on the ability of the state to meet the 80in50 target and cost and mix of options used to achieve the GHG reductions. The key sensitivity parameters for the 80% greenhouse gas reduction scenarios that will be discussed are shown in Table 5.3.

Table 5.3. Sensitivity parameters for GHG scenarios. “GHG-S” represents scenarios with a “step” constraint on GHG emissions as described in the previous section, and “GHG-L” represents scenarios with a “line” constraint on GHG emissions between 2020-2050.

Sensitivity Case	Description
Nuclear power plant availability (GHG-S-Nuclear)	Base GHG case: Existing nuclear power retired in 2030. No new nuclear power plants allowed Sensitivity case: New nuclear power plants are allowed to be built
Carbon capture and sequestration (CCS) availability (GHG-S-CCS)	Base GHG case: No electricity or fuel plants will use CCS as the technology remains unproven Sensitivity case: CCS is available on many different types of plants
Rapid deployment of wind and solar (GHG-S-HiRenGrowth)	Base GHG case: Wind power growth for CA is limited to 3GW/yr, utility solar is limited to 2.5 GW/yr and distributed solar PV is limited to 1 GW/yr in 2030 (and up to 4 GW, 3 GW, and 1.2 GW/yr in 2050) Sensitivity case: Wind power growth for CA is limited to 4 GW/yr, utility solar is limited to 4 GW/yr and distributed solar PV is limited to 2 GW/yr in 2030 (and up to 6 GW, 6 GW and 3 GW/yr in 2050)
Elastic demand (GHG-S-Elastic)	Base GHG case: Demand for energy services in residential, commercial and transportation sectors is fixed

	Sensitivity case: Demand for energy services can vary based upon elasticity of demands and endogenous price changes
Low battery costs <i>(GHG-S-Batt)</i>	Base GHG case: Plug-in light-duty vehicle (cars and light trucks) have moderate reductions in battery costs lead to incremental costs (relative to gasoline vehicles) between \$3000-\$7000 depending upon battery size in 2030-2050 Sensitivity case: Plug-in light-duty vehicle (cars and light trucks) have moderate reductions in battery costs lead to incremental costs (relative to gasoline vehicles) between -\$600-\$3000 depending upon vehicle type and battery size in 2050
Low fuel cell costs <i>(GHG-S-FC)</i>	Base GHG case: Hydrogen fuel cell light-duty vehicle (cars and light trucks) have moderate reductions in fuel cell costs lead to incremental costs (relative to gasoline vehicles) around \$5700 in 2035-2050 Sensitivity case: Hydrogen fuel cell light-duty vehicle (cars and light trucks) have moderate reductions in fuel cell costs lead to incremental costs (relative to gasoline vehicles) of \$1100 in 2030 and -\$500 by 2050
High and low Oil and gas prices <i>(GHG-S-HiOilGas)</i> <i>(GHG-S-LoOilGas)</i>	Base GHG case: Oil price rises to \$130/bbl in 2030 and \$180/bbl in 2050. Gas price rises \$5.4/MMBTU in 2030 and over \$8/MMBTU in 2050 High Price Sensitivity case: Oil price rises to \$191/bbl in 2030 and \$250/bbl in 2050. Gas price rises to \$7/MMBTU in 2030 and over \$11/MMBTU in 2050 Low Price Sensitivity case: Oil price declines to \$72/bbl in 2030 and \$70/bbl in 2050. Gas price declines to \$3.3/MMBTU in 2030 and over \$3.7/MMBTU in 2050 The cost assumptions are shown in Figure 3.2
Increased biomass supply <i>(GHG-S-HiBio)</i>	Base GHG case: Details of biomass supply are specified in Section 3.2, but overall supply is limited to nearly 1800 PJ from California and neighboring states in 2050 Sensitivity case: This scenario assumes that the available biomass supply is double that of the base case at the same costs as in the base GHG case.

As with any modeling work, there are many more possible scenarios that would be interesting to explore but could not be run due to time limitations. Future work will explore many more variations on input assumptions, resource availability, and policy constraints, to further explore the sensitivity of CA-TIMES to these model inputs.

6. RESULTS

Modeling is a complex, but inexact science and these large energy system models are a very simplified and sometimes poor representation of reality. CA-TIMES is no exception and as a relatively young model (development started in 2009), scenarios and model structure and assumptions are continually being modified and adjusted. The results shown in this section represent a set of modeling results from CA-TIMES as it stands now (CA-TIMES v1.5).

6.1. Primary Scenarios

This section will review the key results from the three primary scenarios: (1) the Reference (BAU) case, (2) the 80% GHG emissions reduction case with the “Step” CO₂ cap (GHG-Step) and (3) the GHG emissions reduction case with the linear “Line” CO₂ cap (GHG-Line).

The in-state Reference scenario GHG emissions is shown in **Figure 6.1**. In this scenario, emissions are shown declining from the base year of 2010 to 2025 and growing slightly from there (from 400 to 425 MMTCO₂e per year) to 2050. The 2020 GHG emissions are 435 MMTCO₂e/yr even though the AB32 cap on emissions is not a constraint in this Reference scenario. In the graph, emissions from energy supply (i.e. electricity and energy transport, conversion and fuel production) are assigned to the relevant end-use sectors.

In 2050, in-state GHG emissions are approximately 5% lower than 1990 levels. Emissions from all end-use sectors decline slightly but remain similar in scale to 2010 levels. The largest emissions source remains transportation, which accounts for just over half of in-state emissions and which declines very slightly over the modeling period (279 MMTCO₂e in 2010 to 236 MMTCO₂e in 2050)¹³.

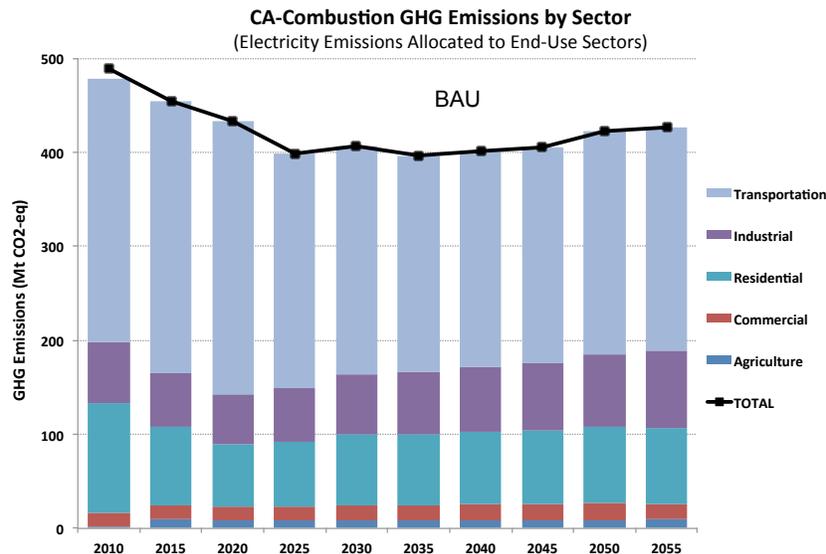


Figure 6.1. Instate GHG emissions from 2010 to 2055 by sector for the Reference scenario. Instate emissions include shipping and aviation emissions not included in the State’s GHG emission inventory.

When the 80% GHG emissions reduction constraint is added, both primary GHG scenarios are not able to meet the 80% GHG reduction target in 2050. Both scenarios are able to reduce emissions below 1990

¹³ These values differ from the ARB’s official emissions inventory because of the inclusion of interstate and international aviation and marine transport fuel usage.

levels by 62% falling about 18% short of the 80% target. Note that our model includes shipping and aviation emissions not included in the State’s GHG emission inventory. In addition, we do not consider offsets option in the carbon cap scenario. Therefore, our 80% GHG scenario can be considered more stringent than the implementation plan adopted by CARB. In the GHG-Step scenario, even though the emissions cap stays constant at the 2020 target (450 MMTCO₂e), emissions decline to about 370 MMTCO₂e in 2030 and 256 MMTCO₂e in 2045. The GHG-Step scenario emissions are 170 MMTCO₂e in 2050, nearly double the target of 90 MMTCO₂e. Transportation continues to provide the majority of emissions while emissions from industrial, residential and commercial shrink dramatically. Transportation alone exceeds the 2050 emissions target at around 110 MMTCO₂e.

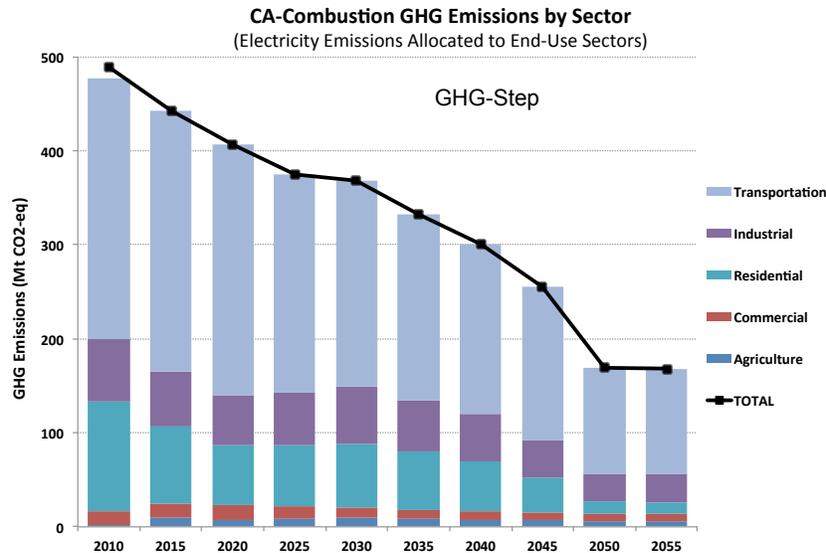


Figure 6.2. Instate GHG emissions from 2010 to 2055 by sector for the 80% GHG reduction Step scenario (GHG-Step).

The 2050 emissions of the GHG-Line scenario are essentially identical to that of the GHG-Step scenario (168 MMTCO₂e). The difference between the scenarios has to do with the trajectory of the carbon cap which declines linearly with time. Emissions tend to follow the carbon cap until 2045 and then do not continue declining, as there are no other opportunities for GHG reduction, given available technology options. The distribution of emissions into end-use sectors is the same as GHG-Step.

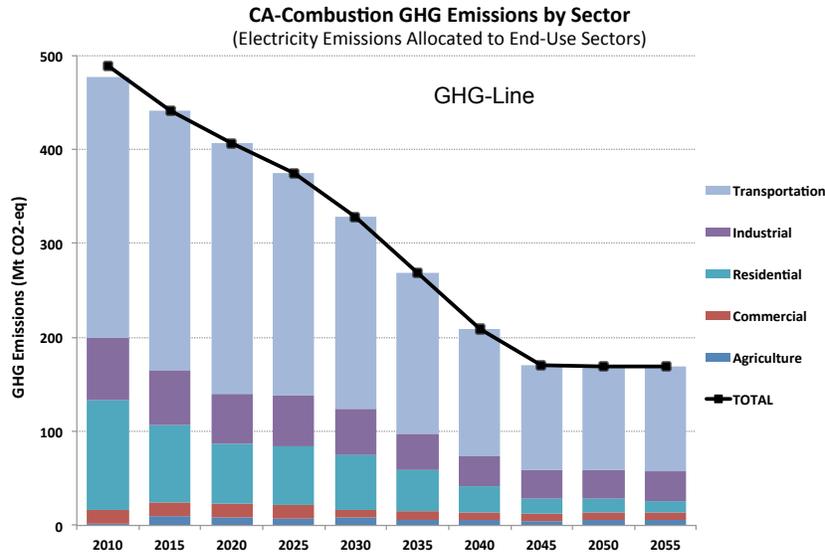


Figure 6.3. Instate GHG emissions from 2010 to 2055 by sector for the 80% GHG reduction Linear scenario (GHG-Line).

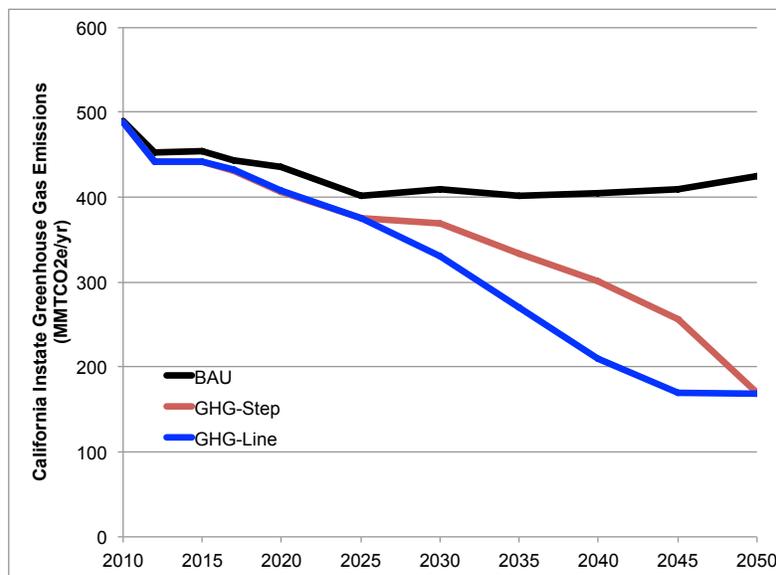


Figure 6.4. Comparison of Instate GHG emissions for the three primary CA-TIMES scenarios.

Figure 6.4 shows a comparison of the emissions trajectory of the three primary scenarios. While both GHG scenarios achieve the same emissions level in 2050, they do so with different paths and thus have different levels of cumulative emissions. Cumulative emissions for BAU are approximately 17.3 GTCO₂e from 2010 to 2050 while the cumulative emissions of GHG-Step and GHG-Line are 14.3 and 12.9 GTCO₂e respectively. There is a difference of approximately 1.4 GTCO₂e between the two GHG scenarios in that 40-year period.

6.1.1 Transportation Sector

To better understand the broader scenario GHG emissions results, it is helpful to delve deeper into individual sectors to understand the shifts in technology choices and fuel and resource usage that drive these changes. The first sector of interest is the transportation sector, and end-use sector that accounts for the largest share of emissions in all of the scenarios (See Figures 6.1 through 6.3). As a result, the transportation sector is one of the most important sectors in CA-TIMES and is modeled with endogenous technology investment and fuel choice decisions.

Transportation demand (VMT, passenger miles and freight ton-miles) is expected to increase slightly (as discussed in Section 4.1) based upon projections from EMFAC2011 (CARB 2011) in BAU. However, these travel demand trends are opposed by increasing efficiency in vehicles (especially light-duty) such that total fuel demand from the transport sector is only slightly higher in the Reference scenario in 2050. **Figure 6.5** shows that total BAU transportation fuel demand is only 17% higher in 2050 relative to 2010 (4120 PJ vs. 3500 PJ or 31 billion gallons of gasoline equivalent (GGE) vs. 24 billion GGE). Starting in 2015 there is an increasing amount of biofuels used (including ethanol, biodiesel, bio-RFO and bio-jet). Total biofuel usage in 2050 is approximately 8x the biofuel usage in 2010, with significant growth in ethanol, biodiesel, bio-RFO and bio-jet. This shift in biofuels usage is driven in part by technology cost reductions in biofuel production and by increasing costs of oil imports. However, petroleum based transport fuels still make up the majority of transportation fuels (95% in 2010 and 63% in 2050).

There is a modest decline in the use of gasoline and ethanol (11%), even with increasing travel demand, due to improved efficiencies in light-duty cars and trucks. Light-duty on-road fuel economy is driven by the new federal fuel economy standards which mandates a doubling of light-duty fuel economy to 2025. Test-cycle fuel economies for the light-duty vehicle fleet achieves approximately 47 mpg, which roughly translates to on-road values of 38 mpg.

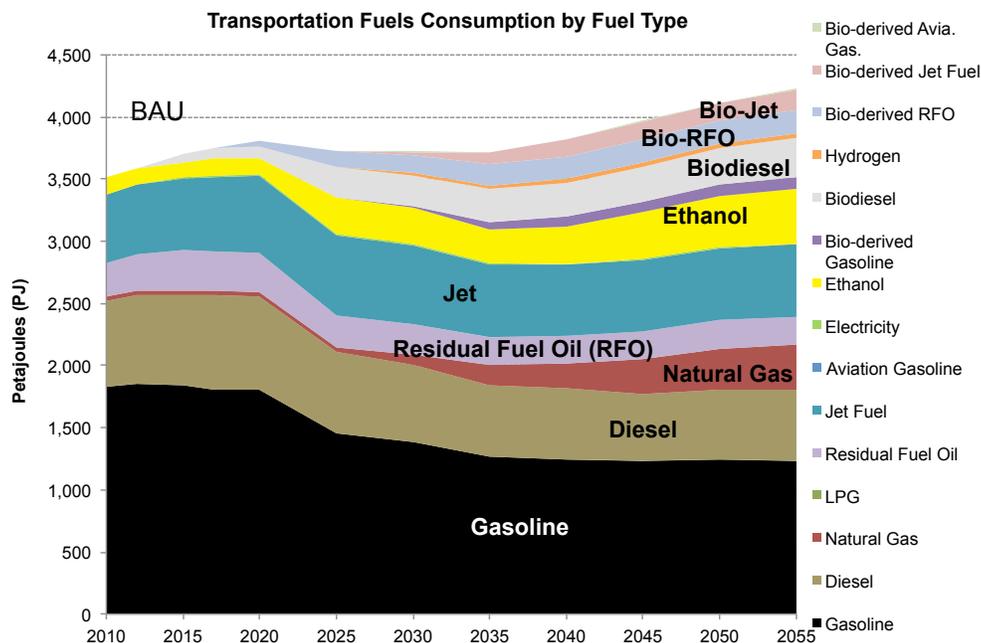


Figure 6.5. Transportation fuel consumption in Reference (BAU) scenario

Figures 6.6 and 6.7 show the transportation fuel demand in the GHG-Step and GHG-Line scenarios. In these scenarios, VMT is reduced by 24% in light-duty, and 10% in medium- and heavy-duty sectors relative to the BAU transport demands. Also important is the assumption that cars make up a greater share of light-duty vehicles in the GHG scenarios than in the BAU scenario (75% in GHG scenarios vs. 54% in BAU scenario). These two factors along with shifts in technology modeled within TIMES account for the reductions in fuel demand. Total fuel demand in 2050 is ~2600 PJ or 19.6 billion GGE. Note that this fuel demand includes inter-state and international marine and aviation fuel demands.

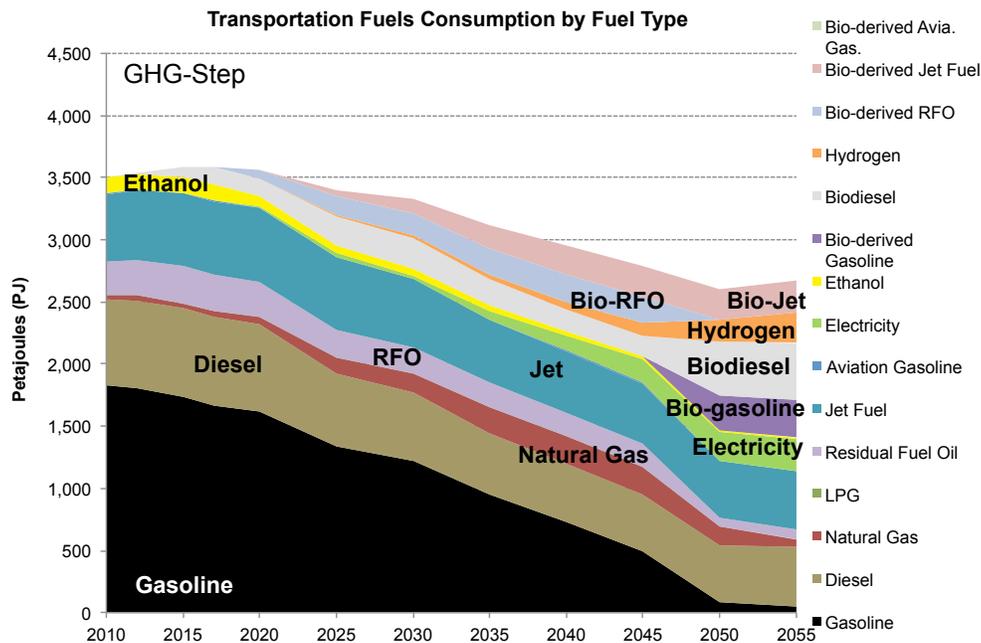


Figure 6.6. Transportation fuel consumption in 80% GHG step reduction scenario (GHG-Step)

Both scenarios look remarkably similar in 2050 but differ somewhat in the timing of introduction and growth of alternative fuels. Gasoline is entirely gone in 2050 as light-duty vehicles shift to electric drive vehicles. Diesel declines slightly but is still needed in heavy and medium duty trucks. Biofuels grow significantly to make up 38% of fuel use in 2050, while petroleum-based fuels account for approximately 40% of 2050 fuel use. The remainder comes from natural gas (6%), hydrogen (7%) and electricity (9%). These remaining petroleum fuels are a significant reason that the two GHG scenarios do not meet the 80% reduction target, as the sum of these emissions makes up the bulk of the transportation GHG contribution (110 MMTCO_{2e} in 2050 vs. the target of 90 MMTCO_{2e}). This is primarily due to the lack of sufficient biofuels (and in particular diesel and jet fuel substitutes) to replace these petroleum fuels.

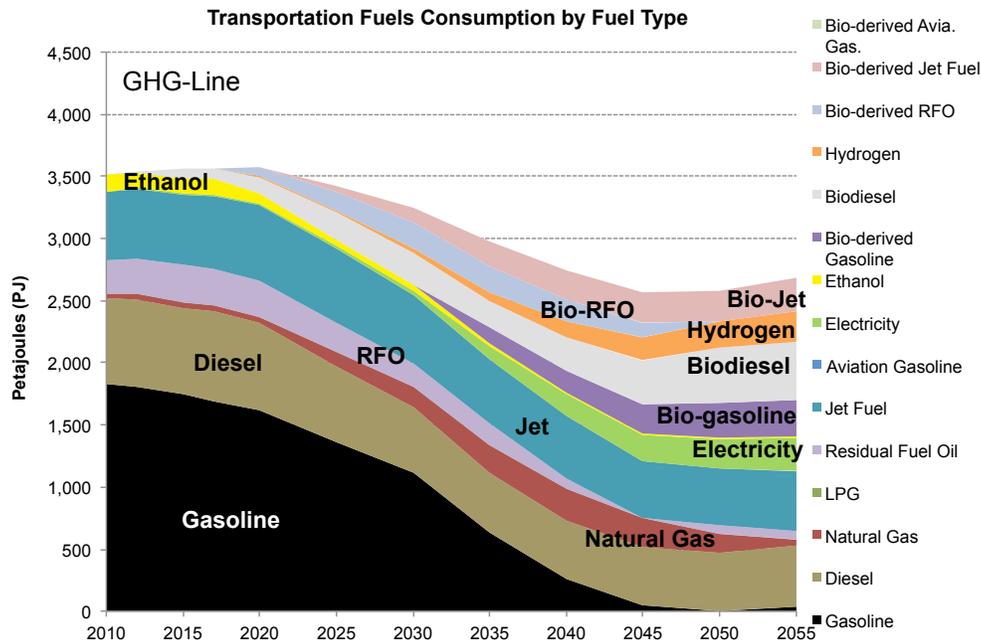


Figure 6.7. Transportation fuel consumption in 80% GHG linear reduction scenario (GHG-Line)

The difference between the two GHG scenarios has to do with the timing of growth of alternative fuel. Given the more stringent cap in intermediate years for the GHG-Line scenario, alternative fuels are introduced earlier and necessarily grow faster than in the GHG-Step scenario. For example, gasoline is phased out later in GHG-Step while bio-based gasoline is introduced earlier in GHG-Line. The same is true for the switch between RFO and bio-RFO, and to a lesser extent between Jet and bio-Jet fuels and diesel and biodiesel.

Overall the carbon intensities¹⁴ of transportation fuels decline by 14% (to 72g/MJ) in the Reference scenario vs. around 39% (to 51g/MJ) in the GHG scenarios (see Figure 6.8). The earlier timing of the shifts towards lower carbon intensity biofuels in the GHG-Line scenario relative to the GHG-Step scenario is also shown in the figure.

¹⁴ Note that these carbon intensity values are based upon the higher heating value of the fuel and do not include all life-cycle emissions such as direct or indirect land-use change.

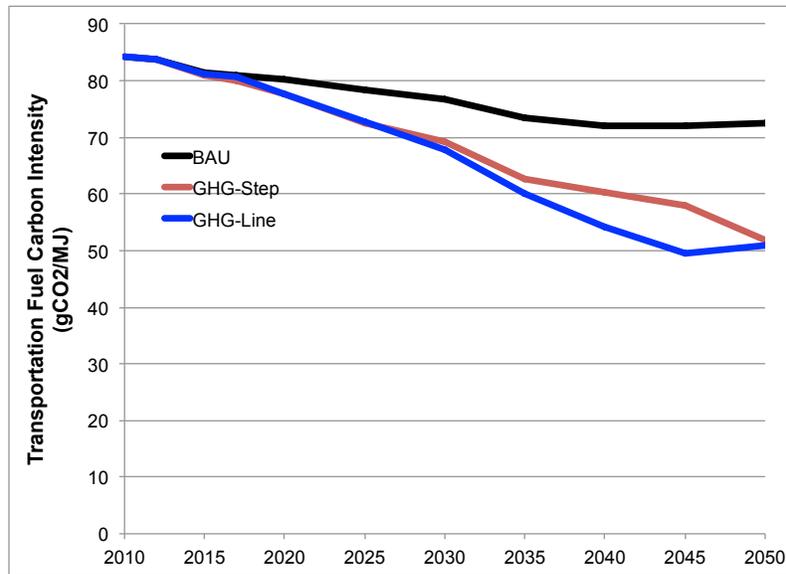


Figure 6.8. Comparison of the carbon intensity of transportation fuels in the three primary CA-TIMES scenarios.

Figure 6.9 shows the light-duty vehicle fleet mix contributions to VMT in the Reference scenario. The results show that light-duty vehicles continue to rely primarily on internal combustion engines and liquid gasoline-like fuels. Conventional gasoline vehicles decline significantly. The bulk of vehicles consist of Flex Fuel Vehicles (FFVs) in 2030 and beyond that are essentially conventional internal combustion engine vehicles with a slight modification to allow them to use up to 85% ethanol. Figure 6.5 shows that ethanol consumption is modest (about 33% of gasoline on an energy (HHV) basis, which is equivalent to E33 if they were exclusively blended), but FFVs are quite low cost and allow the vehicles to run on any blend of gasoline and ethanol, overcoming any “blend wall” issues that limit ethanol in conventional gasoline vehicles. Battery electric vehicles (BEVs) represent a small proportion of vehicles in 2020 to 2040 (about 2-3% of vehicles), while fuel cell vehicles (FCVs) grow to about 5% of vehicles in 2050. These vehicles are chosen primarily because they satisfy the ZEV mandate. It is important to reiterate that the current iteration of the CA-TIMES model does not represent consumer heterogeneity in LDV purchases and as such, because BEVs, PHEVs and FCVs are not the least cost vehicles (accounting for vehicle purchase, fuel costs and including hurdle rates), they are not chosen except when required to meet a constraint (in this case, the ZEV mandate).

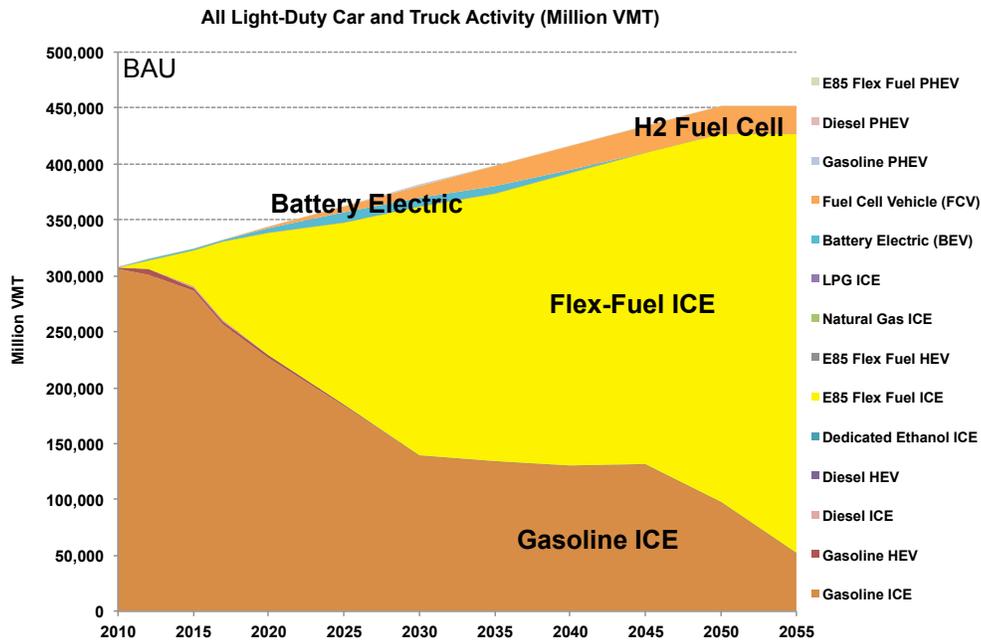


Figure 6.9. Light-duty vehicle VMT by vehicle type in Reference (BAU) scenario

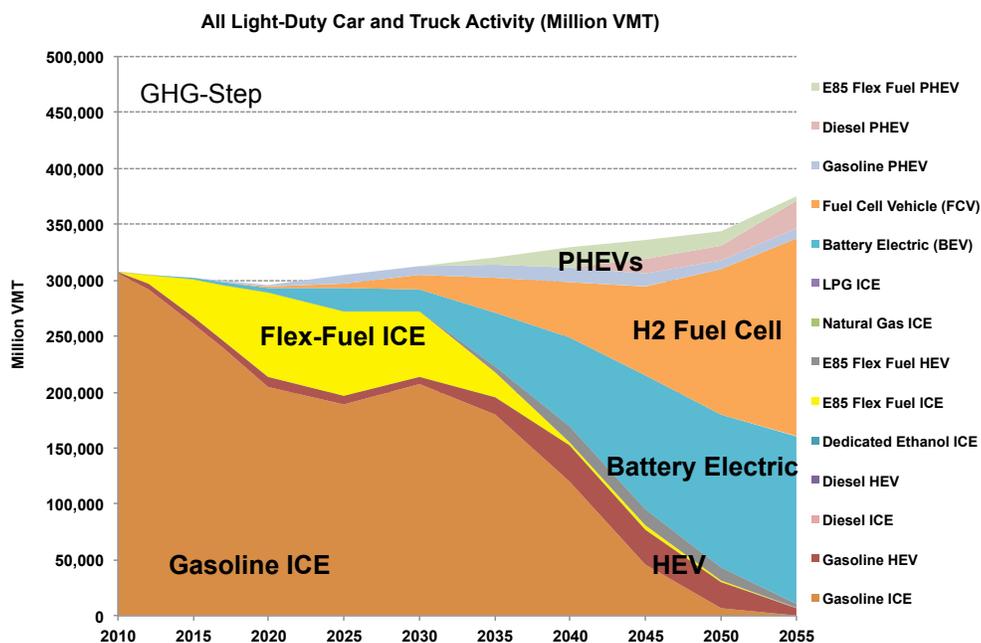


Figure 6.10. Light-duty vehicle VMT by vehicle type in 80% GHG step reduction scenario (GHG-Step).

Figure 6.10 shows the mix of light duty vehicles for the GHG-Step scenario. We see a dramatic shift in the vehicle mix as after 2020 there is significant growth in battery electric vehicles (BEVs) and hydrogen fuel cell vehicles (FCVs). Also shown is some use of plug in hybrid electric vehicles. One of the model assumptions is that all plug-in vehicles can have a maximum share of 50% and that BEVs, specifically,

can only have a maximum share of 40%, due to limitations on the availability of home-based recharging infrastructure. These vehicles reach these maximum shares (BEVs 40% and PHEVs 10%). The contribution of FCVs starts slowly due to the challenges of hydrogen refueling station and vehicle deployment and represented in the model as high early costs. However, after 2030, FCVs grow rapidly to approximately 38% of the fleet due to competitive costs (approximately \$5000 more than gasoline cars/trucks), high efficiency and low carbon hydrogen (made from natural gas, biomass and electrolysis). Other low-carbon options for hydrogen production like fossil with CCS is not an option and electrolysis is limited due to limits on the supply of renewable electricity. Internal combustion engine vehicles still make up about 12% of the vehicle fleet in 2050.

In the linear GHG scenario, the 2050 fleet share for PHEVs and BEVs is the same as in the GHG-Step scenario (Figure E.1 in Appendix E). Hydrogen vehicles grow to 45% of the fleet and there is a faster phase out of gasoline vehicles and substitution with gasoline hybrid vehicles, which make up 5% of the fleet in 2050. The GHG-Line scenario has a faster deployment of hydrogen vehicles and as a result, they make up a greater portion of the fleet in 2050 and offset a greater number of ICE vehicles.

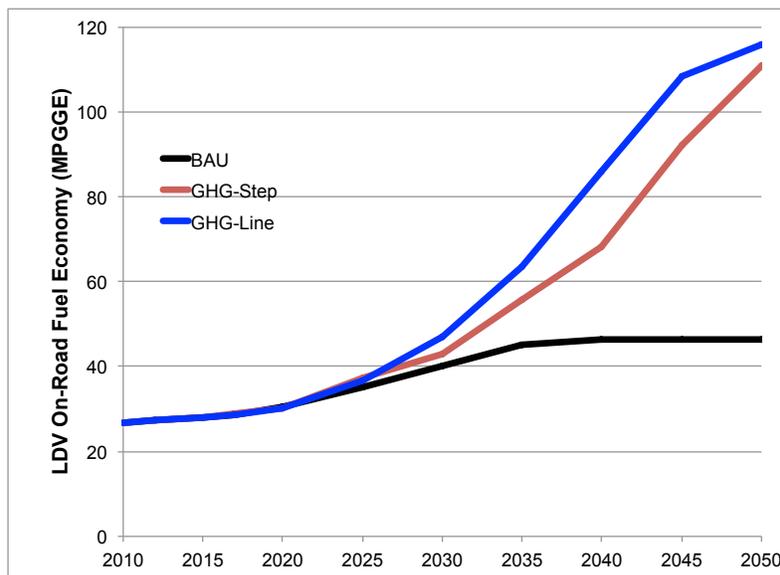


Figure 6.11. Comparison of light-duty vehicle fleet fuel economy (on-road) for the three primary scenarios.

Figure 6.11 shows how the fleet fuel economy differs between the three scenarios. The Reference scenario achieves 46 mpg on-road for LDVs which tracks the updated CAFE standards to 2035. LDVs in the GHG-Step scenario achieve 111 mpg in 2050, while the GHG-Line achieves a slightly higher fleetwide fuel economy of 116 mpg, as well as moderately higher fleet fuel economy in 2030 to 2045 due to faster growth in of hydrogen fuel cell vehicles and slightly higher share of gasoline hybrids.

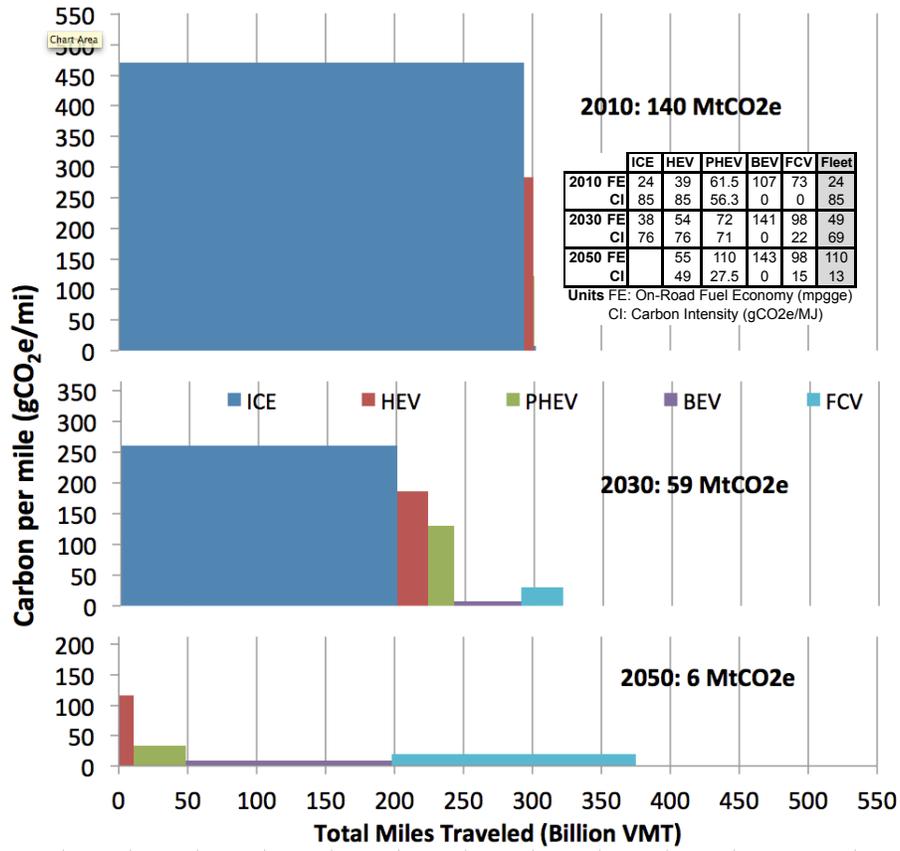


Figure 6.12. Comparison of the carbon per mile and miles traveled for different vehicle types and total emissions from LDVs in 2010, 2030 and 2050 for the GHG-Step scenario.

Figure 6.12 shows the carbon per mile for different vehicle types in different years for the GHG-Step scenario. The carbon intensity of fuel (gCO₂/MJ) is multiplied by the fuel consumption (MJ/mile) to obtain the carbon per mile (gCO₂e/mile) on the y-axis. The number of miles that vehicle travels is on the x-axis and the product of these two factors (i.e. area of a given colored block) is the total GHG emissions from a given vehicle type. The sum of areas of all blocks gives the total GHG emissions from LDVs. Light-duty is pretty much decarbonized in 2050 only emitting only 6 MMTCO₂e with the emissions coming from the liquid fuel consumption for PHEVs and HEVs, and production of hydrogen for fuel cell vehicles (mostly from natural gas).

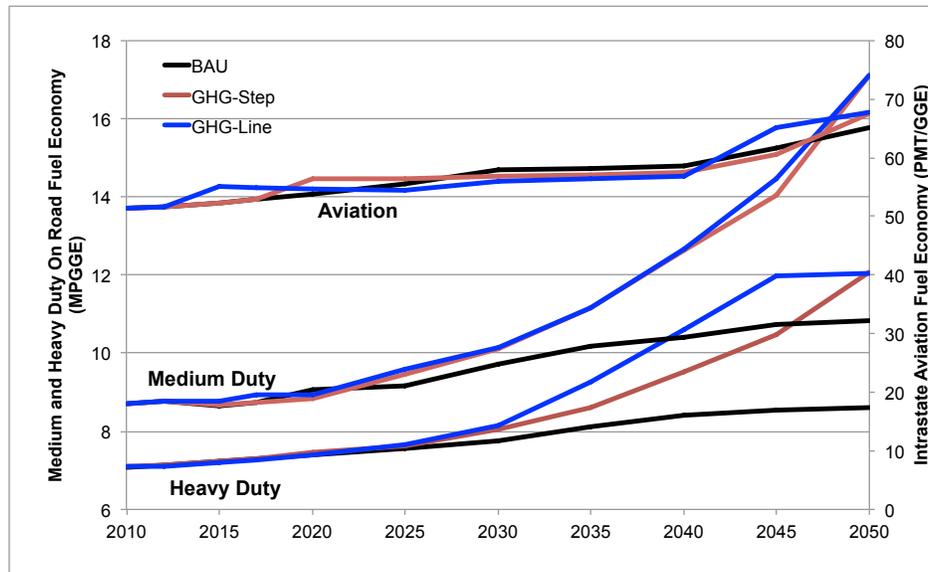


Figure 6.13. Comparison of the fuel economy in heavy-duty and medium-duty trucks and intrastate passenger aircraft for three primary scenarios.

In other transportation sub-sectors, the GHG scenarios show significant increases in vehicle efficiency relative to the Reference scenario. Heavy-duty vehicles can achieve approximately 12 mpgge in the GHG scenarios in 2050 vs. around 7 mpgge in 2010. The Reference scenario shows only a modest increase in heavy-duty truck efficiency by 2050 (to 8.6 mpgge). The significant increase in heavy-duty efficiency in the GHG scenarios is due entirely to adoption of more costly and high-efficiency diesel trucks.

In the medium duty truck subsector, there is greater potential for efficiency improvements with the potential adoption of hydrogen and plug-in hybrid vehicles. Efficiency improves from 9 mpgge in 2010 to approximately 17 mpgge in 2050 in the GHG scenarios (vs. 11 mpgge in the Reference scenario). CNG also makes up a small fraction (7%) of the medium duty vehicle fleet in 2050.

In the aviation subsector, the difference in efficiency improvement between the Reference and GHG scenarios is not that great. For example, intrastate passenger aircraft has a fuel economy of 51 passenger miles/gge in 2010. There is a steady increase in aircraft efficiency such that by 2050, the fuel economy is 65 pass-mi/gge for the Reference scenario and 68 pass-mi/gge for the two GHG scenarios.

6.1.2 Commercial, Residential, Industrial and Agricultural Sectors

This section details the other end-use sectors (commercial, industrial, residential and agricultural), which contribute about 40% of emissions in 2010 and about 30% in 2050 in the GHG scenarios.

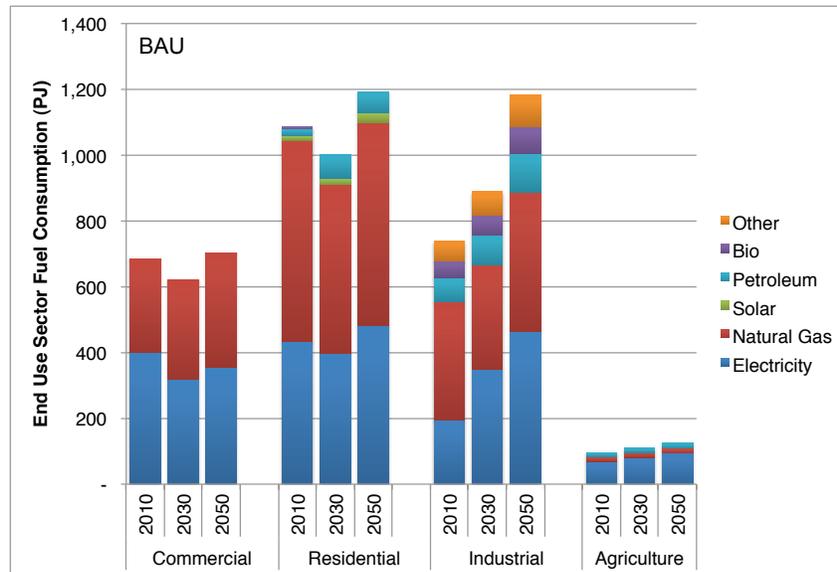


Figure 6.14. Final energy (fuel) demands for commercial, residential, industrial and agricultural sectors in the Reference scenario.

Figure 6.14 shows the final energy demands for these end-use sectors in 2010, 2030 and 2050. The industrial and agricultural fuel demands are input assumptions to the model (as described in Sections 4.4 and 4.5) while the fuel demands for the commercial and residential sectors are endogenously determined within the model via choices about different technologies. In the GHG scenarios, the industrial and agricultural sectors are assumed to be more efficient and also shift final energy usage to a greater proportion of electricity use (see Sections 4.4 and 4.5).

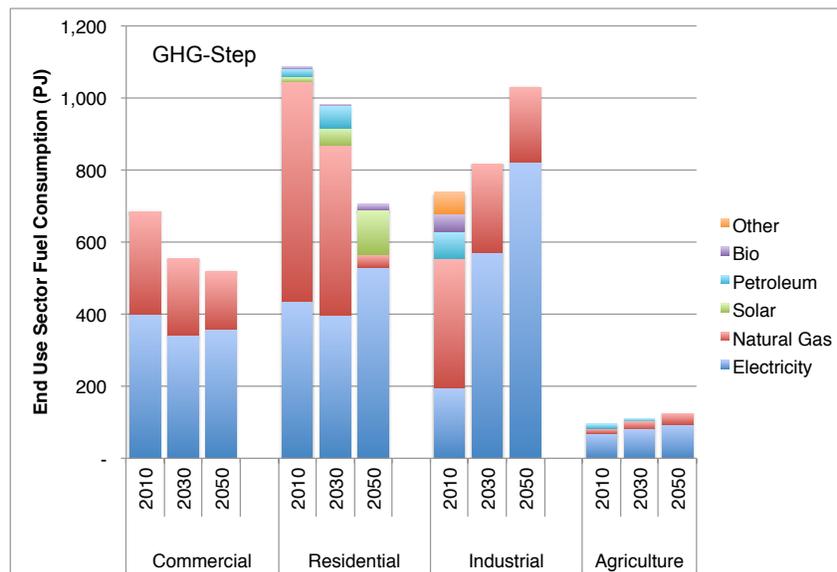


Figure 6.15. Final energy (fuel) demands for commercial, residential, industrial and agricultural sectors in the GHG-Step scenario.

In Figure 6.15, the energy use in the commercial and residential sectors for the GHG-Step scenario is quite different than the BAU scenario. The mix of fuels used is shifted (the share of electricity rises) and the total energy demand is reduced. Given the rise in commercial floorspace and residential household

population increase, electrification and efficiency are used to counteract the increase in total energy services in these sectors. From 2010 to 2050, commercial final energy use declines by 25% while the share of electricity rises from 59% to 69%. Residential final energy use declines by 35% and electricity's share of final energy rises from 40% to 75%. Solar (for water heating) is also used significantly in 2050 (17% of residential energy use).

Figure E.2 in Appendix E shows the energy usage for the commercial, residential, industrial and agricultural sectors in the GHG-Line scenario. The industrial and agricultural sectors are identical to the GHG-Step scenario as are the 2050 energy use and final energy split for the commercial and residential sectors. However, because the carbon caps in the intermediate years are different, the energy use, final energy mix and system efficiency are different. In 2030, GHG-Step has higher final energy use in the commercial sector than GHG-Line (by 6%) while the residential sector energy use in GHG-Step is 2% higher.

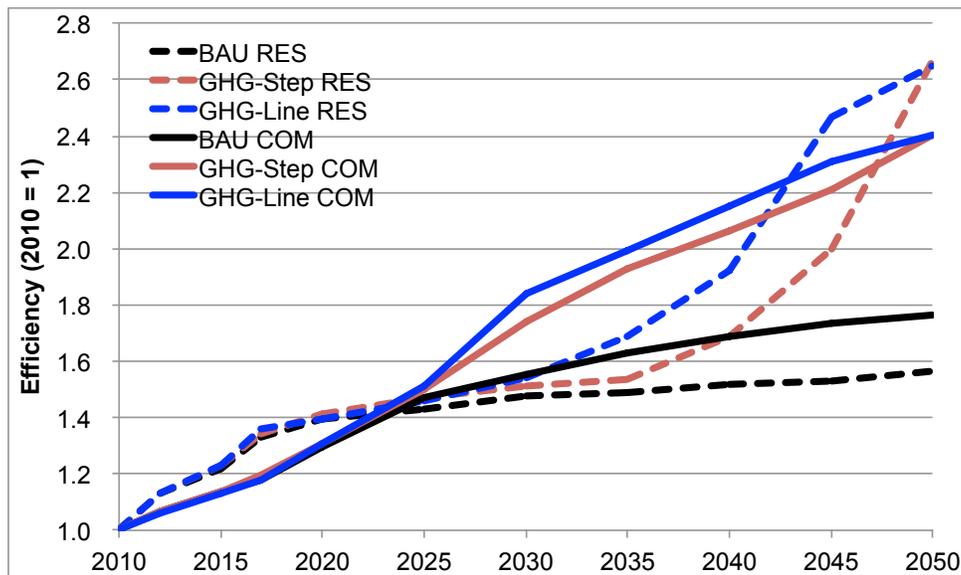


Figure 6.16. Indexed weighted efficiency in the residential and commercial sectors in the three primary scenario.

Figure 6.16 shows the efficiency improvement of the residential and commercial sectors in the three primary scenarios. The Reference scenario shows substantial improvements from 2010 to 2050 (a factor of 1.8 in the commercial sector and 1.6 in the residential sector). The GHG scenarios show even greater efficiency improvements by 2050 (2.7x in the residential sector and 2.4 in the commercial sector). The biggest contributors to the sectoral efficiency improvements are seen in commercial and residential heating (i.e. heat pumps) and lighting (i.e. LED).

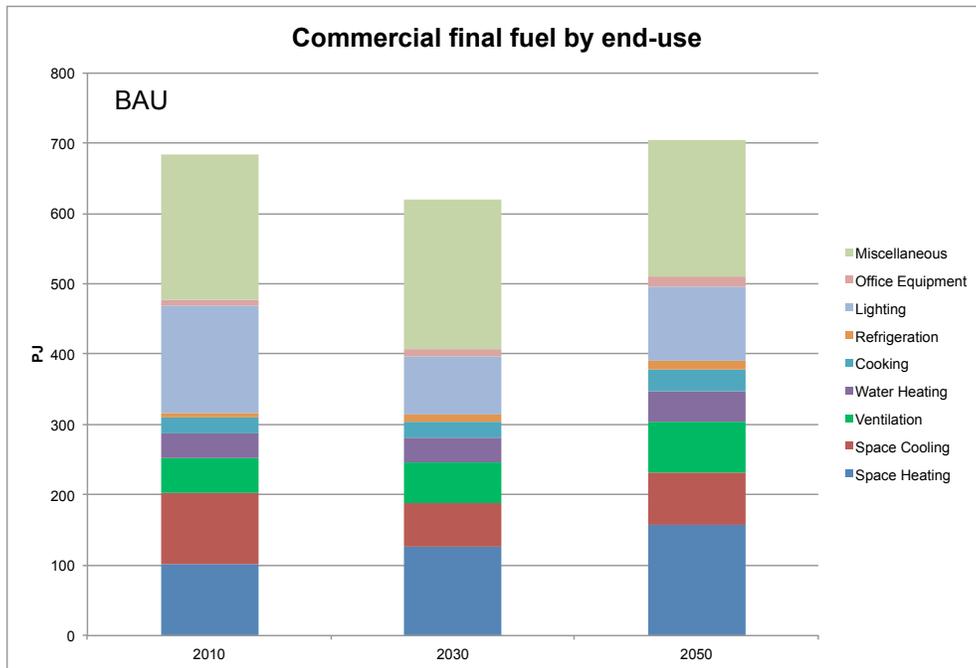


Figure 6.17. Commercial sector final energy use by energy services in the Reference (BAU) scenario

Figures 6.17 and 6.18 show the final energy usage by energy service within the commercial and residential sectors for the Reference scenario. We can see that the biggest demands for energy in the commercial sector are space heating, space cooling, lighting and miscellaneous. Service demand is growing for these energy services because of growth in commercial floorspace (67% growth between 2010 and 2050). CA-TIMES does not model any improvements/reductions in miscellaneous energy usage. The largest service demands for the residential sector are space heating and water heating.

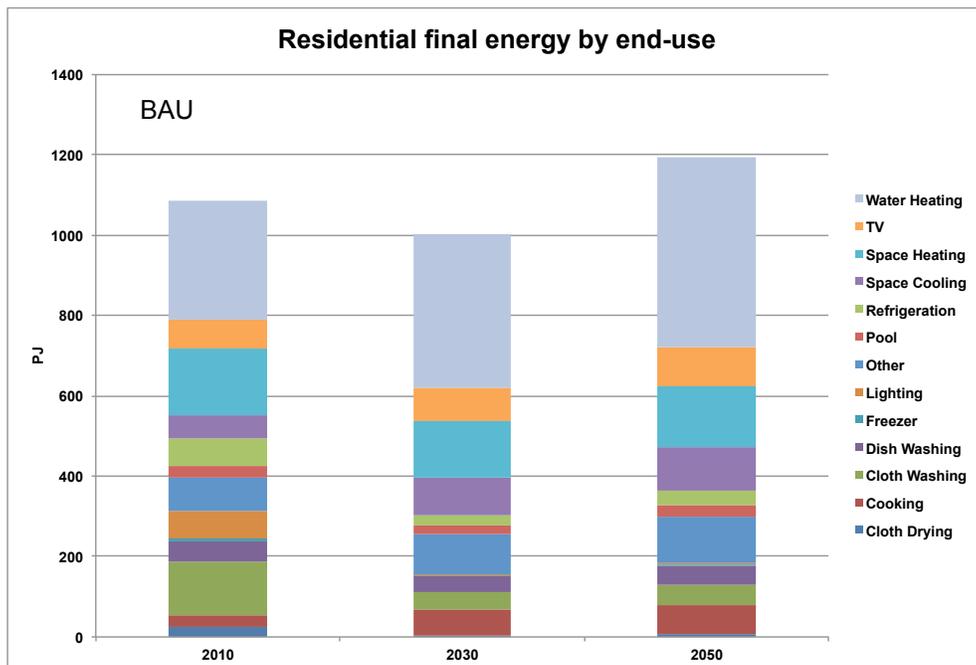


Figure 6.18. Residential sector final energy use by energy services in the Reference (BAU) scenario

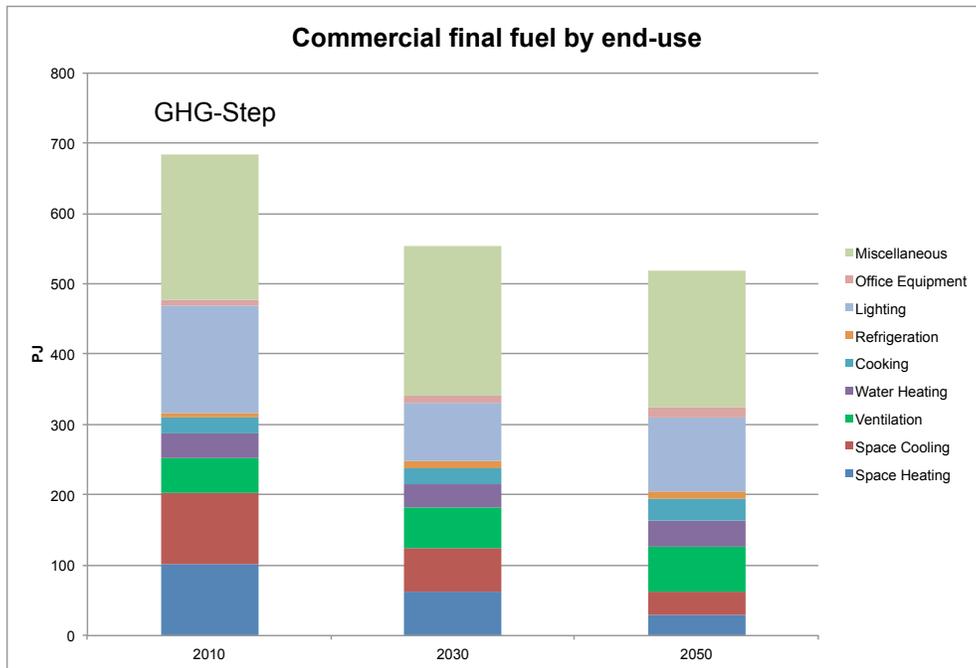


Figure 6.19. Commercial sector final energy use by energy services in the GHG-Step scenario

Figures 6.19 and 6.20 show the commercial and residential final energy use broken out by energy service for the GHG-Step scenario. There are large reductions in energy use in the commercial sector in space heating, space cooling, and lighting energy. Again, miscellaneous is a large portion of the final energy use in the commercial sector because technology/efficiency changes are not modeled for this service.

Residential sector energy services which show large energy use reductions are water heating, lighting, space heating and clothes washing. Many other energy services do not show any significant reductions in energy use, such as TV, space cooling, cooking and other.

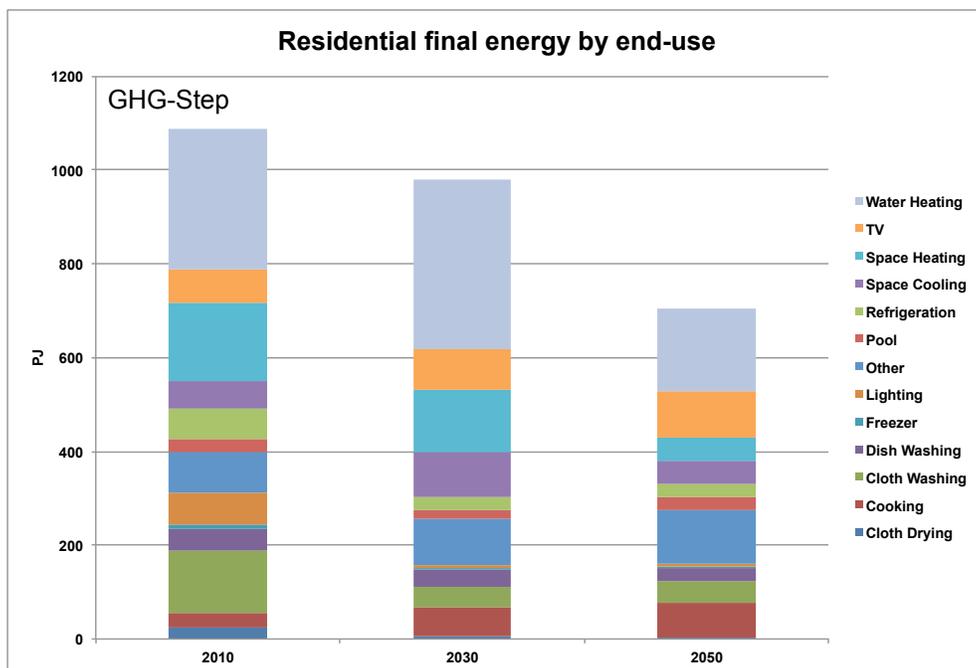


Figure 6.20. Residential sector final energy use by energy services in the GHG-Step scenario

6.1.3 Electric Sector

The last two sections described the changes in final energy use and technology adoption within the end-use sectors. These next two sections describe the energy supply sectors that provide electricity and fuels to the end-use sectors.

Electricity is a critical component of the energy supply mix and major changes to generation and demand are essential in meeting the 80in50 targets. Decarbonizing the electric sector is critical in reducing the state’s emissions, because one of the key strategies for reducing emissions is shifting fossil fuel usage from petroleum and natural gas to electricity in end use sectors. As electricity demand rises as a result of this electrification, the sector must also re-invest in low carbon technologies. Cost reductions in renewables and other low carbon source makes it feasible to achieve low carbon intensity at reasonable costs.

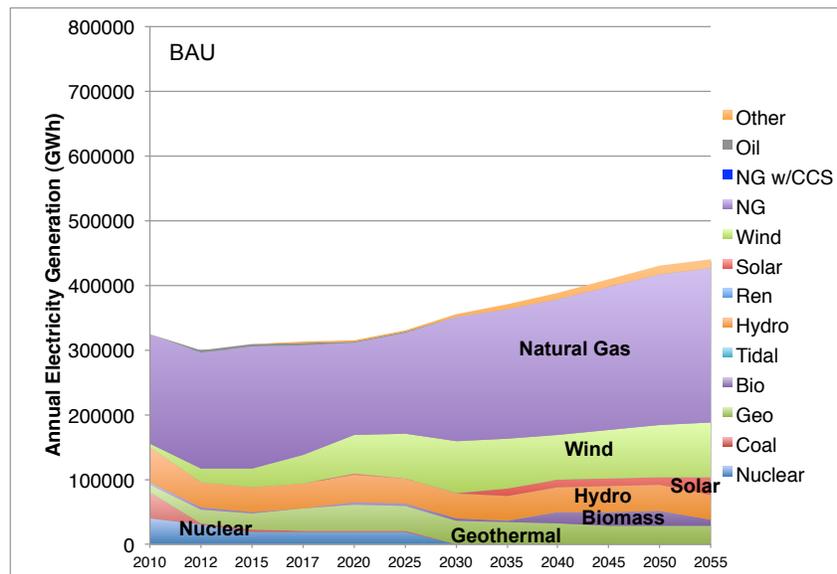


Figure 6.21. Electricity generation by resource type in the Reference (BAU) scenario

Figure 6.21 shows the annual electricity generation mix from 2010 to 2050 in the Reference scenario. Overall electricity usage climbs from 333 TWh to 430 TWh in 2050, a 29% increase. In terms of generation mix, there is a phase out of nuclear due to the closing of San Onofre Nuclear Generating Station (SONGS) in 2013 and then the state’s remaining nuclear plant (Diablo Canyon) in 2025. As modeled, all new generation is assumed to be purpose built for use by California, so the investment, O&M, and other variable costs associated with electricity generation are allocated entirely to the California energy system. Coal imports are phased out and growth in electricity generation comes primarily from renewables. The rapid increase in wind power is due to significant reductions in the cost of wind turbines with much of the generation coming from out of state resources (and associated transmission lines). Wind grows to 80 TWh/yr in 2050, while solar, geothermal and biomass contribute 13, 28 and 24 TWh/yr respectively. Overall, renewables make up 33% of total generation, which is consistent with the state’s RPS, though with large hydro, the renewable percentage is 42%. The largest contributor to the state’s electricity mix continues to be natural gas, which increases generation from 176 TWh in 2010 to 232 TWh in 2050, but remains a bit more than half of all generation throughout the modeling period. There is a small contribution of “Other” generation, which comes from by-product electricity generation in bio-refineries, i.e. cellulosic ethanol plants, pyrolysis and Synfuel (Fischer Tropsh) plants.

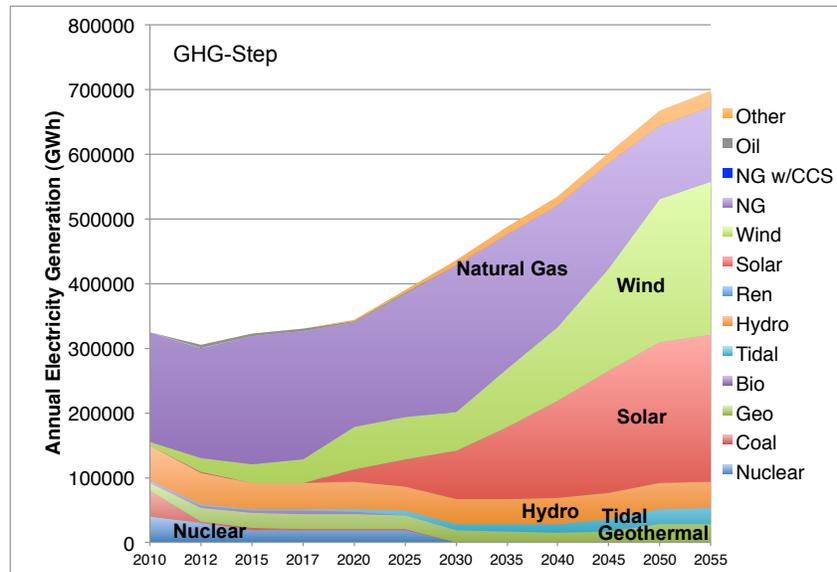


Figure 6.22. Electricity generation by resource type in the 80% GHG Step Reduction Scenario (GHG-Step).

Figure 6.22 and Figure E.3 show the generation mix for the GHG-Step and GHG-Line scenarios. One big difference between these scenarios and the Reference scenario is the large increase in electricity demand that is needed by 2050. Instead of 430 TWh in the Reference scenario, electricity generation in these GHG scenarios is approximately 667 TWh in 2050, approximately 55% more. The only viable option to decarbonize the electricity supply in these scenarios is renewables (since nuclear and carbon capture technologies are not available in these scenarios). Geothermal and tidal generation expand as much as the economically feasible resource allows in 2050 to 28 TWh and 23 TWh respectively. Solar and wind power make up the bulk of the generation in 2050, with utility scale solar thermal, solar PV and wind contributing 128 TWh, 90 TWh and 221 TWh respectively. The installed capacity for solar thermal, solar PV and wind generation are 54, 49 and 74 GW, respectively. Notable is the lack of biomass-based electricity generation in the GHG scenarios since these energy resources are used to make biofuels (which is discussed in subsequent sections). Renewable contributions to electricity generation are 73% when excluding hydropower (i.e. only RPS eligible generation) and 80% when including hydropower. Another 3% comes from excess electricity generation from bio-refineries. The remaining 17% comes from natural gas (primarily combined cycle, with some contribution from combustion turbines).

The biggest difference between the two GHG scenarios again has to do with the timing of the ramp up of the low-carbon renewable generation resources. In 2025-2030, when the GHG-Line carbon cap starts to decline relative to the GHG-Step cap, renewable (solar and wind) generation is higher, while natural gas generation is lower.

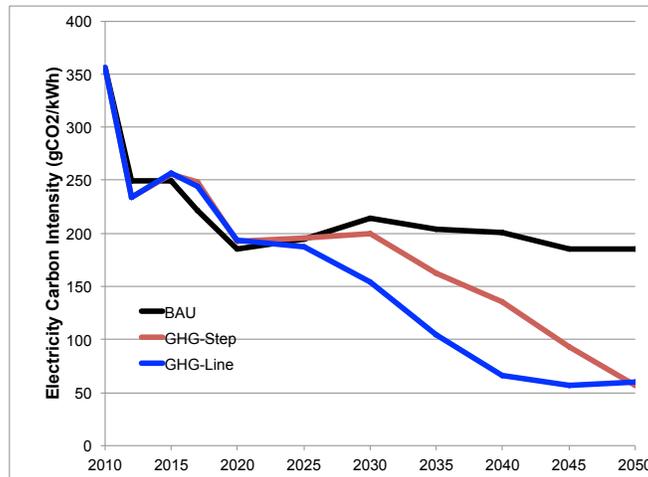


Figure 6.23. Carbon intensity of electricity generation by resource type in three primary CA-TIMES scenarios.

Figure 6.23 shows the carbon intensity of electricity (gCO₂/kWh) for each of the three primary CA-TIMES scenarios. The carbon intensity of the Reference scenario declines to around 200 g/kWh in 2020 and more or less constant to 2050 (184 g/kWh), while the two GHG scenarios decline to below 60 g/kWh due to the continued use of natural gas generation which makes up 17% of generation.

As noted previously, the CA-TIMES optimization must ensure that supply and demand for electricity are balanced in each of the forty-eight sub-annual timesteps. Thus, the timing of generation from different resources is part of the optimization process for investing in electric power plants of different types (along with policy constraints like RPS). Matching electricity supply and demand is a critical aspect of operating the electricity grid. When introducing significant levels of intermittent renewables, such as wind and solar, it is important to ensure that there is sufficient flexibility in the system to handle the variability. Figure 24 shows the sources of electricity generation by timeslice. Demand is highest in the summer months (July-August), yet that is when wind power generates the least amount of electricity, so it is backed up by natural gas plants.

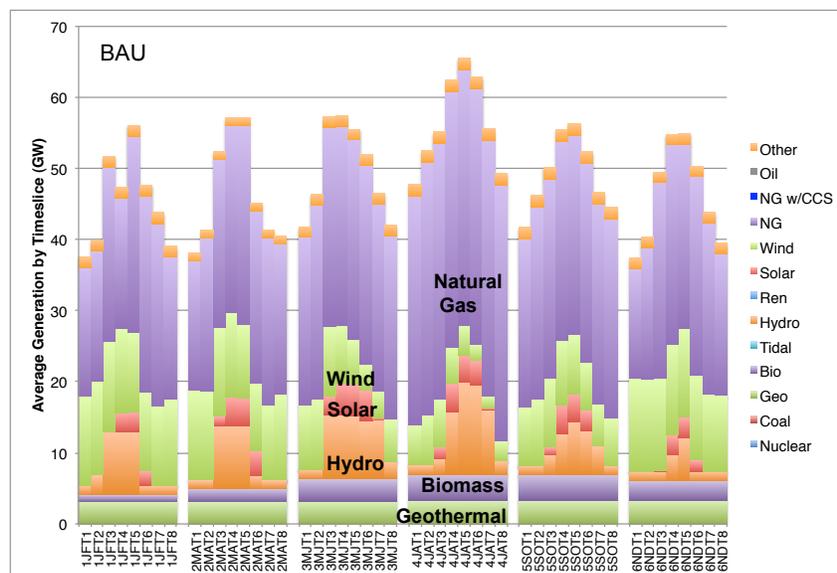


Figure 6.24. Electricity generation by resource type and timeslice in the Reference (BAU) scenario in 2050. See section 3.5.5 for more info on timeslices. JF: January/February; MA: March/April; MJ: May/June; JA: July/August; SO: September/October; ND: November/December. The daily time period is grouped into three-hour time slices. Thus the daily time period 1 corresponds to 12 am-3 am, and so on.

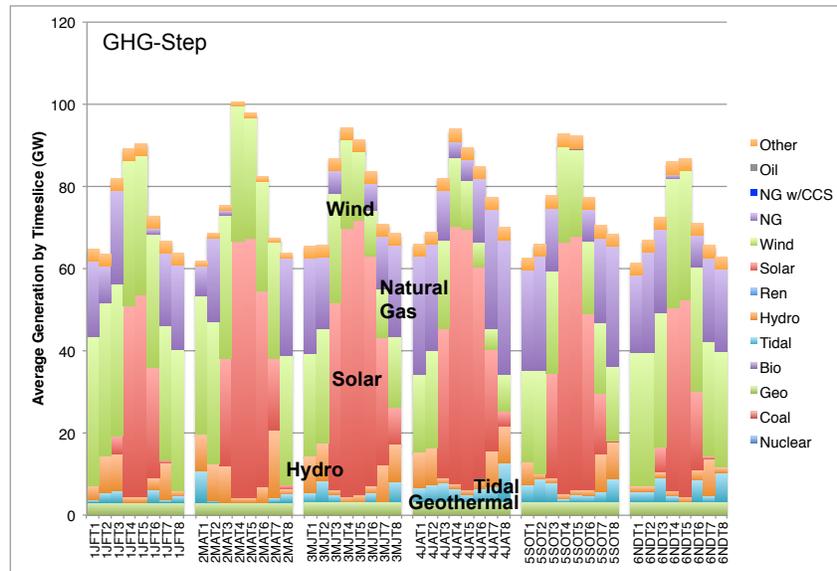


Figure 6.25. Electricity generation by resource type and timeslice for 2050 in the 80% GHG-Step Reduction Scenario (GHG-Step).

Figure 6.25 shows the same timeslice generation for 2050 for the GHG-Step scenario. The penetration of wind and solar is such that on average, intermittent generation makes up more than 66% of timeslice generation, and in many timeslices it can make up more than 90% of total generation. In these GHG scenarios, only hydropower and natural gas generation are available for dispatchable, responsive generation, while the remainder of generation assets are either intermittent renewables or must-run baseload power. This can present challenges to the operation of the grid in terms of balancing supply and demand, frequency regulation, having sufficient spinning reserves and ensuring system reliability. One interesting point to note is that the summer generation peak is non-existent and we actually see peak demand occurring in the spring (March April) when both wind and solar output is high. Figure E.4 shows the same graph but for the GHG-Line scenario. These two GHG scenarios are quite similar in terms of the timeslice generation in 2050.

6.1.4 Fuels Supply Sector

Section 6.1.1 discussed the transportation fuel mix in the three primary CA-TIMES scenarios and Section 6.1.2 showed the fuel use for the different end-use sectors (residential, commercial, industrial and agricultural). This section will further discuss the energy supplies used throughout the energy system and the processes used to deliver the final fuels.

Biomass and biofuels are major areas of interest when discussing reducing greenhouse gas emissions with low carbon fuels.

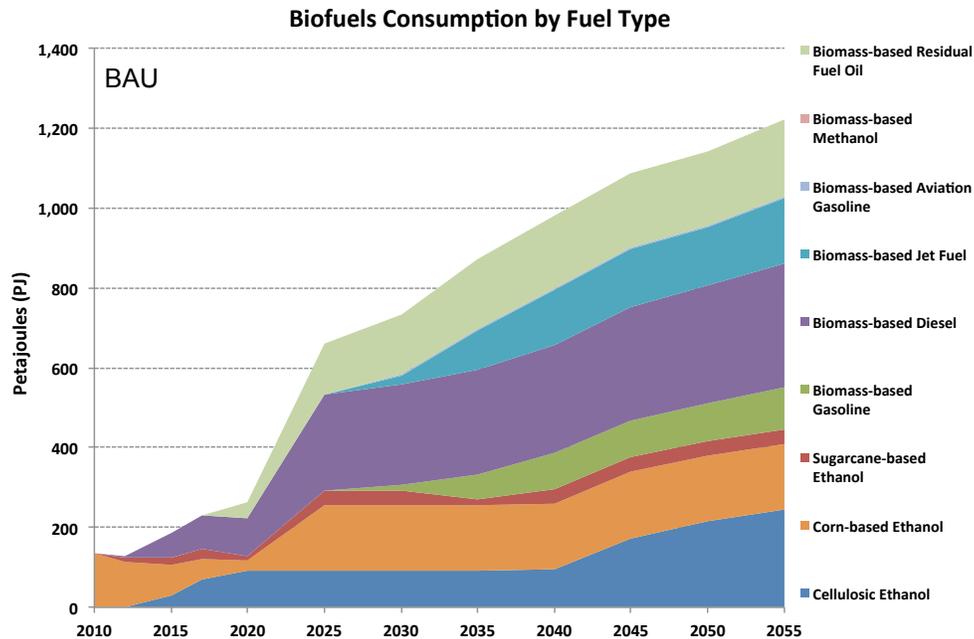


Figure 6.26. Annual biofuel production by category for the Reference (BAU) scenario.

Figure 6.26 shows the significant growth in biofuels production in the BAU scenario. Even though there isn't a carbon cap, the rising price of oil (up to \$180/bbl in 2050) prompts a shift towards substitute liquid fuels. Biofuel consumption is 1140 PJ or 8.7 billion gallons of gasoline equivalent (BGGGE). However, not all of this fuel is low carbon (14% is corn-based ethanol). Biomass utilization is approximately 1700 PJ in 2050.

Figures 6.27 and E.5 show the biofuels production in the GHG scenarios. Interestingly, these two scenarios have slightly lower biofuel production than the BAU scenario (in 2050, the GHG scenarios have approximately 1015 PJ of biofuels (~7.7 billion GGE) compared with 1140 PJ for BAU). The mix of biofuels is somewhat different between the BAU and GHG scenarios. The BAU scenario has a significant amount of gasoline substitutes (ethanol and bio-gasoline), comprising 43% of all biofuels production in 2050. In the GHG scenario, gasoline substitutes account for less than 30% of fuels production. The remainder of biofuels production is used as diesel and jet fuel substitutes. This is due to the extent of electrification that is found in the light-duty sector. The primary users of gasoline (and ethanol) are heavy duty trucking and aviation, which cannot be electrified as easily.

And again, these two scenarios look identical in 2050 but differ with respect to the trajectory of fuels production in the intermediate years. In the GHG-Step scenario, biofuel production ramps up quite significantly in 2045 to meet the 2050 goal, though this rate of production increase may be unrealistic.

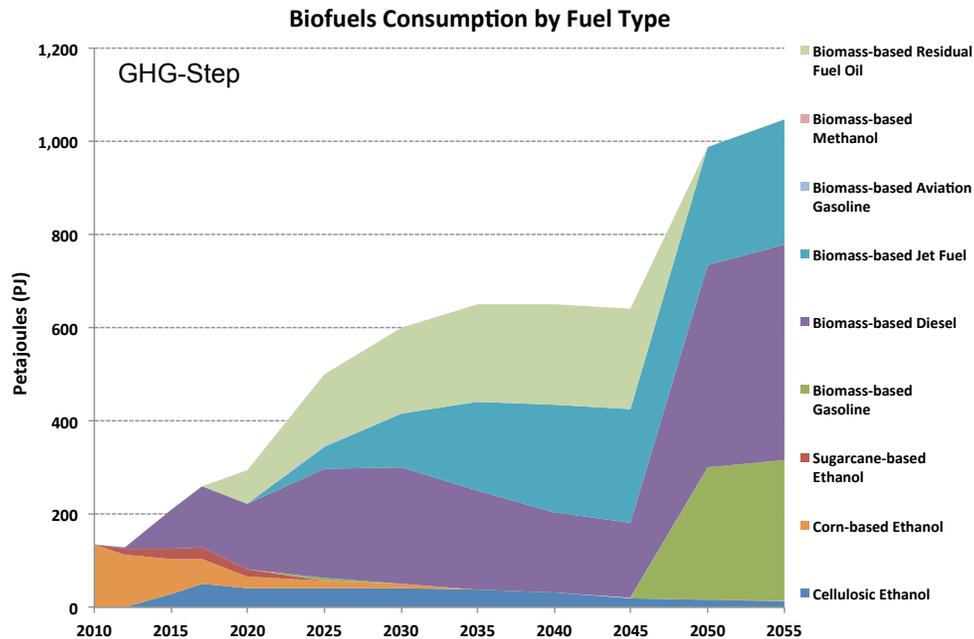


Figure 6.27. Annual biofuel production by category for the 80% GHG-Step Reduction Scenario (GHG-Step).

Figure 6.33 shows the annual share of different primary energy resources used in the Reference scenario. Even without a cap on carbon, we see a drop in the reliance on fossil fuel resources from around 90% in 2010 to approximately 70% in 2050. Oil represents the resource that loses the most share (from 57% to 32%) from 2010 to 2050, corresponding to the rising price of oil and the availability and cost reductions for many efficient transportation technologies. Biomass makes up for the reduction in petroleum usage by growing from approximately 1% of primary energy usage to around 18%. Other resources that are growing are wind and solar resources (though these are small relative to the growth in biomass usage)¹⁵.

¹⁵ Resources for wind, solar and other renewables that are used primarily for electricity production are calculated based upon electricity production rather than chemical, mechanical or electro-magnetic energy that are inputs to the renewable generator. For example, the electrical output of a solar panel is counted as the primary energy rather than the solar insolation that falls on the panel.

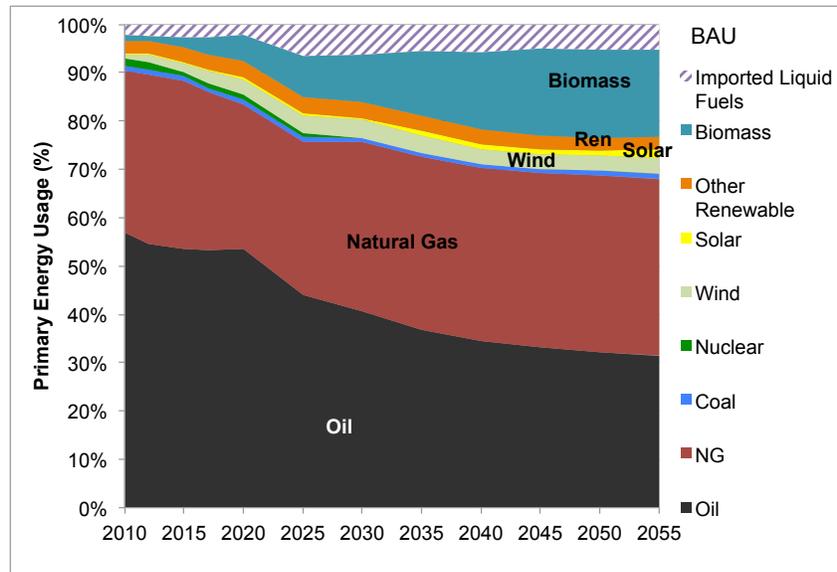


Figure 6.28. Annual share of primary energy resources for the Reference (BAU) scenario.

Figures 6.29 and E.6 show the annual share of primary energy resources for the two GHG scenarios (GHG-Step and GHG-Line). The share of fossil fuels declines to around 49% (oil 30% and natural gas 19%), while renewables (and biomass) grow to make up around 50% of primary energy supply. The shift from fossil fuels to renewables occurs earlier in the GHG-Line scenario than the GHG-Step scenario because of the more restrictive carbon cap between 2020 to 2045.

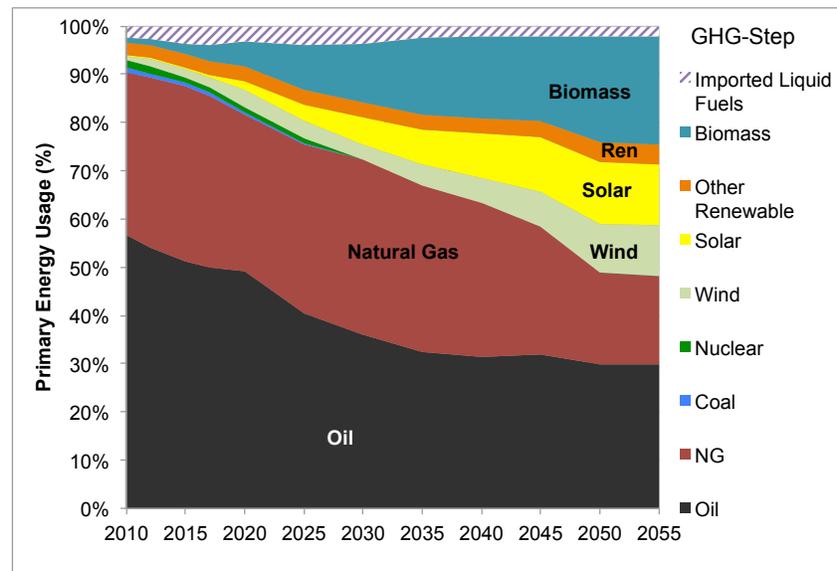


Figure 6.29. Annual share of primary energy resources for the 80% step GHG emissions reduction (GHG-Step) scenario.

6.1.5 Energy System Costs

An understanding of the costs associated with GHG reductions is important. Table 6.1 shows the sum of undiscounted and discounted ($r = 4\%$) annual energy system costs that are accounted for within the CA-TIMES model and the cumulative in-state energy system emissions from 2010 to 2050. A second BAU scenario is added (BAU-LoVMT), which matches the lowered VMT that is assumed in the GHG-Step and

GHG-Line scenarios. This makes for a more convenient comparison with the GHG scenarios since they will have the same energy service demands. The undiscounted total energy system costs from 2010 to 2050 are on the order of 8.3 to 9.9 trillion dollars (or 3.5 to 4.1 trillion dollars in net present value (NPV) with a discount rate of 4%), which includes the cost of transportation vehicles, residential and commercial appliances, power plants, fuel production facilities, fuel transportation and the cost of purchasing or extracting primary energy resources. It does not include any equipment or end-use conversion devices in the industrial or agricultural sectors, but does include the costs of supplying energy (natural gas, electricity, etc.) to those sectors. A breakdown of annualized total costs by sector is summarized in Tables E.1 and E.2 for the BAU and GHG-Step scenarios, respectively. The differences in costs between these GHG and BAU scenarios are on the order of 3-15% across scenarios. Cumulative emissions for these four scenarios range from 12.9 GTCO_{2e} to 17.3 GTCO_{2e}. The differences in cumulative emissions between these GHG and BAU scenarios are on the order of 7 to 18%.

Table 6.1. Summary of undiscounted and discounted (4% discount rate) energy system costs (in 2010\$) and cumulative emissions for primary CA-TIMES scenarios for 2010 to 2050.

	<i>Undiscounted Total Cost (2010 to 2050) \$B</i>	<i>Discounted Total Cost (2010 to 2050) \$B</i>	<i>Cumulative Emissions (2010 to 2050) MMTCO_{2e}</i>
BAU	8,993	3,767	17,256
BAU-LoVMT	8,308	3,502	16,299
GHG-Step	9,384	3,867	14,331
GHG-Line	9,946	4,085	12,932

Table 6.2 shows the differences in costs and emissions between the GHG and BAU scenarios and the average undiscounted and discounted cost per tonne of CO₂ reduced for the GHG scenarios. We compare the costs and emissions reductions for GHG scenarios with two possible BAUs: the primary Reference scenario (BAU) has higher VMT than the BAU-LoVMT scenario, thus in the BAU scenario more vehicles must be purchased to meet the additional VMT demand. When we compare GHG scenarios with BAU-LoVMT, the GHG benefits will be smaller. At the same time, the total energy system costs in the BAU scenario will be higher than in BAU-LoVMT. Thus there are two trends that increase the cost per tonne estimate when comparing to BAU-LoVMT: the numerator is getting larger and the denominator is getting smaller (hence costs go up). In the CA-TIMES model, we treat the LoVMT assumption in the GHG scenarios as an exogenous input and do not estimate the cost associated with VMT reduction. Thus, the cost of reducing emissions (through lower VMT) is implied to be free, whereas in reality, there can be large costs associated with reducing VMT such as infrastructure in supporting walking and bike lanes, public transit systems, etc. The cost of VMT reduction is unknown to us and highly uncertain. Therefore comparing GHG scenarios with BAU *underestimates* the true cost. On the other hand, comparing GHG scenarios with BAU-LoVMT *overestimates* the cost (or underestimates the benefits) since most likely there won't be incentives/policies to reduce VMT under no climate policy scenario. So in reality the "true cost" maybe somewhere in between, and it is difficult to value people's behaviors and change of social norms such as recycling, reducing VMT, etc. At this point, we present both results, recognizing more research will be needed for us to better present the true cost estimates of these scenarios.

Table 6.2. Summary of undiscounted energy system costs (in 2010\$) and cumulative emissions for primary CA-TIMES scenarios for 2010 to 2050.

	GHG-Step v. BAU	GHG-Step v. BAU-LoVMT	GHG-Line v. BAU	GHG-Line v. BAU-LoVMT
<i>Difference in Undiscounted Total Costs (\$M)</i>	391,414	1,075,829	953,104	1,637,519
<i>Difference in Discounted Total Costs (\$M)</i>	99,466	364,388	317,218	582,140
<i>Difference in Cumulative Emissions (MMTCO_{2e})</i>	2,925	1,969	4,324	3,367

Undiscounted Cost of emissions reduction (2010\$/tCO₂ reduced)	134	547	220	486
Discounted Cost of emissions reduction (2010\$/tCO₂ reduced)	34	185	73	173

The differences in energy system cost are between \$391 billion to \$1.6 trillion (or \$99 to \$582 billion discounted) over the 40 year modeling period and the differences in cumulative emissions are between 1.9 and 4.3 GtCO₂e. Comparing the GHG-Step scenario with the Reference BAU scenario, we see that the average cost of reducing a tonne of CO₂e is \$134 (\$34 discounted), while the average cost of reducing a tonne of CO₂e from the BAU-LoVMT scenario is \$547 (\$185 discounted). For the GHG-Line scenario, the average cost of reducing a tonne of CO₂e relative to the Reference scenario is \$220 (\$73 discounted) while the cost rises to \$486/tonne (\$173 discounted) CO₂e relative to the BAU-LoVMT scenario.

The GHG-Line scenario exhibits higher costs because of the more stringent intermediate carbon cap values and the need to reduce emissions more in intermediate years. But as a result of the linear cap, it also exhibits lower cumulative emissions than the GHG-Step scenario. Because the GHG-Step scenario pushes most of the emissions reductions until later years, the cumulative emissions savings is not very great relative to the BAU scenarios, however, these costs imposed on the system not only have the effect of reducing cumulative emissions in the modeling period 2010 to 2050, but they have changed the energy system such that emissions savings can continue into the future.

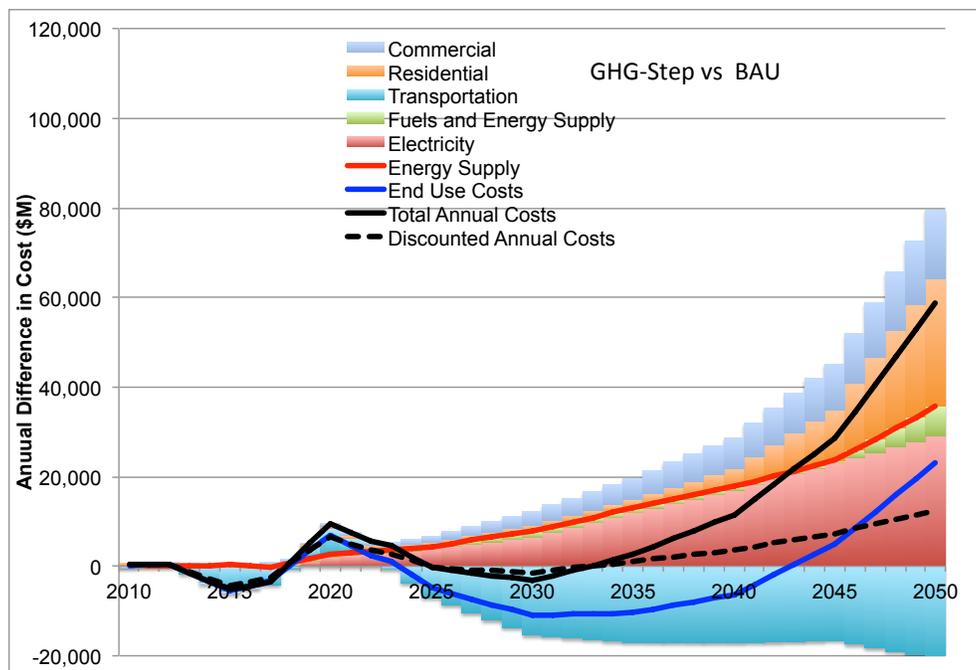


Figure 6.30. Annual cost difference between GHG-Step and BAU scenarios broken down by sector

Figure 6.30 shows the annual cost difference between the GHG-Step and Reference scenarios. In this graph, transportation costs only include the capital and O&M costs associated with purchasing vehicles (cars, trucks, airplanes, ships, etc.) and not the fuels used to power them. Those fuel costs are included in the “Fuels and Energy Supply” costs or the “Electricity” costs, depending on the type of fuel. The same is true for the other end-use sectors (commercial and residential).

As stated previously, the lower VMT in the GHG-Step scenario relative to the BAU scenario leads to reduced investments in vehicle purchases and negative costs associated with the transportation sector. Because the GHG-Step scenario has greater electricity demand, the costs of building additional power plants makes up the incremental costs seen in the figure. The additional cost of fuels supply is quite low. The cost of residential and commercial sectors rises (especially in later years) as more efficient appliances are purchased to help reduce emissions and meet the carbon cap in 2050. Overall, annual cost differences are relatively low (+/- \$10billion/year) until 2040 when costs rise to nearly \$60 billion to try and meet the 2050 emissions target. The model discounts future costs at 4% per year and thus high costs in the far future are valued less than similar costs in the near future.

Figure E.7 shows the comparison of cost for the GHG-Line and Reference scenarios. The magnitude of additional costs are similar for the GHG-Line scenario relative to the GHG-Step scenario but are shifted forward in time, because of the need to meet more stringent intermediate carbon caps. Because the cost of many technologies in the model decline with time, implementing low-carbon and efficient technologies earlier leads to higher annual costs. Transportation costs are still mostly negative in this figure because of the reduction in vehicle purchases. One thing to note is that CA-TIMES does not consider endogenous technological change and learning-by-doing (where increased adoption during early periods leads to cost reductions in the later periods) that might be associated with early actions. Therefore, if early actions lead to *more* technological innovation as some policies are designed to incentivize, then the cost can be lower than what we estimate without considering this effect.

Figure 6.31 and Figure E.8 show that if you remove the effect of varying levels of VMT demand, the costs associated with transportation are positive (i.e. more expensive advanced vehicles are needed to meet GHG targets than the BAU-LoVMT scenario). The other costs are quite similar to the costs differentials in comparisons with the primary Reference scenario.

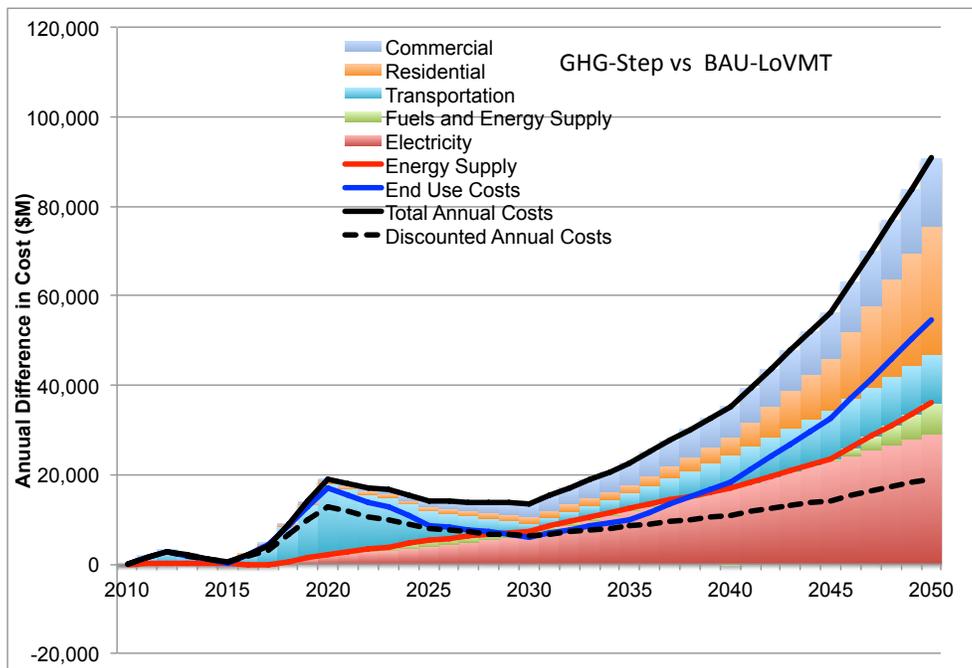


Figure 6.31. Annual cost difference between GHG-Step and BAU-LoVMT scenarios broken down by sector

6.2 Sensitivity Scenarios

The results of the CA-TIMES model optimization are strongly dependent on the set of technical and cost assumptions, policy constraints, resource availability and energy prices. Given the difficulty in predicting future trajectories of these parameters, it is helpful to run sensitivity scenarios to understand how the modeling results can change with changes in input assumptions. Unfortunately, as there are thousands of input parameters, it is not possible to explore the full variation on every possible input, so this section will focus on a few key sensitivity scenarios discussed in Section 5.3.

6.2.1 New nuclear power

In the primary scenarios, no nuclear power plants can be built due to societal and legislative barriers to nuclear power. This scenario variation removes that constraint and allows for several new types of nuclear power to be built.

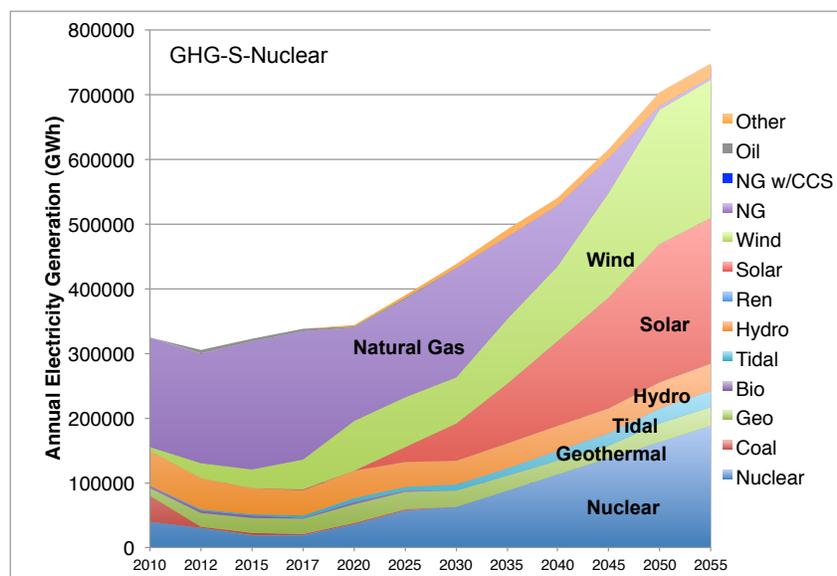


Figure 6.32. Electricity generation by resource type in the 80% Step GHG emissions reduction scenario with nuclear power (GHG-S-Nuclear).

The primary impact of this scenario is seen in the electricity sector. Comparing the electricity generation mix for the GHG-S-Nuclear scenario (Figure 6.32) to that of the GHG-Step scenario (Figure 6.22), a primary difference is the increase in total electricity generation (702 TWh vs. 667 TWh in 2050) when nuclear power is available. This essentially eliminates any electricity generation from fossil resources as large increase in nuclear power is accompanied by a reduction in natural gas generation.

While nuclear energy can only be used for producing electricity, it enables the use of a zero-carbon resource in many end-use sectors. The primary GHG scenarios (GHG-Step and GHG-Line) had essentially maxed out the available low carbon electricity supplies that could be used to match demand, and so marginal increases in electricity demand would come from natural gas generation.

The additional electricity generation is used in the commercial sector where 13% more electricity is used than in the GHG-Step scenario, and in electrolytic hydrogen production. Fuel cell vehicles have a higher penetration (46% vs. 38%) since the increased supply of low-carbon electricity translates to additional sources of low-carbon hydrogen production (via electrolysis). This reduces the contribution of light-duty VMT from combustion vehicles to only 4% in 2050.

The inclusion of nuclear power enables the production of more low-carbon electricity, which allows for greater use of electricity in end-use sectors, displacing emissions from the use of natural gas and other fuels. The carbon intensity of electricity in the GHG-S-Nuclear scenario declines to only 2 gCO₂e/kWh, much lower than the carbon intensity of electricity in the primary GHG scenarios (~57 gCO₂e/kWh).

Overall, GHG emissions are able to reduce further than in the primary GHG scenarios. In 2050, GHG emissions are reduced by 72% to 124 MMTCO₂e, a bit close to the 80% GHG reduction target of 90 MMTCO₂e.

6.2.2 Carbon capture and sequestration

Another important technology that is often discussed for carbon mitigation purposes, but is not included in our primary GHG scenarios is carbon capture and sequestration (CCS). While demonstrations of CCS technology have not progressed as fast as needed, this variant of the GHG-Step scenario (GHG-S-CCS) assumes that development accelerates and that CCS technologies are proven and available to be deployed at scale in the 2025 to 2030 timeframe.

CCS has implications in the electricity and fuels production sectors. In the electric sector, the natural gas combined cycle power plants with CCS account for a significant fraction of total generation in 2050 (13%) displacing much of the conventional natural gas generation (Figure 6.33). The remaining natural gas generation comes from combustion turbines that are needed for highly dispatchable generation in only a few timeslices. The carbon intensity of electricity in this scenario declines to 26 gCO₂/kWh, compared with 57 gCO₂/kWh in the GHG-Step scenario.

For fuels production, biofuels production with CCS is used to create “negative” emissions since some of the carbon in biomass is not returned to the atmosphere but injected into subsurface formations. These negative emissions can then be used to offset emissions from elsewhere in the energy system. In this scenario, all suitable biomass resources are used in Fischer-Tropsch processes with CCS to produce drop-in gasoline, diesel and jet fuel substitutes. Because approximately 2/3 of the biomass carbon can be captured in this process, approximately 62 MMTCO₂e can be sequestered (and which counts as negative emissions). In addition, in this scenario all hydrogen production also utilizes carbon capture and sequestration (2/3 via natural gas reforming and 1/3 via biomass gasification).

The light-duty vehicle mix is very different from the GHG-Step scenario. In GHG-S-CCS, there is much less use of electricity in the transportation sector in 2050 (BEVs + PHEVs account for 15% of VMT). Hydrogen is widely used by 2050 accounting for 40% of LDVs but ICEs, HEVs and FFVs running on biofuels and petroleum fuels make up the remainder of vehicles (45%). This is because the negative emissions from bioCCS (62 MMTCO₂e) permits much more use of petroleum than in a scenario without CCS.

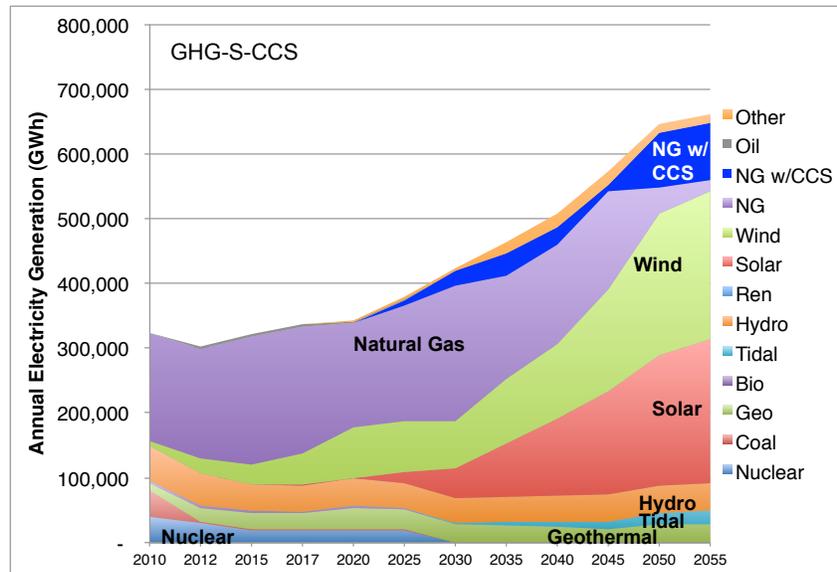


Figure 6.33. Electricity generation by resource type in the 80% Step GHG emissions reduction scenario with carbon capture and sequestration (GHG-S-CCS).

Overall, the addition of CCS technology in the GHG-S-CCS scenario enables it to meet the 80% reduction target for emissions in 2050 (90 MMTCO_{2e}) due to the ability to reduce the carbon intensity of both electricity and fuels and generate negative emissions (via bioCCS).

6.2.3 High renewable electricity growth

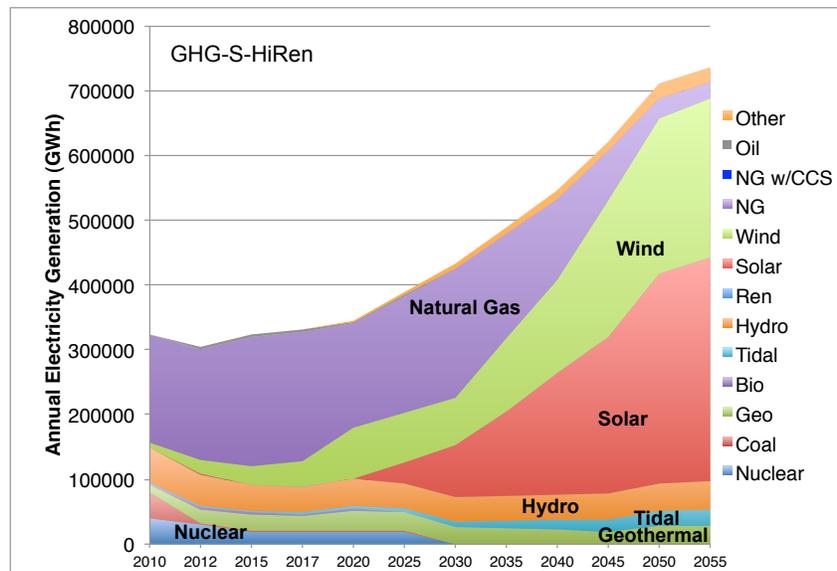


Figure 6.34. Electricity generation by resource type in the 80% Step GHG emissions reduction scenario with higher renewable deployment (GHG-S-HiRen).

In the primary GHG scenarios, the rate of installation of renewable resources is limited (e.g. utility solar is limited to growing 2 to 3 GW/yr, wind is limited to 3 to 4 GW/yr). In this scenario (GHG-S-HiRen), the rate of renewable deployment is allowed to progress more quickly. In the primary GHG scenarios, as wind and solar bumped up against these limits on the rate of deployment and the remainder of electricity

generation came from natural gas power plants. In this scenario, the higher deployment rates allow for greater generation of renewable electricity. Overall electricity generation in GHG-S-HiRen scenario is 710 TWh (and 562 coming from wind and solar) vs. 667 TWh (440 TWh from wind and solar) in the GHG-Step scenario. Like the nuclear scenario, this allows for the displacement of natural gas generation and a reduction in carbon intensity of electricity (to 15 g/kWh in 2050) even as generation rises significantly. The scale of renewable electricity deployment is quite large. From 2010 to 2050, 120 GW of wind power and 161 GW of solar generation are built exclusively to serve California's electricity demand (vs. 91 GW of wind and 109 GW of solar in the GHG-Step scenario).

And like the GHG-S-Nuclear scenario, adding more low-carbon electricity can help reduce emissions further, but not quite enough to meet the 80% reduction target. GHG emissions from this scenario achieve a 70% reduction in GHG emissions by 2050 (134 MMTCO_{2e}).

Like in the nuclear scenario, additional electricity generation is used in the commercial sector and hydrogen production (1/3 of H₂ comes from electrolysis). The 2050 mix of light duty vehicles almost exactly matches the GHG-S-Nuclear scenario (40% BEV, 10% PHEV, 46% FCV, and 4% ICE/HEV/FFV).

6.2.4 Oil and gas prices

This section describes the impact of two sensitivity scenarios in which the price of oil and gas are higher and lower than the primary scenarios. In the primary scenarios, oil prices rise to \$180/bbl and natural gas to over \$8/MMBTU by 2050. In the high oil and gas price scenario (GHG-S-HiOilGas), oil reaches \$250/bbl and gas rises to \$11/MMBTU in 2050. In the low price scenario (GHG-S-LoOilGas), oil declines to \$70/bbl and \$3.7/MMBTU in 2050.

Changing the oil and gas prices in the GHG scenarios does not significantly change the mix of technologies that are used to meet the demand for energy. The electricity generation mix and overall energy resource use mix are basically identical from 2010 to 2050 for the GHG-Step, GHG-S-HiOilGas and GHG-S-LoOilGas). GHG emissions are still the same in 2050 (170 MMTCO_{2e}, a 62% reduction from 1990 levels).

The main effect that these scenarios have is on total energy system costs and the cost of mitigation. As we will show in Section 6.2.7, the impacts on costs is fairly small compared with the other scenarios.

6.2.5 Low battery and fuel cell costs

This section describes the impact of two sensitivity scenarios in which the cost of batteries and fuel cells is lower than the primary scenarios. The low cost battery assumptions are added to the GHG-Step scenario to create the GHG-S-Batt scenario, while the low cost fuel cell assumption is part of the GHG-S-FC scenario. In the GHG-S-Batt scenario, the purchase cost of BEVs declines to where it is \$600 below the cost of a baseline gasoline vehicle in 2050, while the fuel cell cost declines to around \$500 below the cost of a baseline gasoline vehicle in 2050. These values are reflective of the "expected" cost assumptions found in the NRC's study on light-duty transitions.

However, these scenarios do not change the model outcomes from the results seen in the GHG-Step scenario. Even though the GHG-Step scenario does not meet the 80% GHG reduction target, the model chooses technologies that will minimize the GHG emissions while meeting energy service demands. Plug-in electric vehicles (PEVs) such as PHEVs and BEVs are used extensively because electricity is a relatively low carbon fuel, though marginal electricity in the GHG-Step scenario has to come from natural gas combined cycle. PEVs actually are used up to their limit of 50%, imposed due to limitations on the availability of home-based charging infrastructure. Hydrogen FCVs are also used extensively, however, hydrogen in these scenarios is made from natural gas reforming or electrolysis (which will come from

natural gas combined cycle). Thus, despite the cost differences between PEV costs and FCV costs that come in these two scenarios, both are used as much as they can be, while still minimizing emission. In the LDV sector, this means 38% FCV, 40% BEV and 10% PHEV in 2050 (see Figure 6.35). Other mixes of these vehicles may result in lower costs but will result in higher emissions and thus are not chosen by CA-TIMES.

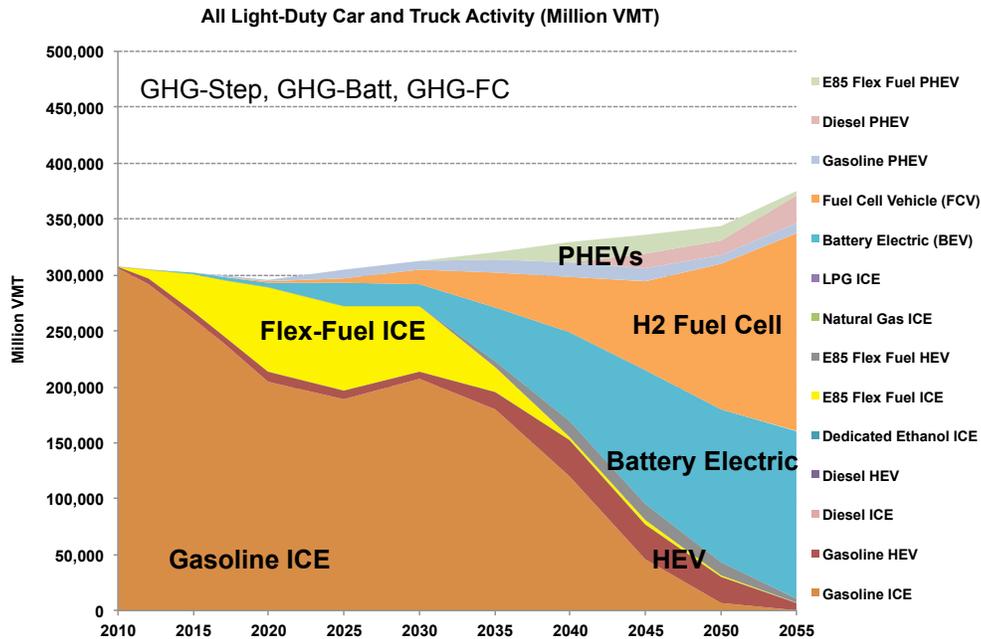


Figure 6.35. Light-duty vehicle VMT by vehicle type in the GHG-Step, GHG-Batt and GHG-FC scenarios

Thus, the main effect that these scenarios have is on total energy system costs and the cost of mitigation.

6.2.6 Higher biomass supply

Biomass plays a critical role in the production of biofuels in the GHG scenarios. Reducing emissions from transportation, the largest emitting sector, requires abundant low carbon transportation fuels. Biofuels are one of the key ways to reduce GHG emissions from transport modes that must continue to use liquid fuels (marine, aviation, heavy duty, etc.). This scenario, GHG-S-HiBio doubles the quantity of available biomass from instate and neighboring regions that can be used in the California energy system. The total biomass available for California in the base case is 1800 PJ, enough biomass to make approximately 1200 PJ (or 9 billion GGE) of biofuels. This scenario allows 3600 PJ of biomass, enough to make approximately 2400 PJ (18 billion GGE) of biofuels. The supply curve for biomass shown in Figure 3.4 is essentially stretched out such that there is twice the amount of biomass available at any price.

This large quantity of biomass has an impact in most sectors. For example, unlike all other GHG scenarios, biomass is used for a small amount of electricity generation, where it makes up 2% of generation in 2050. Total electricity generation from all sources in GHG-S-HiBio is lower than GHG-Step (614 TWh vs. 667 TWh).

Biomass is used primarily for transportation fuels so that sector has some major differences (Figure 6.36). Light-duty is still mostly electrified with 40% FCVs, 40% BEVs and 10% PHEVs, with the remaining 10% ICE vehicles (mostly FFVs). In transportation as a whole, petroleum based fuels decline rapidly comprising only 13% of total fuel use in 2050. Biofuels account for 70% of transportation fuel use and

hydrogen and electricity account for 7% and 9% respectively. Hydrogen in this scenario is made primarily from natural gas, but 1/3 is made from biomass gasification (to meet the 33% renewable mandate).

There is little change in the mix of technologies or fuel usage in the residential and commercial sectors.

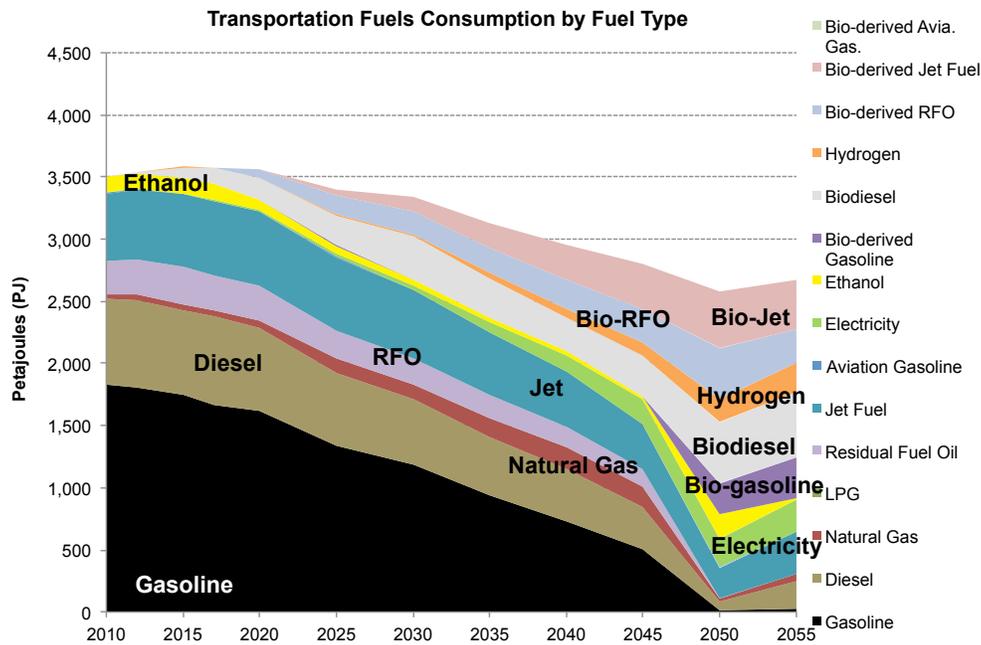


Figure 6.36. Transportation fuel mix in the High Biomass 80% Step GHG Emissions Reduction Scenario (GHG-S-HiBio).

Overall, the GHG-S-HiBio scenario just barely misses meeting the 80% GHG reduction goal. Emissions are 95 MMTCO_{2e}, or 79% below 1990 levels. This model does not include direct or indirect land-use change impacts associated with biofuels, so the emissions reduction could be overestimated.

6.2.6 Elastic demand (ED)

While in all other scenarios, energy service demands were specified exogenously as input assumptions (based upon drivers such as population, housing units and commercial floorspace), this scenario (GHG-S-Elastic) uses a very different approach, described in Section 2.2. Elasticities are specified for certain energy service demands within the detailed end-use sectors modeled in CA-TIMES (i.e. transportation, commercial and residential) (see Appendixes B and C for the assumptions on the elasticity values of the end use services). As described in Section 2.2, rather than continue investing in high cost, low-carbon technology to meet the exogenously specified service demand, CA-TIMES-ED computes a partial equilibrium on energy markets. Thus, if prices for energy services rise, demand will fall by an amount specified by the elasticity. An equilibrium point will be reached where the falling demand will reduce the price until the point where the price of supplying the energy service will match the demand for the energy service. In this carbon constrained scenario, demand reductions will lead to lower costs, because demand will only be reduced if the cost of reducing demand (ELASCOST) is lower than the cost of investing in new technolog(ies) (INVCOST). When considering only technology and energy costs (with and without the consideration of consumer surplus loss), the elastic demand scenario will reduce costs because less fuel and fewer end-use technologies will be needed. Reducing demand will also reduce emissions, as demand is generally met with a mix of fossil and low-carbon resources.

The amount of demand reduction for a given service will be dependent on several things: (1) the value of elasticity for the service demand, and (2) the benefit of reducing demand (which, in turn, depends on the difference between the cost savings of reducing the supply of energy service (e.g. buying less expensive low-carbon appliances and fuels to meet the demand) and the cost of lost consumer surplus (associated with having less service) and (3) the maximum allowable demand reduction (which is set in this scenario to be 20%). Because this partial equilibrium approach provides another mitigation option (demand reduction) to reduce emissions, the costs of mitigation will be equal to or lower than scenarios without ED.

All sectors with elasticity values specified reduce demand by 20%, the maximum allowable demand reduction in our scenarios. This is due to our assumption of very steep mitigation costs that sharply increase after we exhaust all available technologies in our model to meet the GHG target. This sharp increase in costs leads to large service demand reduction, specifically during the later modeling period.

Total electricity generation in this scenario is lower than the corresponding GHG-Step scenario (529 TWh vs. 667 TWh) in 2050. Because total demand is lower, the limited wind and solar resources can provide a greater fraction of total electricity generation. Natural gas generation in 2050 only accounts for 4% of electricity generation in the GHG-S-Elastic scenario vs. 17% in GHG-Step. The same is true of transportation fuel demands, which, in GHG-S-Elastic, is 20% lower than the GHG-Step scenario and thus biofuels can make up 47% of transport fuels instead of 38% in GHG-Step.

Ultimately, a model with elasticity on demands will be a more realistic representation of decision-making and energy usage in response to rising prices. However, this approach is quite complex and there is uncertainty around different aspects of this scenario including estimating the elasticity values, interactions between elasticity values, the carbon cap and hurdle rate of technologies. This scenario represents preliminary analysis of adding elastic demand to the CA-TIMES model, but more work is needed to improve the modeling and our understanding of ED.

6.2.7 Comparison between sensitivity scenarios

Figure 6.37 shows a comparison of the cumulative GHG emissions and GHG emissions reductions from 1990 levels for the various sensitivity scenarios presented in this section. The Reference (BAU) scenario has the highest cumulative emissions and the lowest level of reduction in 2050. Only one scenario actually meets the 80% reduction target, GHG-S-CCS. Two other scenarios get very close to an 80% reduction (GHG-S-HiBio and GHG-S-Elastic at 79% reduction). The GHG-S-Nuclear scenario has the lowest cumulative emissions of any scenario, even though it only achieves a 72% reduction in GHG emissions by 2050. Again, as we noted earlier that our model includes shipping and aviation emissions not included in the State's GHG emission inventory. In addition, the model does not consider offsets option in any of the GHG scenarios. Therefore, our 80% GHG scenario can be considered more stringent than the implementation plan adopted by CARB.

The two primary GHG scenarios (GHG-Step and GHG-Line) reduce emission by 62%, as do several others (GHG-S-HiOilGas, GHG-S-LoOilGas, GHG-S-Batt and GHG-S-FC) as these other sensitivity scenarios do not change the availability of low carbon resources or technologies, only their prices. Figure 6.38 shows the emission trajectories of these scenarios over time.

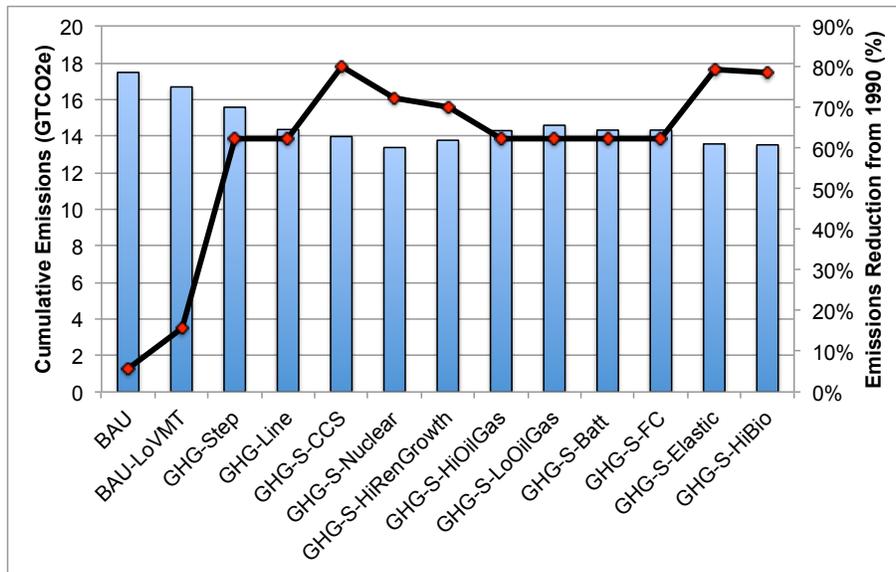


Figure 6.37. California cumulative GHG emissions and 2050 emissions reduction from 1990 levels

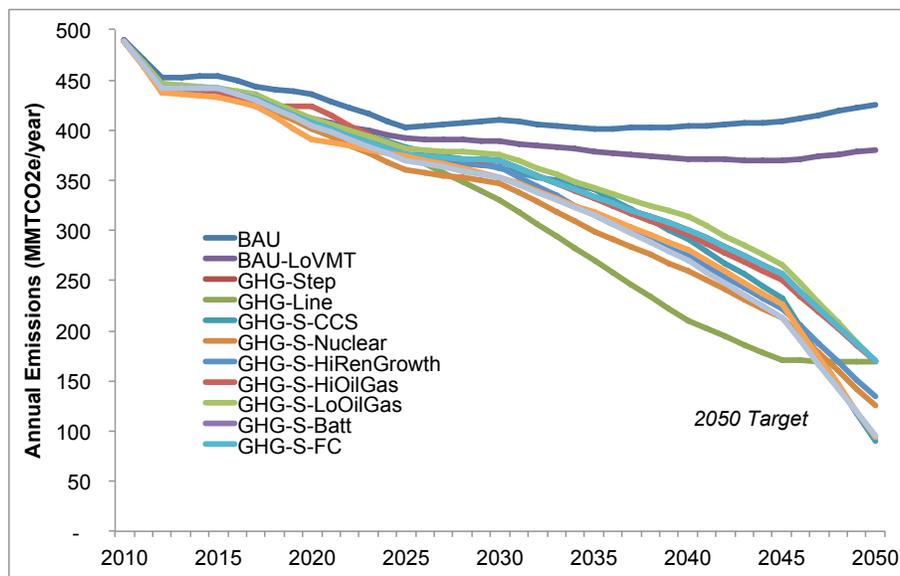


Figure 6.38. California annual GHG emissions and 2050 emissions reduction from 1990 levels

Figure 6.39 shows the primary energy resource mix for each sensitivity scenario. The GHG scenarios all have lower primary energy usage than the BAU scenarios indicating that improved efficiency is one of the primary means of reducing emissions. The GHG-S-Elastic scenario also has additional reductions in service demand so total energy use is significantly lower (28% lower than BAU-LoVMT and 21% lower than GHG-Step).

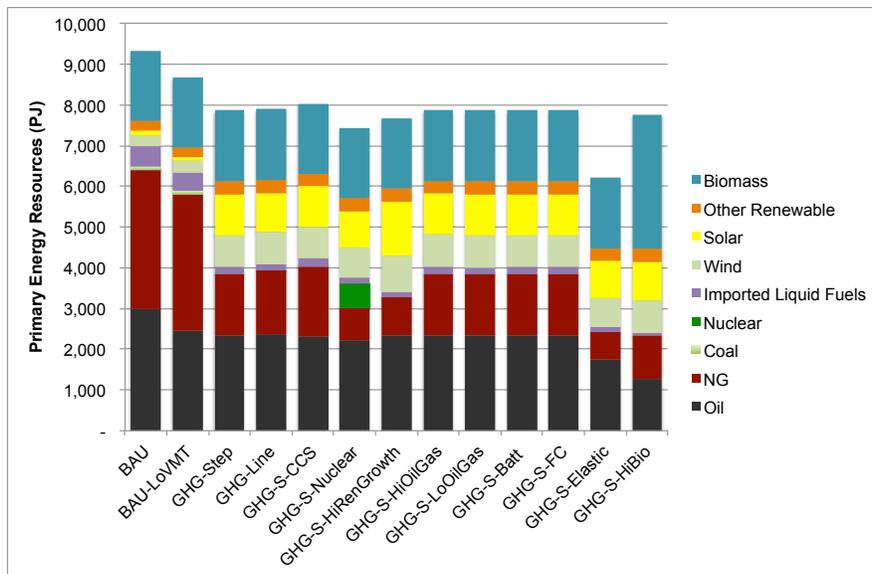


Figure 6.39. California primary energy resource usage by sensitivity scenarios (for 2050)

Figure 6.40 shows California’s generation mix in 2050 for all the sensitivity scenarios. We see most of the GHG scenarios look remarkably similar, with most electricity coming from wind and solar, with contributions from natural gas, hydropower, tidal, geothermal and other. The scenarios that deviate from this pattern are if new electric generation resources are available, including nuclear power (GHG-S-Nuclear), CCS (GHG-S-CCS), higher deployment of wind and solar (GHG-S-HiRenGrowth). Low carbon electricity generation is at its limit in most of the scenarios, so additional demand for electricity would come from natural gas. The two scenarios with higher electricity demand are the ones where there are additional low carbon electricity sources available (GHG-S-Nuclear and GHG-S-HiRenGrowth). The GHG-S-CCS, GHG-S-Elastic and GHG-S-HiBio scenarios have lower electricity demand because other options are available to reduce emission beyond low carbon electricity, namely negative emissions with bioCCS, demand reduction and additional biofuels respectively.

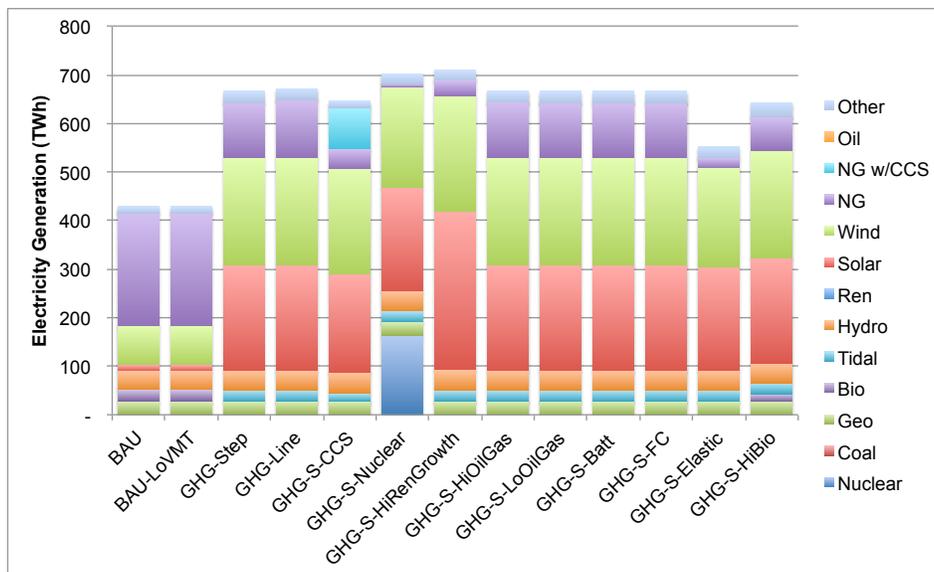


Figure 6.40. California electricity generation by sensitivity scenarios (for 2050)

Figure 6.41 shows California’s LDV fleet mix in 2050 for the different sensitivity scenarios. Again, most GHG scenarios are very similar to the GHG-Step scenario. The scenario with the greatest difference is GHG-S-CCS, where the use of negative emission biofuels allows the GHG target to be met with fewer electric vehicles.

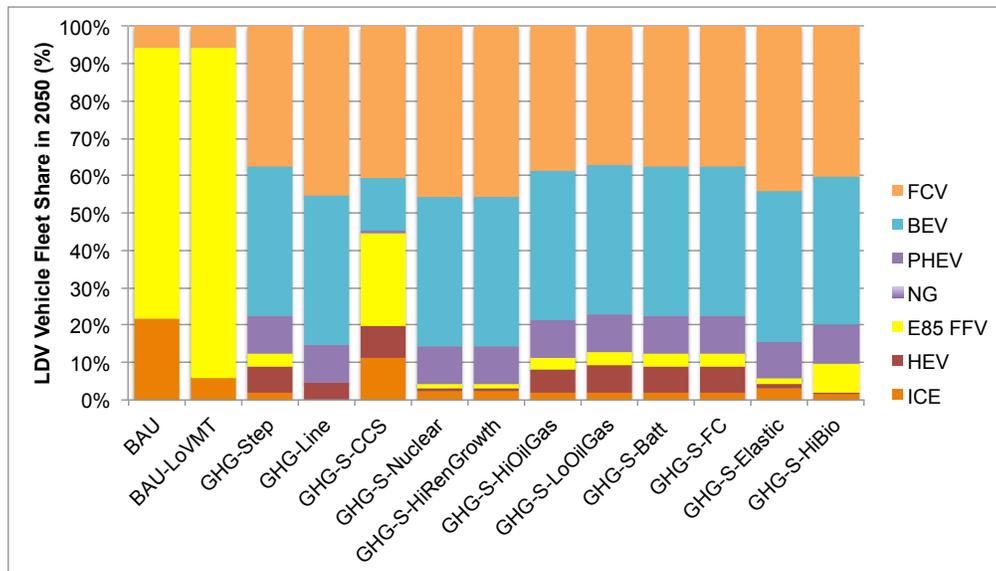


Figure 6.41. California light duty vehicle fleet share by sensitivity scenarios (for 2050)

Table 6.4 shows the cumulative emissions, total costs and emissions and cost differences for each of the sensitivity scenarios. Comparing the difference in cost and emissions between the reference scenarios (BAU and BAU-LoVMT) and a GHG scenario can give an average cost of mitigating a tonne of CO₂. Costs for mitigation are always higher when comparing to the BAU-LoVMT scenario than the BAU scenario because the lower VMT will lead to a smaller difference in cumulative VMT. The cost of mitigation relative to the primary Reference (BAU) scenario can be a little misleading if there are actually costs associated with the VMT reductions that are assumed in the GHG scenario. These costs are also compared in Figure 6.42. The GHG-S-CCS scenario has the lowest mitigation cost because CCS is assumed to be a relatively low cost mitigation option, especially when coupled with biomass gasification plants to produce negative emissions. The nuclear scenario (GHG-S-Nuclear) and biomass scenario (GHG-S-HiBio) also have relatively low cost mitigation costs associated with low-cost, low carbon resources (nuclear for natural gas generation and biofuels for petroleum resources).

Table 6.1. Table of cumulative emissions, total system costs and cost and emissions differences for various sensitivity scenarios

	<i>Cumulative Emissions (2010-2050) MMTCO₂e</i>	<i>Undiscounted Total Cost (2010 to 2050) \$B</i>	<i>Discounted Total Cost (2010 to 2050) \$B</i>	<i>Emissions Difference (MMTCO₂e)</i>		<i>Average cost of emissions reduction (\$/tonne CO₂e), undiscounted</i>		<i>Average cost of emissions reduction (\$/tonne CO₂e), discounted</i>	
				<i>vs. BAU</i>	<i>vs. BAU-LoVMT</i>	<i>vs. BAU</i>	<i>vs. BAU-LoVMT</i>	<i>vs. BAU</i>	<i>vs. BAU-LoVMT</i>
BAU	17,256	8,993	3,768	-	-	-	-	-	-
BAU-LoVMT	16,299	8,309	3,503	-	-	-	-	-	-
GHG-Step	14,331	9,385	3,867	2,925	1,969	134	547	34	185
GHG-Line	12,932	9,947	4,085	4,324	3,367	220	486	73	173
GHG-S-CCS	13,980	8,886	3,670	3,276	2,320	-33	249	-30	72
GHG-S-Nuclear	13,379	9,451	3,897	3,877	2,920	118	391	33	135
GHG-S-HiRenGrowth	13,777	9,549	3,922	3,479	2,523	160	492	44	166
GHG-S-HiOilGas	14,303	9,392	3,865	2,953	1,996	135	542	33	181
GHG-S-LoOilGas	14,596	9,357	3,856	2,660	1,703	137	615	33	207
GHG-S-Batt	14,331	9,384	3,867	2,925	1,969	134	546	34	185
GHG-S-FC	14,331	9,384	3,867	2,925	1,969	134	546	34	185
GHG-S-Elastic	13,574	10,691	4,260	3,683	2,726	-110 (plus welfare loss)	102 (plus welfare loss)	-51 (plus welfare loss)	28 (plus welfare loss)
GHG-S-HiBio	13,525	9,475	3,892	3,731	2,774	129	420	33	140

The elastic demand scenario (GHG-S-Elastic) has the lowest mitigation costs among the sensitivity scenarios (Figure 6.42). The welfare losses are represented in the Elastic scenario as shaded bars. Additional demand reductions are used in this scenario to help meet the 80% GHG reduction target. These costs (loss of consumer surplus) are not real technology costs, therefore they are excluded when comparing across other scenarios without ED. At the same time, there can be real welfare losses associated with reducing VMT, and energy services in our homes and commercial spaces. In the future, we will conduct ED exercise across all scenarios to allow more consistent comparison. For the time being, the scenario is used to illustrate the potential savings in GHGs as well as reduced investments in expensive advanced technology. Also as we noted earlier comparing GHG scenarios with BAU *underestimate* the true cost as VMT reduction is assumed to be free in the current version of the model. On the other hand, comparing GHG scenarios with BAU-LoVMT *overestimate* the cost (or underestimate the benefits) since most likely there won't be incentives/policies to reduce VMT under no climate policy scenario. So in reality the "true cost" maybe somewhere in between these two estimates and we recognize that more research will be needed for us to better present the true cost estimates of these scenarios.

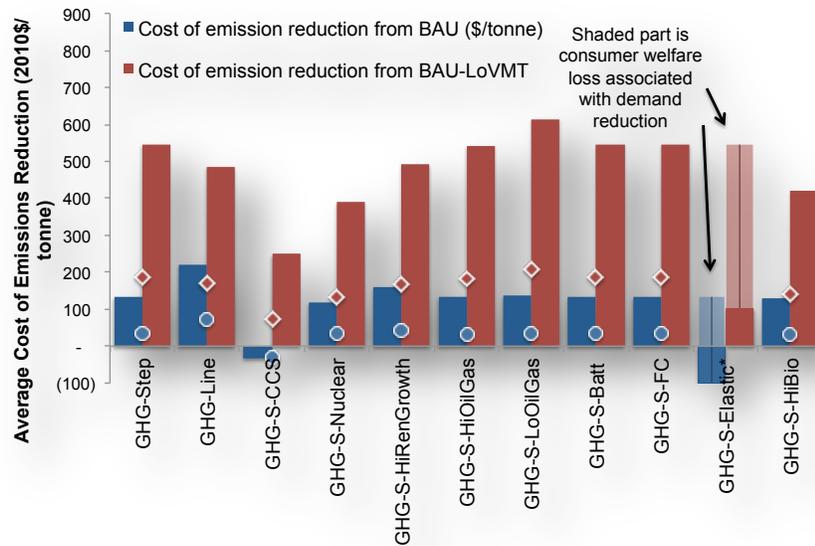


Figure 6.42. Average cost of emission reduction (\$/ton CO₂) between 2010-2050 comparing with BAU and BAU-LoVMT scenario. Also shown are the discounted costs (r=4%) compares with BAU (blue dots) and with BAU-LoVMT (red diamonds).

Figure 6.43 shows mitigation costs by scenario over GHG emission reductions (and also over time as more GHG emissions are reduced each year by 2050). The high costs in the near term reflect various constraints such as policy, technology, growth constraints impose on the system leading to high short-term costs. The costs in the near term (particularly around 2020) can be very high (>\$500/ton CO₂e) for GHG-Line and GHG-S-HiOilGas scenarios. This implies potential high costs associated with certain policy, technology, or social constraints. We will investigate the underlying factors contribute to the high costs in our future studies. The figure also implies that certain technologies, such as CCS (GHG-S-CCS), biofuels (GHG-S-HiBio), changes in behavior (GHG-S-Elastic), or changes in markets (GHG-S-LoOilGas, and GHG-S-HiOilGas if biofuels are successful) can lead to very low mitigation costs prior to 2020. Over the long-term, the costs stabilize to around \$20-\$60/ton CO₂e.

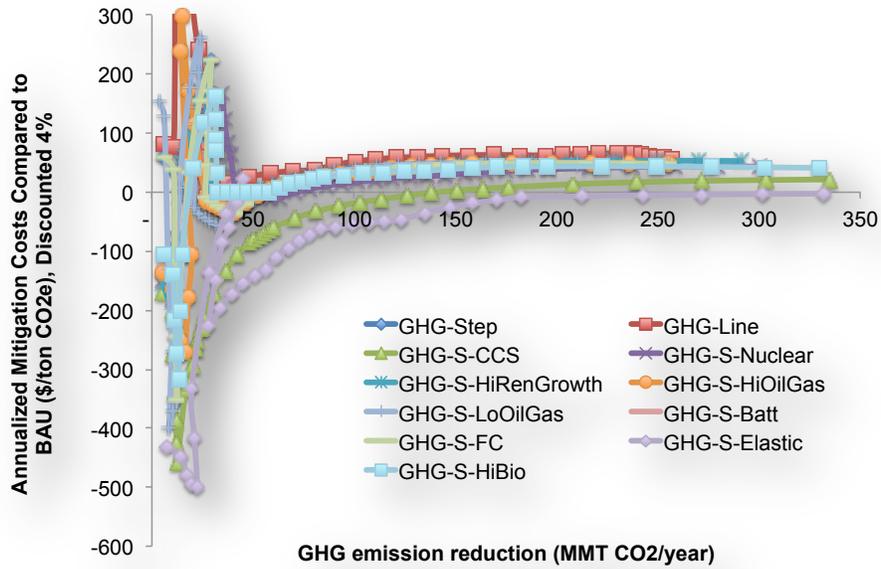


Figure 6.43. GHG mitigation costs (compare with BAU, discounted at 4%) by scenario over GHG emissions. GHG-S-Elastic scenario does not contain consumer welfare loss associated with reduced service demand. The costs in the near term (particularly around 2020) can have very high mitigation costs (>\$500/ton CO₂e) for GHG-Line and GHG-S-HiOilGas scenarios but the figure is truncated at \$300/ton CO₂e.

7. DISCUSSION OF SCENARIO MODELING RESULTS

7.1 Discussion of modeling approach

The scenarios and modeling results presented in the last section provide a small window into the wide expanse of possible model scenarios, input assumptions, and system approaches that are possible to explore with the CA-TIMES model. As such, the CA-TIMES model structure and scenarios in this study represent one step in the model development process.

The previous section presented scenarios presented several scenarios that investigated how the California energy system might meet an 80% reduction in greenhouse gas emissions below 1990 levels by 2050. These scenarios are different from other scenario planning processes (such as those developed by Shell or Global Business Network). When CA-TIMES is run as a cost optimization model, the overall approach is to meet the demand for energy services (specified in the model inputs). It will do so by finding the right approach of energy supply, conversion and end-use technologies that meets the demand for energy and all of the many model constraints. With a deterministic model, to achieve different model results, it is necessary to change input assumptions or model constraints. This is how scenarios are generated for CA-TIMES. And for this analysis, the primary change to the model when modeling an 80% reduction goal is an upper limit (cap) on the amount of carbon that can be emitted by energy processes in the State.

The CA-TIMES model essentially acts as a global decision-maker with perfect foresight, whose goal is to minimize the cost of meeting energy demands for the entire modeling period. It uses a discount rate of 4% to equate inter-temporal costs, thus valuing costs in the far future less than in the near-term. It is in this context that all of the modeling results presented should be understood. Because the goal is to minimize the net present values of the total system cost, the model can and does trade off options in disparate sectors. In essence, the model will compare the cost of GHG reduction from different options and implement it in the way that has the lowest system cost. For example, CA-TIMES may find that it is cheaper to reduce emissions by investing in wind power than by investing in electric vehicles. This approach will lead to unequal emissions reductions between sectors but which minimizes the cost of abatement. This can be thought of as an extremely efficient carbon market, where the cost of reduction in all sectors is known and reductions are traded in a way that only the lowest cost options are actually implemented, although CA-TIMES does not actually represent a carbon market within the model.

In thinking about tradeoffs between supply and end-use technologies and how decisions are made, each option is considered to provide equal service (e.g. a battery electric vehicle provides the same service as a gasoline car) and the only distinctions between the two are the fuel inputs, efficiency and cost. Thus, consumers or decision-makers in all sectors are making decisions solely on the basis of cost and carbon (and other policy) constraints. In the absence of any binding constraints, it is assumed that the decision-maker will pick the least cost options available.

The CA-TIMES modeling approach is both a “bug” and a “feature”. Under certain circumstances, it is a “bug” if the goal is to understand how different decision-makers will act within a carbon constrained world. Having one decision-maker making the economically optimal solution can lead to very different outcomes than millions of decision-makers optimizing their utility. However, it provides a look at how to achieve the intended outcome (an 80% reduction in GHG emissions) in the most efficient and least-cost manner. As such, it provides a picture of what the world could look like if the market is extremely efficient and all current and future costs and demands are perfectly known. It is then up to the analyst and policy-maker to try to implement policies that bridge the gap between the ideal world and the real world.

7.2 Discussion of modeling results

The GHG scenarios presented in the results section show that it is difficult to achieve an 80% reduction in GHG emissions relative to 1990 emissions in California given our all-inclusive emission accounting (which include marine and aviation, all electric imports emissions, and no offsets) that is more stringent than CARB's implementation. Major changes to the energy system are needed. On the supply side, the most notable changes include major investments in renewable electricity generation, biofuel production, and hydrogen production. On the demand side, these change include substantial efficiency improvements across all sectors, including investment in battery electric and fuel cell vehicles, more efficient trucks, buses and planes, and major reductions in building energy use.

Even with all of these changes, we see that in most scenarios the GHG reduction falls short of the all-inclusive 80% target (include marine and aviation, all electric imports emissions, and no offsets). 60-80% reductions are possible depending on the availability of low-carbon energy resources if we include aviation and marine emissions and do not consider offsets. Our primary GHG scenarios (GHG-Step and GHG-Line) have electricity supplies available such that the growth in wind and solar power is limited to approximately 102 GW of solar capacity and 74 GW of wind (which produce around 438 TWh of electricity generation) by 2050. Also important to note is that CA-TIMES does not include any major electricity storage technologies besides pumped hydro (which has fixed capacity).

Allowing for additional low carbon electricity generation sources (i.e. nuclear power, natural gas generation with CCS or additional wind and solar generation) helps to further reduce emissions from 62% reduction to 72% (GHG-S-Nuclear), 80% (GHG-S-CCS) and 70% (GHG-S-HiGrowthRen), although the CCS scenario does not only include additional low carbon electricity resources. Low carbon electricity resources in these three additional scenarios grow to 675, 592 and 657 TWh in these three scenarios respectively.

Another key area, seen in the GHG-S-HiBio, is the addition of low-carbon biomass energy resources. Biomass is used in the model almost exclusively to produce low-carbon biofuels for transportation purposes, but the resource available to the model in most GHG scenarios is sufficient to produce about 7.6 billion GGE, well below the total liquid fuel demand of 15 to 31 billion gallons seen in most of the scenarios. The marginal gallon of biofuels produced displaces an equivalent amount of petroleum-based fuel (gasoline, diesel, jet or RFO), while use of biofuels in electricity displaces lower carbon options, including natural gas electricity generation. Doubling the quantity of available biomass for use in making biofuels can displace significant quantities of petroleum fuels so the 80% target is almost reached (79% reduction).

Carbon capture and sequestration (CCS) is another means of increasing the supply of low-carbon resources, by adding natural gas and coal to that list. Using CCS does not specifically address how to provide the transportation sector with significant quantities of low carbon fuels. However, coupled with biomass gasification for hydrogen and Fischer Tropsch fuel synthesis, CCS can actually sequester approximately 66 to 100% of the carbon in biomass. This negative emissions can lead to an offset which allows for continued use of petroleum fuels, where 1 GGE of bioCCS produced biofuel can offset 2 GGE of gasoline, diesel or jet fuels.

In other scenarios, where the cost of energy resources or key technologies change, the emissions and fuel usage results do not change appreciably. In scenarios where the 80% GHG reduction target is not met, the model is using every option to reduce emissions as much as it can, no matter the cost (below a certain threshold) so changing the costs does not change the choice of technologies or energy resources. In the absence of a GHG constraint or when the GHG constraint is met comfortably, there may be enough freedom in the results that changing costs could have an impact on the choice of technology and resources.

Our elastic demand scenario attempts to model more realistic consumer behaviors given prices increase. The scenario results suggest that there is large potential savings in GHG emissions as well as reduced investments in expensive advanced technology. However, there are also real consumer welfare losses associated with demand reduction, though at present our estimates of consumer welfare losses are still uncertain and more work is needed to estimate the welfare loss of reduced service demand. Similarly, VMT reduction can lead to substantially lower mitigation costs compared with scenarios without VMT reduction. However, reducing VMT may require investments in infrastructure, such as walking and bike lanes, public transit systems, and consumer welfare losses. If we lower VMT in both BAU and GHG scenarios, then overall mitigation costs will be higher given that there are less emission reduction benefits associated with each investment in new technology.

Overall across all scenarios, the total emission reductions are 2,925 – 4,324 MMTCO₂e compared with BAU or 1,969 – 3,367 MMTCO₂e compared with BAU- LoVMT (attributing the benefits of VMT reduction in both the BAU as well as GHG scenarios as we are yet to estimate the costs of VMT reduction). The average mitigation costs are -\$110 (plus welfare loss, to be further estimated) to \$220/tonne CO₂e (or -\$51 (plus welfare loss) to \$73/tonne CO₂e with 4% discount rate) compared with BAU; and \$102 (plus welfare loss) to \$615/tonne CO₂e (or \$28 (plus welfare loss) to \$207/tonne CO₂e with 4% discount rate) compared with BAU-LoVMT. The results are summarized in Table 6.4 and Figure 6.42.

Mitigation cost curves, which are calculated as the mitigation costs divided by the level of GHG reduction, suggest that near-term costs (around 2020) can be very high (>\$500/tonne CO₂e) for the GHG-Line and GHG-S-HiOilGas scenarios. The high costs in the near-term reflect various constraints, such as policy, technology or growth constraints, which, when imposed on the system, lead to high short-term costs. More work is still needed to find out the factors/constraints contribute to the near-term high costs. Policy measures, such as allowing banking (and even possibly borrowing) of credits beyond 2020, or more flexible compliance across time periods can be adopted to smooth out the transition. This requires significant amounts of further research before we set the 2030 targets and corresponding policy measures to smooth out the transition. The results also suggest that certain technologies, such as CCS (GHG-S-CCS), biofuels (GHG-S-HiBio), changes in behavior (GHG-S-Elastic), or changes in markets (GHG-S-LoOilGas, and GHG-S-HiOilGas if biofuels are successful) can lead to very low mitigation costs prior to 2020. These results are summarized in Figure 6.43.

8. NON-CORE EXPERIMENTAL TIMES MODELS/SCENARIOS

This section describes several innovative stand-alone models that use TIMES algorithm (cost-minimization) but are currently too computational intensive to be included in CA-TIMES v1.5. These new modeling techniques demonstrate areas that we consider critical to improve upon the existing model. We demonstrated how these improvements can be made and the expected results. We expect to incorporate these new methodologies, or will develop simpler approaches to incorporate these new modeling techniques into the main model in the future.

8.1 Hydrogen Infrastructure Model

This section describes a stand-alone model (H2TIMES) that has been developed to simulate the development of hydrogen infrastructure in California using the TIMES modeling framework. It attempts to build the least cost H₂ infrastructure needed to meet an exogenously specified demand for hydrogen in 8 regions of the state. More information can be found in the detailed paper (Yang and Ogden 2013).

The goal of the H2TIMES modeling is to develop a policy relevant, spatially-representative detailed hydrogen infrastructure transition optimization model for California. The purpose of the analysis is to understand the context and influence of different policies on the development, cost and emissions associated with hydrogen deployment in California. H2TIMES has a special focus on low-carbon and renewable hydrogen futures by 2050.

8.1.1 Spatial details of H2TIMES

The hydrogen demand in H2TIMES is distributed among eight regional clusters in order to account for differences in hydrogen demand density and total demand in different regions of the state, which will influence the cost of hydrogen production and delivery. Data from the US Census (US_Census_Bureau 2000) identifies 55 urbanized areas in California, which have a population of greater than 50,000 people. These urbanized areas are distributed into eight regional clusters, and the assumption is made that a separate fuel infrastructure is developed in each of these regional clusters (i.e. hydrogen produced in and for one regional cluster is not available to meet the demand for hydrogen in another cluster). The level of spatial disaggregation was chosen for this study in order to understand the development of distinct regional hydrogen infrastructures that have different demand levels and densities. Figure 8.1 shows a map of the seven clusters in California.

For each cluster, pipeline and hydrogen truck delivery distances are calculated to deliver hydrogen to a network of refueling stations in each cluster. These distances are then translated into the capital and operating cost inputs for pipeline and liquid truck delivery infrastructure in each regional cluster. Intracity (local distribution) pipeline distances for a given urbanized area are calculated using an idealized city model developed by Yang and Ogden (Yang and Ogden 2007).

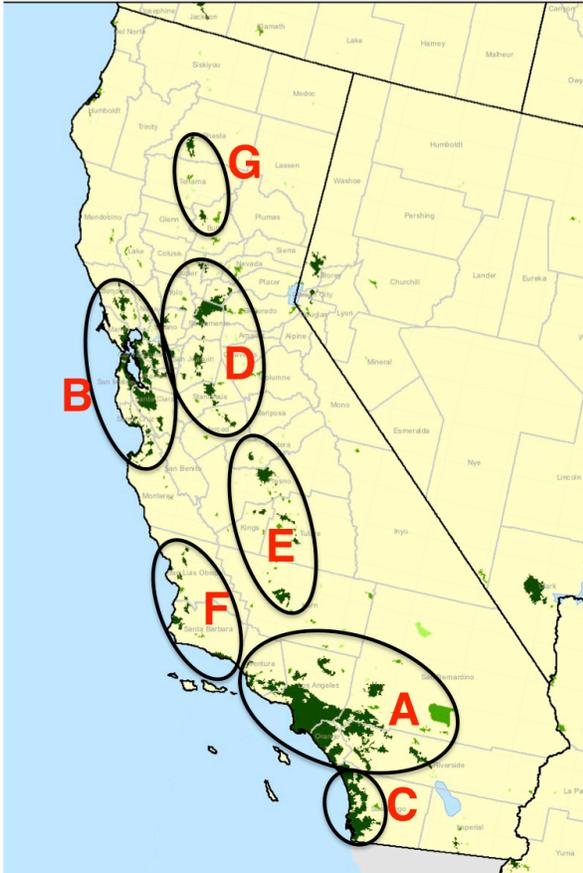


Figure 8. 1.Map of regional clusters within the H2TIMES model. Dark green areas show the spatial extent of each individual urbanized area.

8.1.2 H₂ infrastructure

The key central production technologies are coal gasification, natural gas reforming and biomass gasification, each of which have the option for carbon capture and sequestration (CCS). Once hydrogen is produced at these central plants, it can be delivered to refueling stations via two pathways: (1) transmission and distribution pipelines and (2) cryogenic hydrogen produced by a liquefier and then delivered by liquid hydrogen trucks. Compressed gas truck delivery is not considered as a long-term delivery solution because their low hydrogen capacity would necessitate too many deliveries. There are also onsite production options, where hydrogen is produced directly at the refueling station. Onsite stations produce hydrogen using steam reformers powered by natural gas (or biomethane) or electrolyzers powered by grid electricity (renewable electricity is also an option). These stations also store and dispense compressed hydrogen to vehicles.

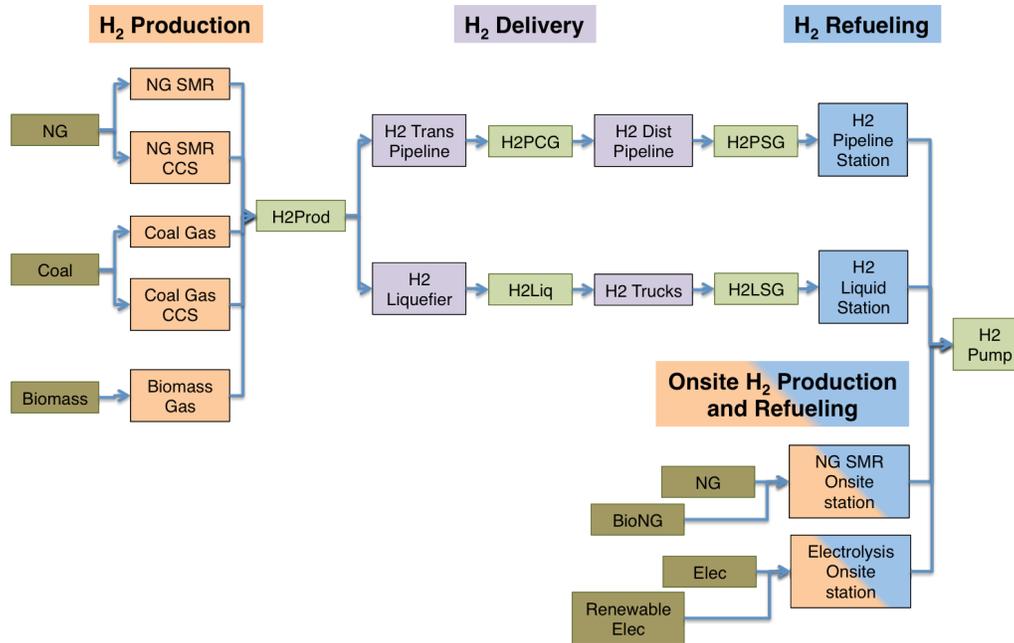


Figure 8. 2. Potential routes for hydrogen production and delivery available within the H2TIMES model to meet hydrogen demand at the refueling station.

Many of the key elements and components that make up hydrogen infrastructure have important economies of scale (e.g. central hydrogen production and liquefaction plants, pipeline networks and refueling stations). An exponential equation is typically used to model the cost of plants that exhibit economies of scale. However, the TIMES framework relies on linear programming, which does not allow costs to be expressed as exponential functions. There are two issues that arise with the typical TIMES approach to costs: (1) capital costs are proportional to capacity and (2) the model can invest in any amount of capacity, even unrealistically small sizes.

An innovative approach taken here, couples discrete investments with continuous capacity additions, to simulate declining costs with increasing scale (i.e. economies of scale). To do so, each technology that needs to simulate economies scale is split into two separate but necessary technologies - a fixed size component and a variable sized component. As a result, any technology represented with these two components will have a linear cost curve with a non-zero intercept (cost at zero capacity). Thus, at low capacity, the cost per unit of capacity is very large and declines until you reach the maximum plant size. This approach discourages investment at very small sizes and the linearization process leads to good agreement in costs between the exponential and linearized cost equations.

8.1.3 Renewable hydrogen and carbon intensity policy

A key element of the H2TIMES model is the inclusion of renewable and low-carbon policies to analyze their effects on the development of hydrogen infrastructure. Senate bill 1505 (SB1505) is a California state requirement that 33% of hydrogen supplied at refueling stations must be produced via renewable resources and have a 30% reduction in well to wheels emissions relative to gasoline. In H2TIMES, only hydrogen produced via biomass gasification, onsite electrolysis using renewable electricity and onsite steam reforming using biomethane can count towards the 33% renewable hydrogen mandate.

8.1.4 Base case modeling results

The *Base* case incorporates hydrogen regulations in effect in California. These include constraints imposed by SB1505, which requires that hydrogen achieve a 30% reduction in well-to-wheels (WTW) GHG emissions relative to gasoline (i.e. 30% reduction in EER-adjusted hydrogen (i.e. regulated) CI compared to gasoline) and also requires that 33% of hydrogen production come from renewable resources¹⁶ (i.e. renewable mandate). The *Base* case also does not allow for the use of coal without CCS.

Figure 8.3 shows that statewide by 2050, the majority of hydrogen production comes from coal gasification with CCS. Initially, hydrogen production comes exclusively from onsite natural gas reformers. Then in 2020, biomass gasification becomes the least-cost central production option and is generally built until the available resource is completely utilized by 2030. Since demand continues to grow, the next option is coal gasification with CCS (since coal gasification without CCS is prohibited in this scenario). It makes up the vast majority of additional generation after 2030. Central production makes up the vast majority of supply in the largest four regions, while onsite production is found in the smallest regions. In 2050, coal with CCS makes up 60% of total hydrogen production, while biomass makes up 15%.

There is significant growth in electrolysis in the 2040 to 2050 timeframe, due to the requirement for renewable hydrogen. The presence of the 33% renewable hydrogen mandate is satisfied in early years by biomass hydrogen, but the limited supply of biomass is constrained and additional renewable hydrogen production comes from renewable electrolysis and onsite reforming of biogas. In 2050, renewable electrolysis makes up 12% of total hydrogen production.

¹⁶ Resources that are used to meet the renewable portfolio standard (RPS) for electricity supply are not eligible to meet this requirement (i.e. electrolysis from grid electricity that has some renewables due to RPS does not contribute to this renewable requirement).

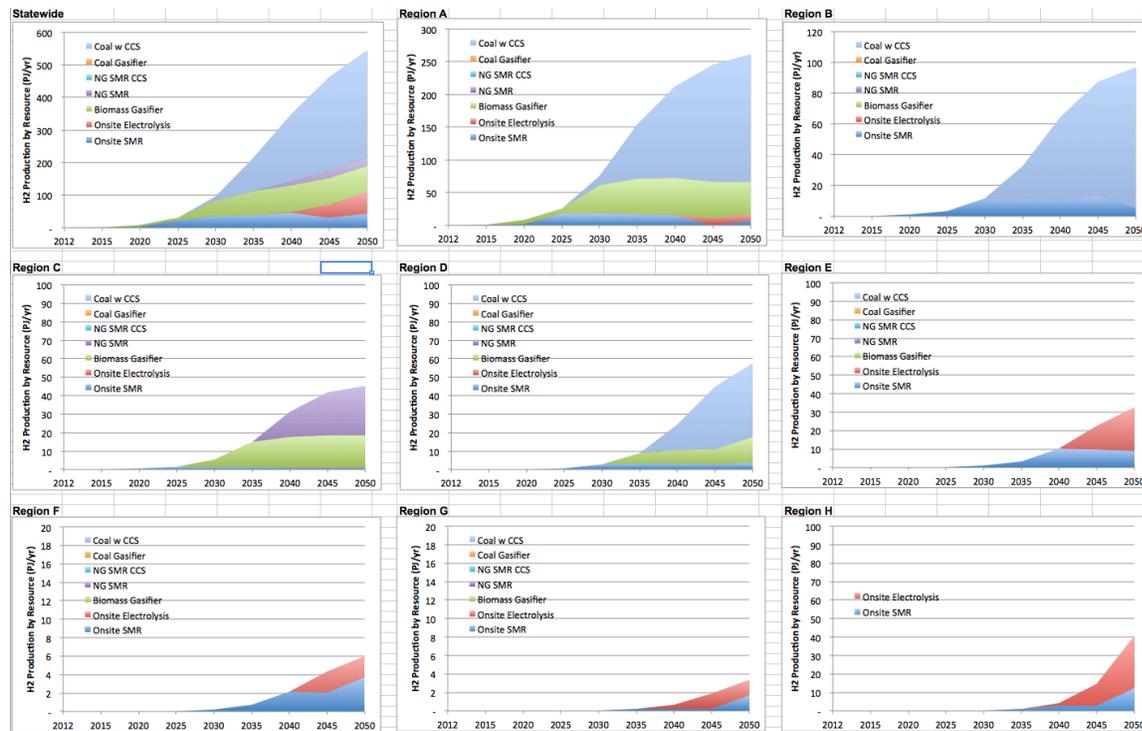


Figure 8. 3. Hydrogen production by production pathway for eight regional clusters and statewide for *Base* case scenario

The cost of hydrogen in the first two time periods (2012 and 2015) is set to match the results of an earlier study (Ogden and Nicholas 2011) and are quite high (\$24/kg and \$9/kg respectively) due to underutilization of small, high-cost early refueling stations. By 2020, the average cost of hydrogen has dropped to a little over \$5/kg and then declines further to around \$4/kg. In some of the small regional clusters where significant electrolysis occurs (i.e. clusters E-H), costs tend to spike after 2040 as a result of the high cost of electrolysis and renewable electricity, raising statewide average price from \$3.80/kg in 2040 to \$4.20/kg in 2050.

Overall, the regulated carbon intensity is relatively low, 4346 gCO₂e/kg¹⁷ in 2012 (60% below gasoline) and declines to 1626 g/kg in 2050 (85% below gasoline). Each of the pathways chosen by the model has relatively low carbon emissions. The highest carbon sources in this scenario are production hydrogen from natural gas (both onsite and central) (~50-61% reduction from gasoline). All other options are lower carbon including onsite electrolysis with renewable electricity (100% reduction from gasoline), biomass gasification (~95% below gasoline), and coal with CCS (~92% below gasoline). After 2025, the broad investment in coal with CCS lowers average carbon intensity significantly and in 2040, the addition of renewable electrolysis further reduces carbon intensity.

The H2TIMES model allows the user to alter input assumptions about resource and technology costs, technology characteristics and policy and societal constraints. Changes in these inputs will lead to differences in the model choices and the evolution of H₂ infrastructure pathways, their cost and emissions. Understanding these choices and how they are influenced by technical and policy options is a key element to this analysis and modeling tool.

¹⁷ Raw CI values can be obtained by multiplying the regulated CI values by the EER (2.3 in 2012, 2.0 in 2020, 1.8 in 2025 and 1.75 in 2035).

For additional details and sensitivity analysis on these results, the reader is directed to (Yang and Ogden 2013).

8.1.5 Future work

H2TIMES is built on the TIMES modeling framework and has the benefits as well as some of the limitations of that platform. H2TIMES is a standalone TIMES model that focuses exclusively on hydrogen infrastructure in California. It has been developed with an eye towards incorporating these elements into the full CA-TIMES model. This will allow for several improvements.

- Better integration with economy-wide policies, such as the renewable portfolio standard, statewide carbon reduction goals and cap and trade policies
- Better representation of resource availability and competition, especially for resources with limited availability such as biomass and renewable energy
- Endogenously calculated demand for hydrogen vehicles and fuels
- Improved understanding of the role of hydrogen in the larger energy economy

8.2 Consumer Vehicle Choice Model

8.2.1 Motivation

As described in the above sections, 4E (energy, economy, environment, engineering) models like TIMES, have been used as reliable tools for developing transition scenarios for climate change policies, as they can incorporate interdisciplinary subjects in a well-coordinated fashion. Though they can work well with economic and technological parameters, their function has been quite limited when representing behavioral parameters or consumer choices. Due to this deficiency, the investments in new technologies have been typically optimized for a homogenous market in the 4E models, which many times do not result in the decisions in line with real-life scenarios as it involves heterogeneity in consumer preferences. This factor becomes especially important when it comes to representing transportation sector, as consumer choice is one of the most important aspects of decision-making for light-duty vehicles.

An illustrative model, COCHIN-TIMES (COConsumer CHOice INtegration in TIMES) is developed involving only the light-duty vehicle sector for California. A vehicle choice model (MA³T: Market Allocation of Advanced Automotive Technologies) developed by Oak Ridge National Laboratory is used as a primary data source for consumer preference and utility data in the COCHIN-TIMES model (Zhenhong Liu 2010). The exogenously-defined end-use demand in the TIMES model (i.e. light-duty VMT) is disaggregated into 27 separate consumer groups and each consumer group is further divided into fixed number of slightly varying instances in order to capture heterogeneity and variation among car buyers.

8.2.2 Methodology

In order to include qualitative parameters into the cost-minimization framework, an appropriate variable should be introduced such that it captures the ‘perceived value’ of the technology, based on its attributes and the preferences of the consumer. This measure is defined as ‘utility’ in economic theory. The usage of utility as a preference scale has been extremely valuable in behavioral economics to understand the choice decisions of consumers (Simon 1959).

The proposed approach would be implemented by including the “market demand response” of consumer vehicle choice preferences extracted in the form of utility cost, from an existing vehicle choice model and brought into the TIMES model. In this case, for the vehicle choice model, MA³T (Market Allocation of

Advanced Automotive Technologies) model developed by Oak Ridge National Laboratories (Liu & Greene, 2010) is considered.

MA³T model is a nested multinomial-logit model developed by Oak Ridge National Laboratory for predicting the penetration rates of advanced vehicle technologies in the US, based on several input parameters such as vehicle attributes, regional market segmentation, energy prices and policies. The model has 1458 consumer segments throughout the country divided based on region, driving behavior, risk attitudes, home-charging availability, work-recharging availability, and parking availability.

The model uses these vehicle technology attributes to calculate utility cost, also termed as total generalized cost, (which is the weighted sum of utility cost attributes) for each technology in each market segment, given by the equation:

$$C_{ijkl} = \sum_z w_{zjkl} f_z(x_{zijkl}) \quad \text{(Equation x)}$$

Where,

- C_{ijkl} the total generalized cost of the vehicle technology ‘i’ in market segment ‘jkl’ (expressed in \$/vehicle), which is the weighted cost of functions of various input attributes.
- ‘w’ the weightage of input attribute ‘z’
- x_{zijkl} denotes the parameter values related to the input attribute ‘z’
- f_z the function computed from the parameter values of input attribute ‘z’
- ‘i’ the vehicle technology
- ‘jkl’ represents the nested market segment (region ‘j’, driving behavior ‘k’, and attitude ‘l’)

The generalized cost is divided into two major components: tangible and intangible costs. Tangible costs are direct costs from the vehicle that can be quantified easily, such as vehicle purchase price, and fuel costs. These costs are already incorporated into the existing structure of TIMES model. Intangible (i.e. non-monetary) costs are indirect costs that are not normally quantified for vehicles (shown in **Figure 8. 4**).

Figure 8. 4. Intangible Cost Components of MA³T consumer vehicle choice model

Intangible Cost Component	Description
Limited EV range	Cost of the consumer willing to spend on rental cars in a year based on their value of perceived anxiety due to range limitations of the owned vehicle. It is calculated based on the charge sustaining capability of the vehicle, how much or how long the consumer drives every day, and the attitude of consumer towards technology risk. This attribute monetizes the anxiety of the consumer when it comes to using limited range EVs.
Refueling station availability	Cost associated with the ease of access to recharging and refueling infrastructure. This cost captures the fuel availability and the ease at which the consumer can have access to refuel his vehicle. It depends on the fuel infrastructure itself, as well as the driving behavior of the consumer; if the consumer is prone to drive more, he or she has the need to refuel often. For example, in the year 2010, gasoline cars have an easier access to fueling stations than hydrogen cars, hence the gasoline cars have a lower cost associated with this compared to hydrogen cars.
Model Availability Cost	Cost associated with the number of vehicle models available for a given vehicle technology. It is assumed that, when the vehicle technology is new to the market and has limited sales, the models available to sell are also limited. So, if the user prefers to have a different model car in the given new vehicle technology, it may not be readily available until there is a sizeable market demand for it. This disutility is captured in this cost attribute..

New Technology Risk Premium	Cost calculated based on the willingness to accept the technology risk and the perceived riskiness of new vehicle technologies. The consumers in this model are divided into early adopters, early majority and late majority, based on their attitude towards technology risk. For example, when a certain vehicle technology is new to the market, early adopters are more willing explore them rather than the other two groups. They have a lesser “risk premium” cost compared to the other consumer groups.
Towing Capacity	Cost calculated based on the towing capacity of the vehicle technology. This cost is technology specific, and not consumer group specific. A few vehicle technologies, such as gasoline cars or diesel cars have a better towing capability than electric vehicles, for example. If a consumer prefers to have a better towing capacity for his vehicle, this cost attribute captures it.

These generalized cost terms in each consumer group nested segment are used to calculate the purchase probabilities for the particular vehicle technology for each consumer group. These indirect or intangible costs are included as an additional cost to the TIMES model. The schematic of the model is show in **Figure 8. 5.**

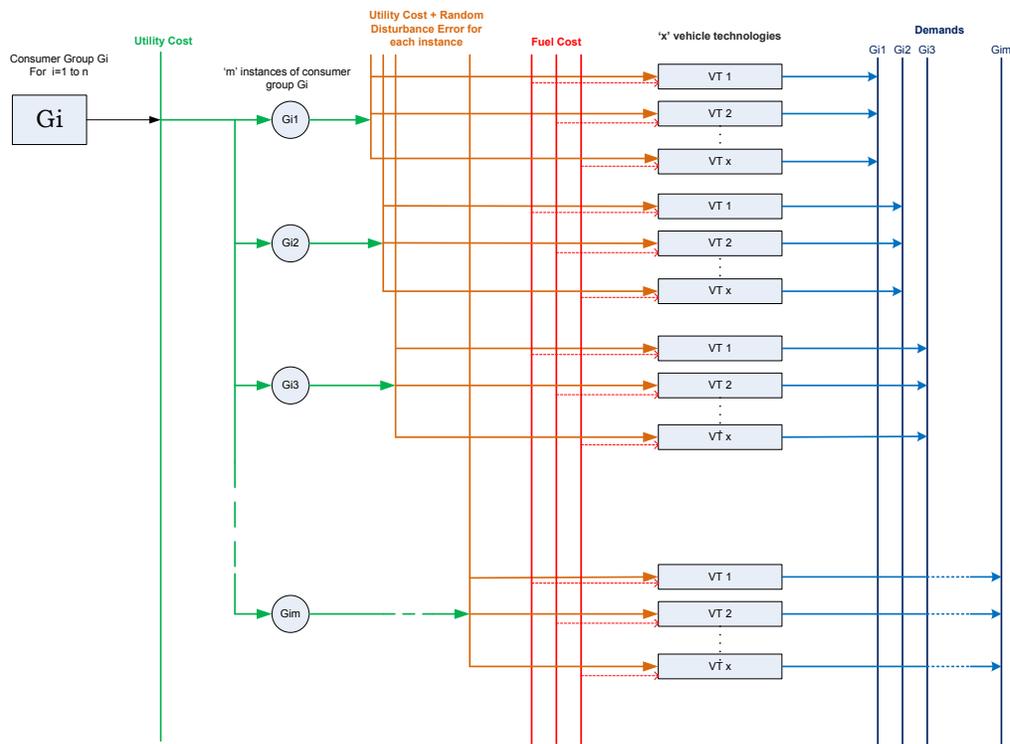


Figure 8. 5. Reference Energy System of COCHIN-TIMES model

The vehicle cost and efficiency projections, and fuel price projections are obtained from AEO 2012 data (U.S. EIA 2012). Total light-duty vehicle demand for California in terms of MVMT is extracted from VISION model (VISION 2011). In order to capture heterogeneity in consumer behavior, the demand is divided into different consumer groups. Twenty-seven different market segments are considered from the MA³T model as shown in **Figure 8. 6.** The state of California is divided into rural (outside MSA), suburban (Inside MSA-Suburb) and urban (Inside MSA-Central City) sub-regions, based on Census population data (US Census Bureau, 2010). The rural population constitutes about 5% of the total, suburban population constitutes about 80%, and the urban population constitutes about 15% of the total (Bureau 2010). These regions are further divided into people based on their attitude towards technology risk in terms of fixed percentage, namely, early adopters (16%), early majority (34%) and late majority (50%). The driving behavior is also captured in each group—they are divided based on their average

annual miles driven, namely, modest driver or low annual VMT (8656 miles), average driver or medium annual VMT (16068 miles) and frequent driver or high annual VMT (28288 miles) (Zhenhong Liu 2010). In addition to these consumer group divisions, each group is divided into ‘clones’ or ‘instances’ that have the same utility cost, but have an additional random disturbance term that follows cumulative extreme value distribution function. This is done to capture difference of choices within the same group.

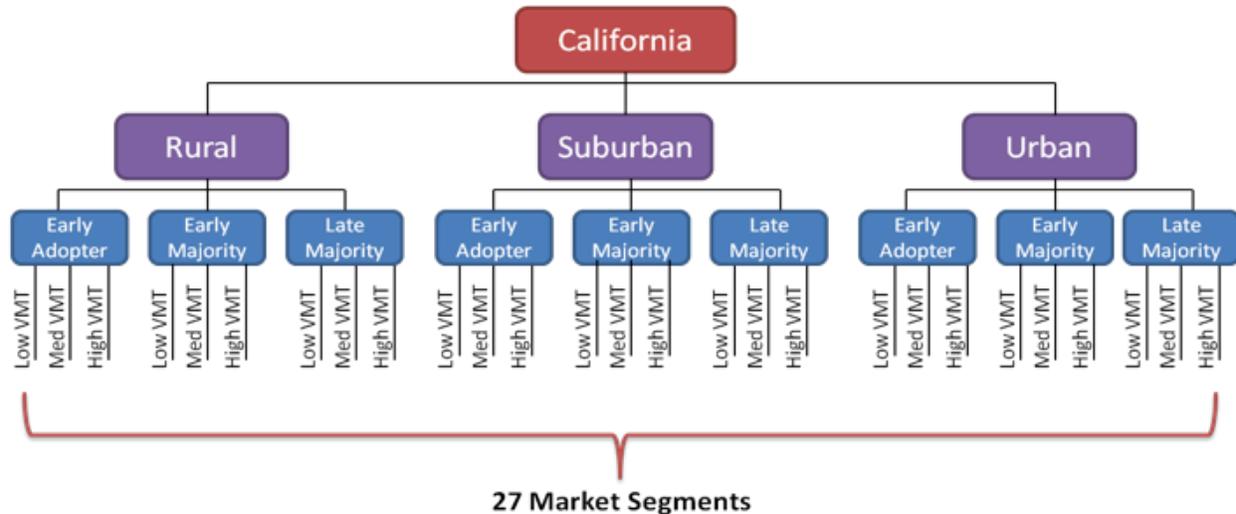


Figure 8. 6. Market Segments represented in the COCHIN-TIMES model

8.2.3. Preliminary Results

The model uses the least cost linear-programming approach to solve for the optimal vehicle technology for the society for a given year, so that the overall system cost is minimized. The standard TIMES model without consumer choice integration will minimize the net present value of owning a vehicle, including vehicle purchase cost, fuel cost and non-fuel expenses, throughout the model period with a discount rate of 5%.

In the COCHIN-TIMES model, where consumer choices are integrated, the utility costs are extracted from MA³T model for the respective consumer groups and vehicle technologies. In order to match the cost term to mimic the market demand response of the MA³T model, the utility costs are scaled to match the purchase probabilities of MA³T model.

A comparative analysis was performed between the reference case scenarios of the models, with and without vehicle consumer choice element in them. Except for the demand disaggregation and an additional utility cost term, the rest of the technological, economic, and environmental parameters are the same for both the models. **Figure 8. 7** and **Figure 8. 8** show the percentage distribution of new technology sales in both the models without any additional constraints. It is observed that in the TIMES model (without the consumer choice integration), the investments tend to follow the ‘winner takes all phenomenon’, where in the model invests in only ONE technology in any given year, here the model chooses diesel cars for the initial years followed by gasoline plug-in hybrids with 10 mile charge depleting range, and in the year 2035, hydrogen internal combustion engine (ICE) car is chosen (**Figure 8. 7**). This can be attributed to the model assumption that the hydrogen fuel price is expected to meet the future DOE goal of \$ 2/Kg in the year 2035 (Joseck 2010). Also, in the TIMES model, ‘penny switching’ occurs, where when one technology gets slightly cheaper, the entire model flips to that solution.

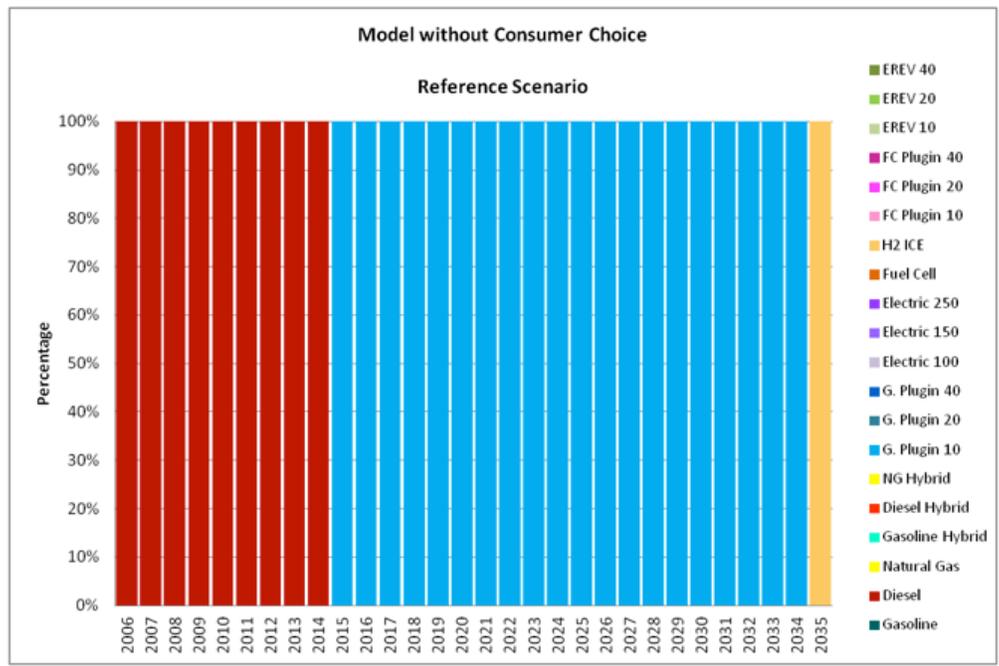


Figure 8. 7. Percentage distribution of new vehicle technology sales in TIMES: reference case scenario

In the COCHIN-TIMES model (Figure 8. 8), it is observed that the distribution of new technology investments are far diverse, mainly dominated by gasoline cars, followed by gasoline hybrids and gasoline plug-in cars in the later years. We can also see some level of market penetration of other advanced vehicle technologies, such as, extended range electric vehicles, fuel cell plugin hybrids, diesel hybrids, natural gas vehicles, and so on. This can be mainly attributed to the additional cost parameters in the utility cost that changes the dynamics of decision-making. The infrastructure cost, refueling cost and rental costs are very low for gasoline vehicles compared to diesel cars, and it is followed by hybrids for the initial years. When compared among the attitudes of consumer groups, early adopters seem to have more technology penetration, followed by early majority groups and late majority groups.

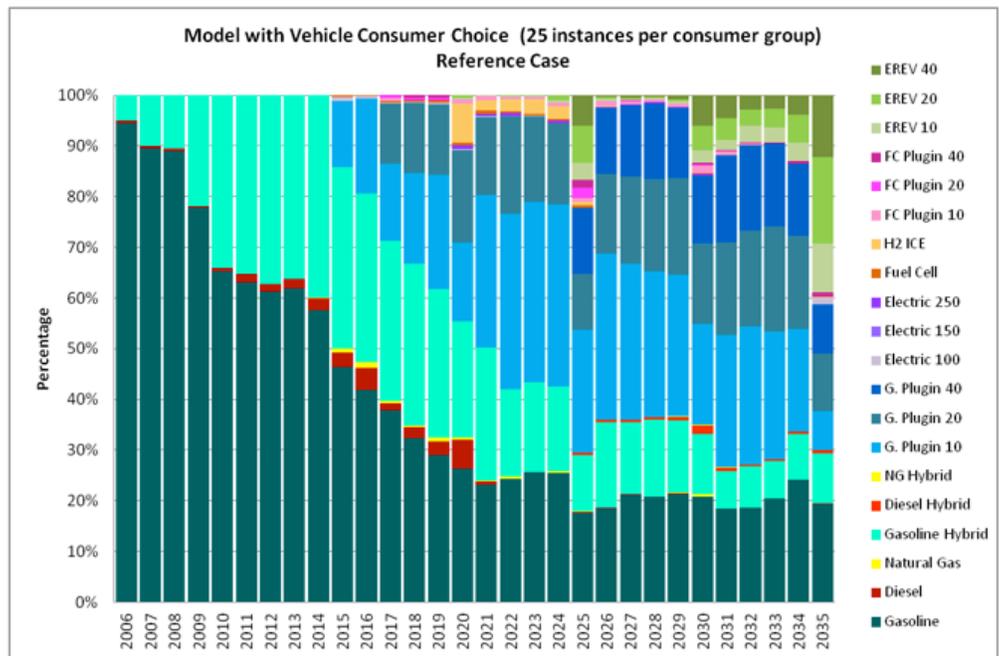


Figure 8. 8. Percentage distribution of new vehicle technology sales in COCHIN-TIMES: Reference Case Scenario

8.2.4. Future improvements needed

Based on the preliminary model results, we could conclude that segmenting the model into different consumer groups and including utility cost parameter has improved the diversity of the model results. There are a few limitations of the current COCHIN-TIMES model that we intend to improve in future work:

Currently there are no manufacturer limitations in the model, i.e. any limitations on the automobile production side. In real-life, automakers will not simply switch all vehicle production to advanced technologies in a very short timeframe, leaving behind the conventional cars. This explains the ease of market penetration in advanced vehicle technologies, especially in the plug-in hybrids and extended range vehicles in the later time periods. The future revisions in the model methodology can address this issue by representing a more realistic penetration pattern such as introducing learning or growth constraints. In reality, the automobile makers cannot make such a rapid switch to new technologies. It takes time for vehicle demand and manufacturing capacity to ramp up, and abandon old technologies such as gasoline cars. A realistic vehicle penetration rate can be modeled by calibrating with the historic projections of other vehicle choice models or by incorporating reasonable growth rate for those technologies.

At a given time, the utility costs extracted from MA³T model are fixed for a vehicle technology for a given consumer group. The future version of the COCHIN-TIMES model will improve on a more endogenized representation of the components of utility cost in a more realistic manner. It will also be benchmarked with other vehicle choice models on the technology penetration rates and will be calibrated.

For example, the model currently has fixed refueling and infrastructure disutility cost for all time period. This barrier is particularly important for the penetration of hydrogen and natural gas cars. In reality, further penetration of technologies depend on the infrastructure built, which is in turn based on the previous time periods' vehicle sales. Similarly, the CHOCHIN-TIMES model does not have any learning curves for batteries and fuel cells, i.e. costs of vehicle technology is exogenously specified and independent of scenario. Finding ways to endogenize these exogenous assumptions can significantly improve the quality of future results.

8.3 Plug-in Electric Vehicle Charging Scenarios

The environmental impact of plug-in electric vehicles (PEVs) will depend upon the electricity generation sources that are used to charge these vehicles. And as discussed in the electricity generation section, the mix of electric power plants and therefore the cost and emissions from electric generation all change as a function of timeslice. In addition, PEVs are parked more than 90% of the time so there is significant potential for flexibility in the timing of recharging these vehicles.

The goal of the electricity grid is to match supply and demand for electricity, continuously and in real-time. Elements on the grid that can respond to real-time changes and can help to achieve that supply demand balance can be classified as active elements, whereas those that cannot be called passive.

The traditional model has been to meet a continuously changing, but inflexible (i.e. passive) loads with an array of power plants, many of which are load-following (i.e. active). With the growth of passive intermittent renewables on the supply side, it is helpful to have active, flexible loads on the system to help maintain supply and demand balance.

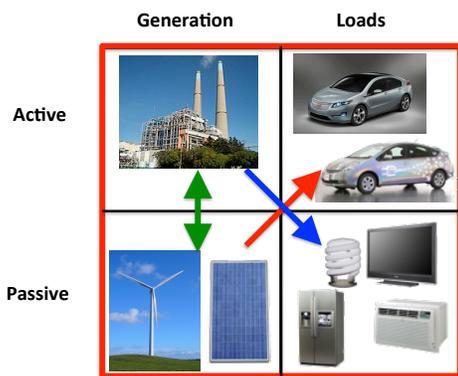


Figure 8. 9. Electricity system 2x2 matrix showing active and passive generation and loads.

One of the potential benefits of shifting vehicles from petroleum fuels to electricity is related to the improvements in grid operation that may result due to off-peak and flexible vehicle charging. Given the daily electricity demand profiles described in the last section (demand is higher in the afternoon and lowest at night), charging electric vehicles when other demands are lowest can improve overall capacity factors for power plants on the grid and lower the cost of electricity generation.

Flexibility in vehicle charging is also important. Electric vehicle owners have been shown to alter their charging patterns in response to time-of-use (TOU) prices. This responsiveness of PEV demand to utility incentives (in the figure below, off-peak pricing starts at midnight).

Charging Demand: Range of Aggregate Electricity Demand versus Time of Day⁴

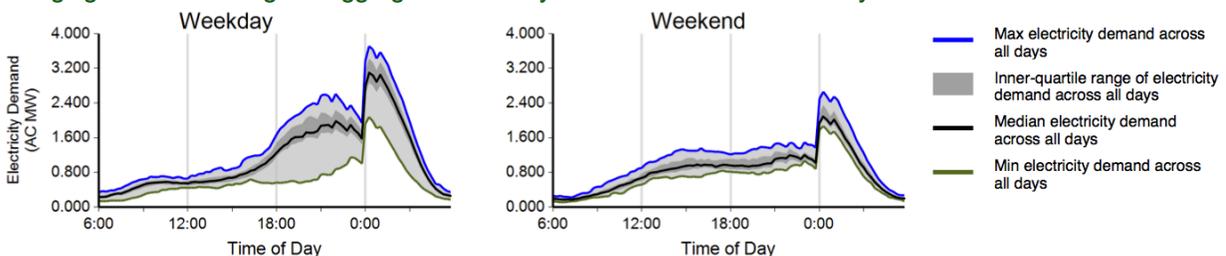


Figure 8. 10. Charging profiles for vehicles in California (ETEC 2012).

Modeling of electric vehicle charging should attempt to take the potential for these utility incentives to influence the pattern of vehicle charging. In TIMES, it is possible to set a fixed profile of charging by specifying the fraction of vehicle demand that occurs in each timeslice. The profile can come from real-world charging data (e.g. (Davies-Shawhyde 2011)) or from synthetic charging profiles. In this case, we choose to use a synthetic charging profile adapted from EPRI (EPRI and NRDC 2007) to fit our timeslice levels (3hr blocks). This profile (see **Figure 8. 11**) shows a symmetrical charging profile with highest levels at night (from 9pm until 3 am) and moderate levels of charging between 6pm and 9pm and also 3am to 6am. There is some charging also during work hours from 9am to 3pm due to workplace charging. Vehicle charging is lowest during commute hours (6-9am and 3-6pm), when presumably many vehicles are on the road.

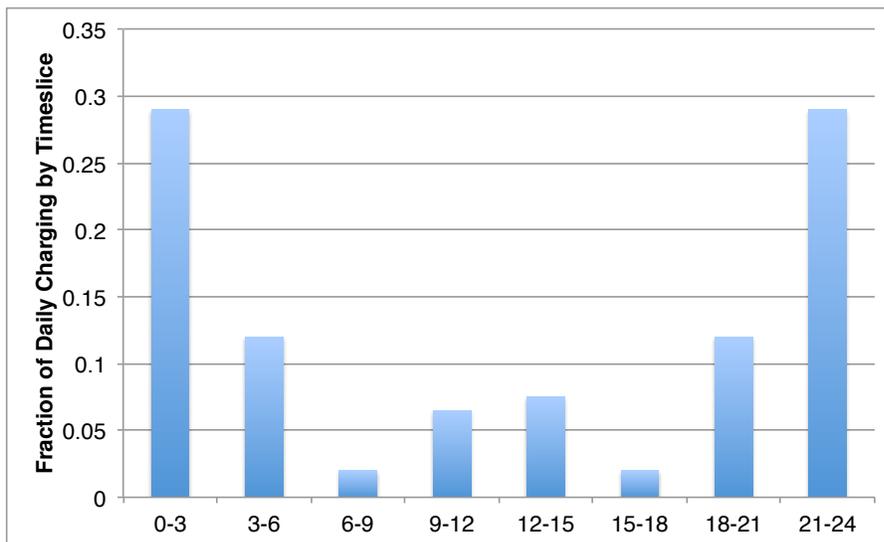


Figure 8. 11. Fixed vehicle charging profile based upon EPRI (2007).

It is also possible to allow the model to determine the best timeslices to charge vehicles with respect to overall system cost and operation. As previously discussed, allowing the model to shift charging can improve capacity factor of existing and future power plants and allow the model to build and operate lower cost baseload plants rather than more expensive peaking power plants. Another example is if there was an abundance of wind or solar generation during specific times of day, the model could choose to charge during these hours.

Since the TIMES model's objective function includes all of the capital and operating costs associated with operating electric power plants, the optimization will essentially minimize costs for the electric utility. While this approach ignores consumer behavior, preferences and convenience from the demand side, it is assumed that the utility can provide incentives (through time-of-use (TOU) or real-time (RTP) pricing). This can enable consumers' behavior to align with the cost-minimization approach exhibited by the model.

However, even with incentives, not all consumers will be able or willing to limit their charging to suite the best interests of the electric grid. Thus, the approach taken here is that some fraction of vehicle charging demands can be assumed to follow a fixed profile while the remaining charging demand can be optimized by the model to minimize costs and the fraction of fixed vs. variable charging can change over time.

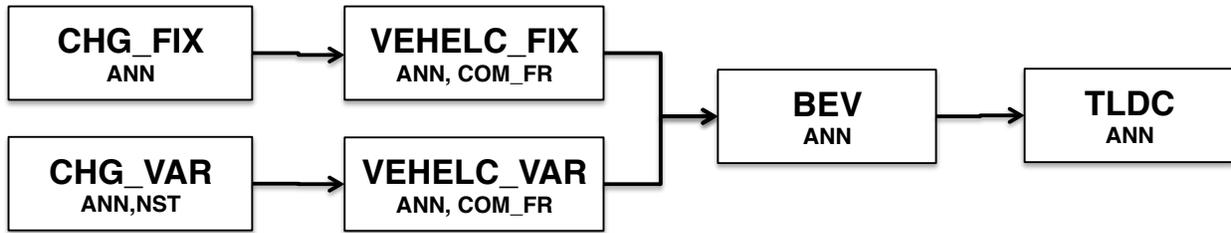


Figure 8. 12. Diagram of fixed and variable vehicle charging approach in TIMES

Figure 8. 12 shows the approach taken in the TIMES model to simulate both fixed and variable charging within the model. One constraint is that the total electricity over the course of the “day” is held constant, but charging can occur in any timeslice. The six seasonal “days” do not have the same quantity of electricity charging because they do not contain the same number of hours, and there are slight differences in driving patterns as a function of time of year (EIA).

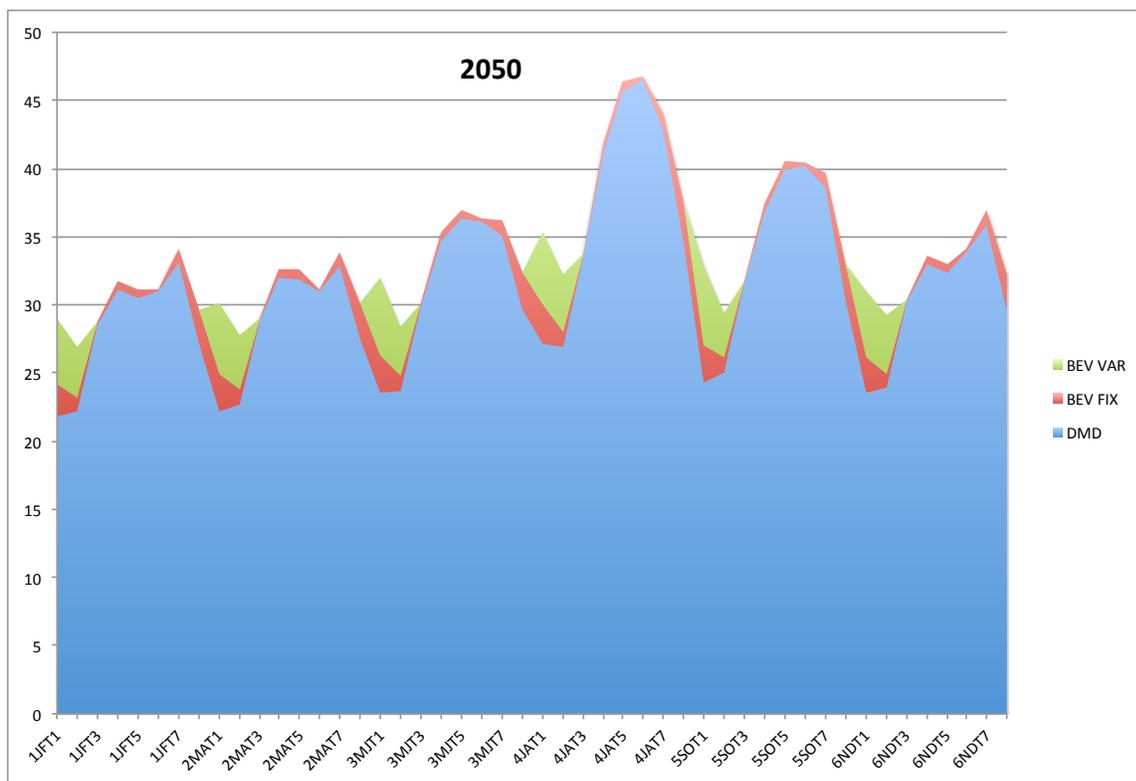


Figure 8. 13. Example of charging profiles of electric vehicles in 2050. DMD: other non-vehicle demand.

Figure 8. 13 shows some example results of this hybrid approach of fixed and variable vehicle charging. The figure shows non-vehicle electricity demand in blue, fixed profile charging in red and variable profile charging in green. While the majority of fixed charging occurs in off-peak (i.e. night time) timeslices (as per Figure 8. 11), all of the variable charging occurs in the off-peak timeslices.

9. CONCLUSIONS AND FUTURE WORK

California has taken the first steps towards strong policy action to reduce GHG emissions in the near-term (i.e. 2020). However, considerable uncertainty still exists about the options, resources and technologies that will be used to meet the longer-term goals of deep reductions in GHG emission in the longer term (i.e. 2050 and beyond). These reductions by 80% or more are needed if the state and the rest of the world are to adequately address and mitigate the worst impacts from climate change. California's policy suite has a near term focus but the frameworks are in place to extend these policies and increase stringency in order to meet the 80in50 target.

The major energy system transformation that will be needed to meet these goals is poorly understood, in terms of the resources and technologies that will need to be brought to bear, the policies that will induce these major shifts and the social aspects of major transformations. The CA-TIMES model is a bottom-up, technology-rich optimization model for California that focuses primarily on the first two areas: gaining a better understanding of the resources and technologies that can help reduce emissions and the policies that are needed to bring them about.

9.1 Key Conclusions

The main application of the model is to develop scenarios for how California's energy system could potentially evolve over the next several decades, in light of strong policies to reduce energy use and GHG emissions. Some robust conclusion of the modeling:

GHG target:

- Assuming that nuclear power and carbon capture and sequestration are not available as low carbon resources/technology options, it is difficult for the state to reduce total energy system emissions to meet the 80% GHG reduction target
- Even with a dramatic increase in end-use efficiency, decarbonization of the electric sector, and major shifts to electricity, hydrogen and biofuels in transportation a 62% reduction in emissions from 1990 level is seen in the primary GHG scenarios.
- Availability of nuclear power plants, CCS, and/or additional biomass and renewable electricity resources all help to further reduce emissions.
- Among all GHG scenarios, emissions in 2035 range from 270 to 340 MMTCO_{2e}, though many of these scenarios do not meet the 2050 target.

Electric sector:

- Generation from solar and wind are prevalent in the GHG scenarios, producing 66% to 80% of generation in 2050 in most GHG scenarios. This level of wind and solar penetration requires very large investments and ramp up of capacity in California and neighboring states.
- If nuclear power and/or natural gas with CCS is available then the reliance on intermittent renewables is lessened.
- In all GHG scenarios the carbon intensity of electricity falls dramatically (from around 360 g/kWh to between 3 and 57 g/kWh) by 2050.

Transportation sector:

- Even with travel demand growth, transportation fuel demand drops in all GHG scenarios (around 26% in most scenarios from 2010 to 2050 to around 20 billion GGE) due to significant efficiency improvements in all transport sectors.
- Battery and fuel cell powered vehicles make up between 50% and 96% of light duty vehicles fleet in most scenarios and the LDV fuel economy climbs as high as 115 MPGGE in many scenarios.

- The mix of fuels changes dramatically from 95% petroleum based fuels in 2050 to around 40-50% in 2050. The remaining fuels are biomass, electricity and hydrogen.
- Biomass is almost exclusively used to make biofuels, though the expected quantity available for California is only around 7-8 billion GGE.
- Coupled with CCS, biofuels production can provide significant offsets to petroleum usage (or other hard to mitigate emissions).

Residential and commercial sectors:

- Residential and commercial sectors will increasingly rely on low carbon electricity sources under the GHG scenarios. Electricity use in 2050 makes up between 69 to 75% of sector final energy use in the GHG scenarios compared to 40-50% in the Reference scenario.
- Sector-wide weighted efficiency is a factor of 2.4x higher in 2050 than 2010 for the commercial sector and 2.6x higher in the residential sector.

Energy system and GHG mitigation costs:

- Achieving a 62% reduction in GHG emissions in 2050, as seen in the two primary GHG scenarios requires cumulative additional annual expenditures (above spending in the BAU scenarios) of between \$390 billion to \$1.6 trillion between 2010 and 2050. 2013 gross state product is \$2 trillion.
- The cost of emissions reduction in GHG scenarios will vary depending on which BAU scenario is being compared. The average costs of cumulative GHG reduction from the BAU scenario varies from -\$110/tonneCO_{2e} to \$220/tonneCO_{2e}. The average costs of cumulative GHG reduction from the BAU-LoVMT scenario varies from \$100/tonneCO_{2e} to \$615/tonneCO_{2e}.
- Making more low cost, low carbon resources available for use in California will lower mitigation costs (as seen by GHG-S-CCS, GHG-S-Nuclear, GHG-S-HiRenGrowth, GHG-S-HiBio scenarios).
- Electricity sector costs account for the biggest cost differential between the BAU and GHG scenarios. These costs ramp up after 2020 to nearly \$30 billion/yr in 2050.
- The difference in fuel supply costs between the GHG and BAU scenarios is relatively low (only \$6 billion/yr in 2050) since high efficiency and alternative fuels leads to displacement of high priced petroleum fuels.

9.2 Future work

The CA-TIMES model is a continually evolving model and there are many areas where the model could be improved. Future model improvements are already being planned but implementation will depend on funding and resource availability. Some high-priority research areas include:

Near-term (Next year)

- Criteria pollutant emissions and concentration changes from climate policies: PhD candidate Christina Zapata is working on determining emission changes from regulations and energy models for both transport and upstream emissions to access complimentary health benefits from air quality concentrations changes and spatially resolve exposure changes.
- Water use impacts of future transport fuels: role of California's climate policy & national biofuel policies: using scenarios projected from CA-TIMES to analyze lifecycle water use of current and future transport fuel consumptions and evaluate impacts & formulate mitigation strategies for the state at the watershed scale

Medium-term (1-3 years)

- Incorporate some spatiality for certain parts of the model (i.e. transportation) to account for the locations of criteria emissions and/or fuel infrastructure requirements
- Natural gas in transportation (technology characterization, NG infrastructure, NG costs in demand sectors)
- Apply the model to support great number of more detailed policy analysis, particularly tangible policies implemented/considered by CARB and CEC
- Model the industrial sector endogenously

Long-term (1-5 years)

- Better represent consumers' behaviors and business investment decisions in a non-linear optimization model. We plan to incorporate the insights we learn from the consumer vehicle choice model (COCHIN-TIMES) into the core CA-TIMES model. But more research is still critically needed to better understand and implement consumers' behaviors and business investment decisions to improve model
- Continue to explore geographic/spatial modeling within the integrated assessment framework to improve critical infrastructure investment decisions such as hydrogen infrastructure, CCS, renewable penetration, etc.
- Expand the (electricity) model to include the Western Electricity Coordinating Council (WECC) region in order to better model electricity imports and exports and the reliability and pricing of the electricity system under the BAU and GHG scenarios
- Incorporate sustainability constraints such as water availability, siting restrictions related to land use or environmental impacts, etc into the model.
- Incorporate the XLRM decision analysis framework to conduct more formalized uncertainty and decision analysis:
 - *X: exogenous factors or uncertainties that are outside the control of managers;*
 - *L: management responses or levers that can be implemented by managers;*
 - *R: models that describe the relationships between uncertainties and levers; producing*
 - *M: metrics of performance that can be used to evaluate various management options.*

10. REFERENCES

- AEO (2012). "Annual Energy Outlook Analysis and Projections."
- AEO (2013). Annual Energy Outlook Analysis and Projections.
- Allan, A. (2011). Renewable Transportation Fuel for California's Electric-Drive Vehicles. MS, University of California, Davis.
- Amtrak (2010). Amtrak Fact Sheet, Fiscal Year 2010, State of California.
- Argonne (2009). Multi-Path Transportation Futures Study: Vehicle Characterization and Scenario Analyses, Argonne National Laboratory: Energy Systems Division.
- Bainm, R. (2007). Worldwide Biomass Potential: Technology Characterizations (NREL/MP-510-42467), National Renewable Energy Laboratory.
- Bernstein, M., R. Lempert, et al. (2000). "The Public Benefit of California's Investments in Energy Efficiency."
- Bernstein, M., R. Lempert, et al. (2000). The Public Benefit of California's Investments in Energy Efficiency, RNAD. Prepared for the California Energy Commission.
- BTS. (2010). "Bureau of Transportation Statistics: Aviation." from http://www.transtats.bts.gov/databases.asp?Mode_ID=1&Mode_Desc=Aviation&Subject_ID2=0.
- CA DOF. (2013). "California Statistical Abstract." from http://www.dof.ca.gov/html/fs_data/STAT-ABS/Toc_xls.htm.
- CAISO (2013). CAISO Daily Renewables Watch.
- California Department of Finance (2013). Population Projections, 2010-2060.
- California Department of Finance (2013). Report P-1: Summary Population Projections by Race/Ethnicity and by Major Age Groups.
- CARB (2008). Personal Communications with Ben Sharpe. D. McCollum, California Air Resources Board.
- CARB (2009). AB 32 Climate Change Scoping Plan Document.
- CARB (2009). Attachment B: 2050 Greenhouse Gas Emissions Analysis: Staff Modeling in Support of the Zero Emission Vehicle Regulation. Sacramento, CA, California Air Resources Board.
- CARB (2009). California's 1990-2004 Greenhouse Gas Emissions Inventory and 1990 Emissions Level, Technical Support Document, California Air Resources Board.
- CARB (2010). Documentation of California's 2000-2008 GHG Inventory - Index, California Air Resources Board.
- CARB. (2011). "EMFAC Software." from <http://www.dot.ca.gov/hq/env/air/pages/emfac.htm>.
- CARB (2013). California's Greenhouse Gas Inventory by Sector & Activity. Sixth Edition: 2000 to 2011, California Air Resources Board.
- CBC (2009). California Biomass Facilities Reporting System (BFRS), California Biomass Collaborative, University of California-Davis.
- CCST (2011). California's Energy Future e The View to 2050: Summary Report, California Council on Science and Technology.
- CCST (2012). California's Energy Future - Portraits of Energy Systems for Meeting Greenhouse Gas Reduction Requirements, California Council on Science and Technology.
- CEC (2007). California Energy Demand 2008 - 2018: Staff Revised Forecast, Final Staff Forecast, 2nd Edition, publication # CEC-200-2007-015-SF2, California Energy Commission.
- CEC (2009). California Energy Demand 2010-2020 Adopted Forecast, California Energy Commission.
- CEC (2010). Energy Almanac, Weekly Fuels Watch Report, California Energy Commission.
- CEC (2010). Energy Facility Status, Power Plant Projects Since 1996, California Energy Commission.
- CEC (2010). Transportation Energy Forecasts and Analyses for the 2009 Integrated Energy Policy Report (CEC-600-2010-002-SF), California Energy Commission.
- CEC (2011). 2011 Integrated Energy Policy Report, California Energy Commission.
- CEC (2012). CA Energy Almanac: Total Electricity System Power California Energy Commission.

California TIMES (CA-TIMES) Modeling of California Energy and Climate Policies (Draft Final Report for Review and Comments)

- CPUC (2009). 33% Renewables Portfolio Standard Implementation Analysis Preliminary Results, California Public Utilities Commission.
- CPUC. (2011). "California Renewables Portfolio Standard (RPS) - Current Renewable Procurement Status." 2011, from <http://www.cpuc.ca.gov/PUC/energy/Renewables/index.htm>.
- EESI (2007). Hybrid Buses Costs and Benefits, Environmental and Energy Study Institute.
- EIA (2008). 2005 Residential Energy Consumption Survey, Energy Information Administration.
- EIA. (2010). "Natural Gas Delivered to Consumers in California." from <http://www.eia.gov/dnav/ng/hist/n3060ca2a.htm>
- EIA (2010). NEMS Model Files and Assumptions to the Annual Energy Outlook. U.S. Department of Energy, Washington, DC, Energy Information Administration.
- EIA (2010). Petroleum Navigator. Energy Information Administration. U.S. Department of Energy, Washington, DC, Energy Information Administration.
- EIA (2011). Annual Energy Review, U.S. Energy Information Administration.
- EIA (2011). Form EIA-923 Data - Electric Power Plant Data, Energy Information Agency, US Department of Energy.
- EIA (2012). Annual Energy Outlook, United States Department of Energy.
- EIA (2013). Annual Energy Outlook 2013, U.S. Energy Information Administration.
- EIA (2013). Residential Energy Consumption Survey (RECS), U.S. Energy Information Administration.
- EIA. (2013). "State Profiles and Energy Estimates." from <http://www.eia.gov/state/?sid=US>.
- EPA-DOT-CARB (2010). Interim Joint Technical Assessment Report: Light-Duty Vehicle Greenhouse Gas Emission Standards and Corporate Average Fuel Economy Standards for Model Years 2017-2025, U.S. Environmental Protection Agency - Office of Transportation and Air Quality, U.S. Department of Transportation - National Highway Traffic Safety Administration, California Air Resources Board.
- GEA (2012). Global Energy Assessment: Toward a Sustainable Future, International Institute for Applied Systems Analysis and Cambridge University Press.
- Geller, H., P. Harrington, et al. (2006). "Policies for increasing energy efficiency: Thirty years of experience in OECD countries." *Energy Policy* **34**: 556-573.
- Gillingham, K. and K. Palmer (2013). Bridging the Energy Efficiency gap: Insights for Policy from Economic Theory and Empirical Analysis. Washington, DC, Resources For the Future.
- Greenblatt, J. B. (2013). Estimating Policy-Driven Greenhouse Gas Emissions Trajectories in California: The California Greenhouse Gas Inventory Spreadsheet (GHGIS) Model, Lawrence Berkeley National Laboratory.
- Greene, D., J. German, et al. (2009). Fuel Economy: The Case for Market Failure. *Reducing Climate Impacts in the Transportation Sector*. D. S. a. J. Cannon, Springer Science.
- Greene, D. L. (2011). "Uncertainty, loss aversion, and markets for energy efficiency." *Energy Economics* **33**(4): 608-616.
- H2A (2005). Hydrogen Production Cost Spreadsheets, Department of Energy Hydrogen Analysis Team (H2A).
- ICF (2010). Modeling of Greenhouse Gas Reduction Measures to Support the Implementation of the California Global Warming Solutions Act (AB32): Energy 2020 Model Inputs and Assumptions, ICF Consulting Canada and Systematic Solutions, Inc.
- IEA (2010). Energy Technology Perspectives, International Energy Agency.
- IEA (2012). Energy Technology Perspectives 2012 - Pathways to a Clean Energy System, International Energy Agency.
- INFORM. (2007). "Diesel School Buses: Health Effects and Opportunities for Change." from <http://www.informinc.org/pages/research/sustainable-transportation/fact-sheets/118.html>.
- IPCC (2007). *IPCC Fourth Assessment Report: Climate Change 2007 - The Physical Science Basis*. Cambridge, Intergovernmental Panel on Climate Change, Cambridge University Press.
- ITRON (2006). California Commercial End-Use Survey (CEUS).

- Jonathan Hughes, C. K., Daniel Sperling (2008). "Evidence of a Shift in the Short-Run Price Elasticity of Gasoline Demand." *Energy* **29**(1): 113-134.
- Kesicki, F. and G. Anandarajah (2011). "The role of energy-service demand reduction in global climate change mitigation: Combining energy modelling and decomposition analysis." *Energy Policy* **39**(11): 7224-7233.
- Kreutz, T. G., E. D. Larson, et al. (2008). Fischer-Tropsch Fuels from Coal and Biomass. Princeton Environmental Institute, Princeton University.
- Long, J. C. S., M. John, et al. (2011). *California's Energy Future - The View to 2050*, California Council on Science and Technology.
- Loulou, R. and M. Labriet (2008). "ETSAP-TIAM: the TIMES integrated assessment model Part I: Model structure." *CMS* **5**: 7-40.
- Loulou, R. and D. Lavigne (1996). MARKAL Model with Elastic Demands: Application to Greenhouse Gas Emission Control. *Operations Research and Environmental Management*. C. Carrara and A. Haurie. the Netherlands, Kluwer Academic Publishers: 201- 220.
- Loulou, R., U. Remne, et al. (2005). Documentation for the TIMES Model. Part I, Energy Technology Systems Analysis Programme.
- Loulou, R., U. Remne, et al. (2005). Documentation for the TIMES Model. Part II, Energy Technology Systems Analysis Programme.
- Matthew Kromer, J. H. (2007). Electric Powertrains: Opportunities and Challenges in the U.S. Light-Duty Vehicle Fleet, Massachusetts Institute of Technology.
- McCarthy, R. (2009). *Assessing Vehicle Electricity Demand Impacts on California Electricity Supply* (PhD Dissertation). PhD, University of California, Davis.
- McCarthy, R., C. Yang, et al. (2008). California energy demand scenario projections to 2050, Institute of Transportation Studies, University of California, Davis, Research Report UCD-ITS-RR-08-11.
- McCollum, D., C. Yang, et al. (2012). "Deep greenhouse gas reduction scenarios for California - Strategic implications from the CA-TIMES energy-economic systems model." *Energy Strategy Reviews* **1**(1): 19-32.
- McCollum, D. L. and C. Yang (2009). "Achieving deep reductions in U.S. transport greenhouse gas emissions: scenario analysis and policy implications." *Energy Policy* **37**(12): 5580-5596.
- NAS (2013). Transitions to Alternative Vehicles and Fuels, National Academy of Sciences.
- Nelson, J., J. Johnston, et al. (2012). "High-resolution modeling of the western North American power system demonstrates low-cost and low-carbon futures." *Energy Policy* **43**(0): 436-447.
- NREL (2013). System Advisor Model. <https://sam.nrel.gov/>.
- NTD (2005). "National Transit Database."
- NTD. (2010). "National Transit Database." from <http://www.ntdprogram.gov/ntdprogram/data.htm>.
- ORNL. (2013). "Freight Analysis Framework Data Tabulation Tool." from <http://faf.ornl.gov/fafweb/Extraction0.aspx>.
- Parker, N. C., Q. Hart, et al. (2010). "Development of a biorefinery optimized biofuel supply curve for the Western United States." *Biomass & Bioenergy* **34**(11): 1597-1607.
- RETI (2009). Renewable Energy Transmission Initiative: Phase 1B Final Report.
- Rufo, M. and A. North (2007). "Assessment of Long-Term Electric Energy Efficiency Potential in California's Residential Sector."
- Rufo, M. W. and A. S. North (2007). Assessment of Long-Term Electric Energy Efficiency Potential in California's Residential Sector, California Energy Commission, PIER Energy-Related Environmental Research. CEC-500-2007-002.
- Terry Barker, A. D., Jonathan Rubin (2009). "The macroeconomic rebound effect and the world economy." *Energy Efficiency* **2**: 411-427.
- U.S. DOE (2008). Hydrogen Analysis (H2A) Project, U.S. Department of Energy.
- U.S. EIA (2011). EIA - Technology Forecast Updates – Residential and Commercial Building Technologies – Reference Case, Navigant Consulting Inc. prepared for U.S. Energy Information Administration.

California TIMES (CA-TIMES) Modeling of California Energy and Climate Policies (Draft Final Report for Review and Comments)

- U.S. EIA. (2012). "2009 Residential Energy Consumption Survey (RECS)." from <http://205.254.135.7/consumption/residential/>.
- U.S. EIA (2013). Annual Energy Outlook. Washington DC, U.S. Energy Information Administration.
- U.S. EPA (2003). Clean Fuel Options for Heavy-Duty Diesel Trucks and Buses, United States Environmental Protection Agency.
- U.S. EPA (2006). EPA U.S. National MARKAL Database: Database Documentation, United States Environmental Protection Agency.
- U.S. EPA (2008). U.S. Nine Region MARKAL Database Documentation, Air Pollution Prevention and Control Division, National Risk Management Research Laboratory, U.S. Environmental Protection Agency.
- UCS. (2007). "Hybrid Watchdog: Hybrid Transit Buses Are They Really Green?", from <http://www.hybridcenter.org/hybrid-transit-buses.html>.
- Wei, M., J. H. Nelson, et al. (2013). "Deep carbon reductions in California require electrification and integration across economic sectors." Environmental Research Letters **8**(1): 014038.
- WGA (2009). Western Renewable Energy Zones - Phase 1 Report, Western Governor's Association.
- Williams, J. H., A. DeBenedictis, et al. (2012). "The technology path to deep greenhouse gas emissions cuts by 2050- the pivotal role of electricity." Science **335**(6).
- Yang, C. and J. Ogden (2007). "Determining the lowest cost hydrogen delivery mode." Int J Hydrogen Energ. **32**(2): 268-286.
- Yeh, S., A. Farrell, et al. (2008). "Optimizing U.S. Mitigation Strategies for the Light-Duty Transportation Sector: What We Learn from a Bottom-Up Model." Environmental Science & Technology **42**(22): 8202–8210.
- Yeh, S. and D. Sperling (2013). "Low carbon fuel policy and analysis." Energy Policy **56**: 1-4.

APPENDIX A. COST OF ELECTRICITY GENERATION TECHNOLOGIES

A number of cost analyses and modeling studies from well-known and respected sources have different assumptions about the current and future costs of electricity generation technologies. These cost assumptions were compiled as a point of comparison to better understand the range of potential future costs. Given that CA-TIMES chooses the generation mix based upon minimizing system cost, these ranges can also provide reasonable set of assumptions for sensitivity analyses of electricity mix under uncertainty about future plant capital costs.

The major studies/sources that are used are a 2012 Black and Veatch study for NREL (which is used as input to the NREL ReEDs and UC Berkeley SWITCH model), NREL’s Renewable Energy Future’s study, NEMS/AEO for 2012 and 2013.

Each power plant type is compared in a graph of future capital costs projections. It is important to note that costs are all in 2010\$ and cost in CA-TIMES are inflated with capital cost multipliers for the California region based upon cost multipliers from NEMS (2013).

Cost multipliers for California Power Plants

Power Plant	Cost Adjustment
Coal w/ CCS	1.12
Conv. NGCT	1.24
Adv. NGCT	1.29
Conv. NGCC	1.25
Adv. NGCC	1.24
Adv. NGCC w/CCS	1.15
Fuel Cell	1.03
Nuclear	1
Biomass	1.08
MSW	1.06
On-shore Wind	1.12
Off-shore Wind	1.05
Solar Thermal	1.13
Solar PV	1.11

Cost multipliers for wind, solar PV and solar thermal in other regions

	Solar PV	Solar Thermal	Wind
Southwest (AZ/NW)	0.99	0.99	1.03
Northwest (BC/ID,NV, OR,UT,WA,WY)	0.99	0.99	1.05

Thermal Power Plants
Nuclear

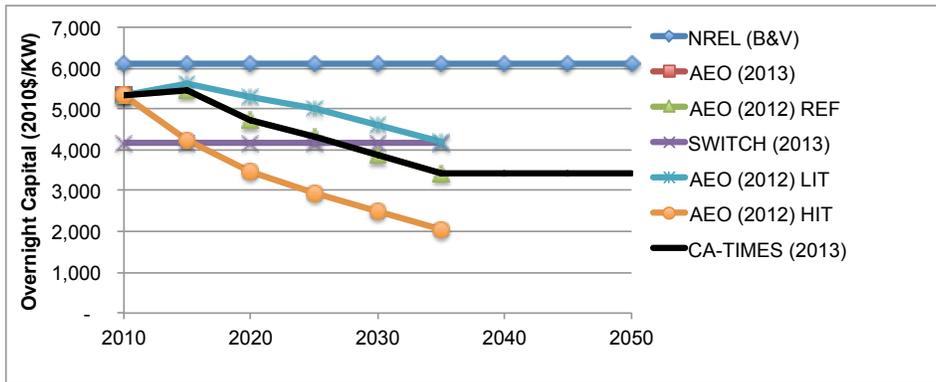


Figure A6. Cost comparison for Nuclear Light Water Reactor (LWR) Power Plants for CA-TIMES and other studies

Natural Gas Power Plants

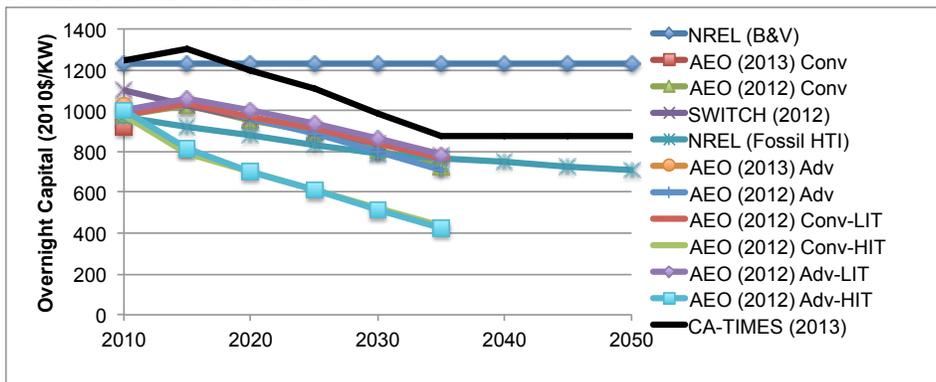


Figure A7. Cost comparison for Natural Gas Combined Cycle (NGCC) Power Plants for CA-TIMES and other studies

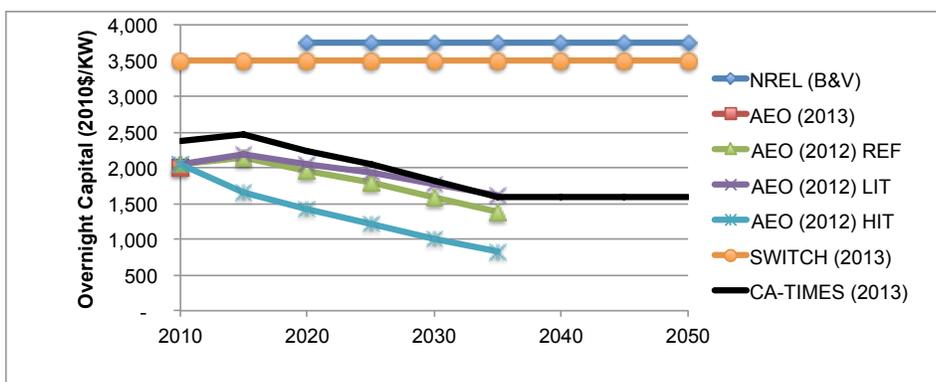


Figure A8. Cost comparison for Natural Gas Combined Cycle Power Plants with CCS (NGCC w/ CCS) for CA-TIMES and other studies

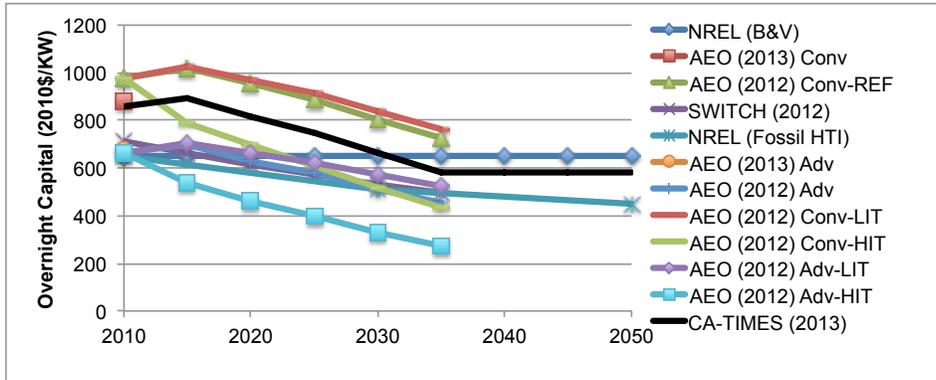


Figure A9. Cost comparison for Natural Gas Combustion Turbine (NGCT) Power Plants for CA-TIMES and other studies

Renewable Power Plants
Biogas Power Plants

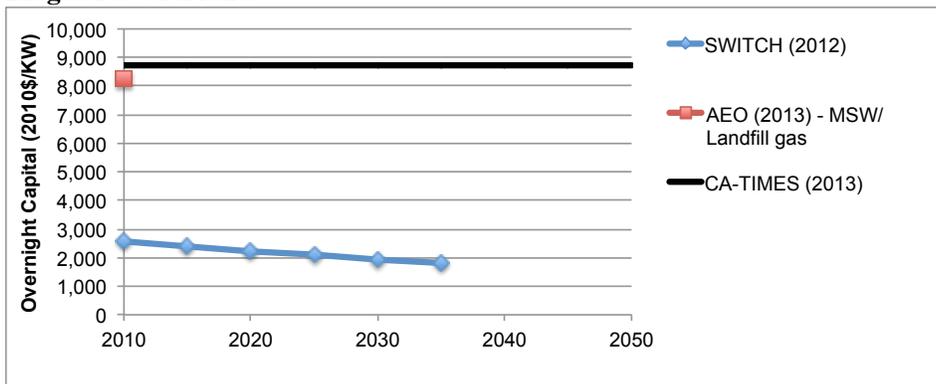


Figure A10. Cost comparison for Biogas Power Plants for CA-TIMES and other studies

Biomass Combined Cycle Power Plants

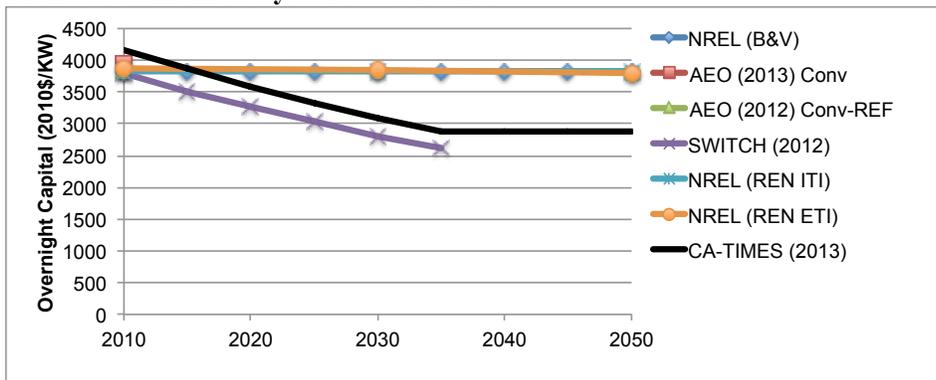


Figure A11. Cost comparison for Biomass Integrated Gasification Combined Cycle (Biomass IGCC) Power Plants for CA-TIMES and other studies

Hydroelectric Power Plants

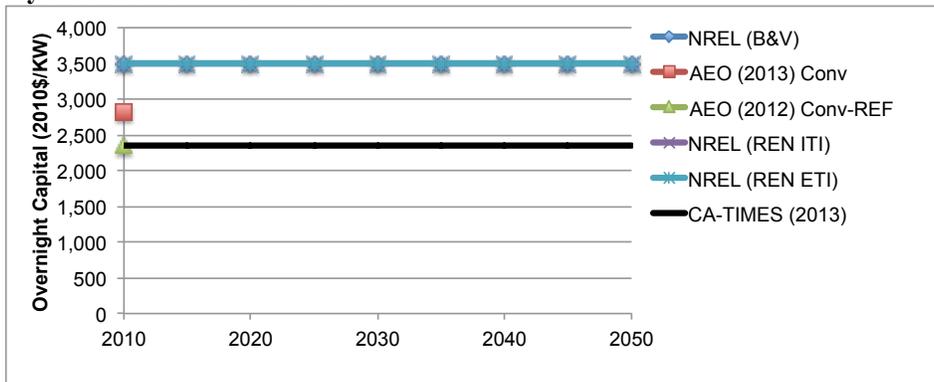


Figure A12. Cost comparison for Hydropower Power Plants for CA-TIMES and other studies

Ocean Tidal Power Plants

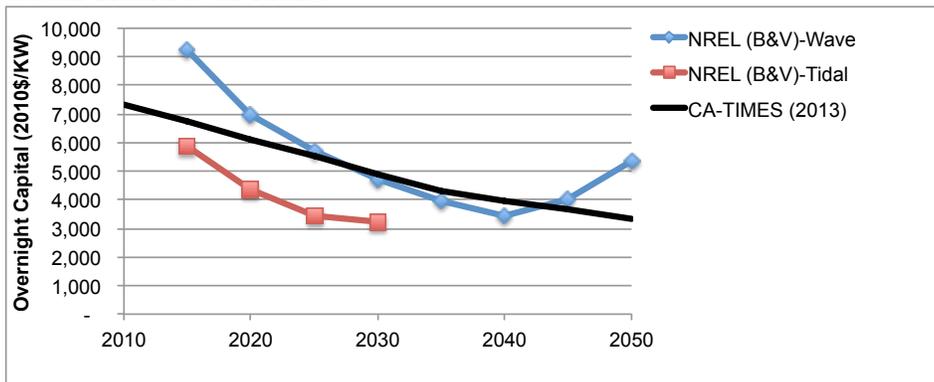


Figure A13. Cost comparison for Ocean Tidal Power Plants for CA-TIMES and other studies

Geothermal Power Plants

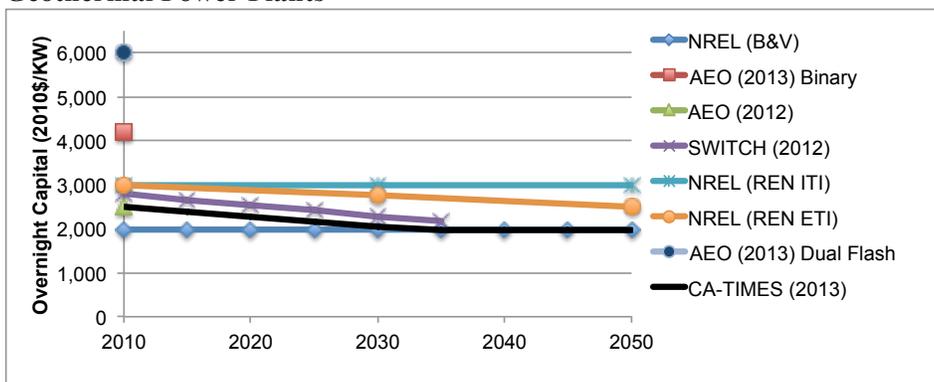


Figure A14. Cost comparison for Geothermal Power Plants for CA-TIMES and other studies

Wind Power Plants

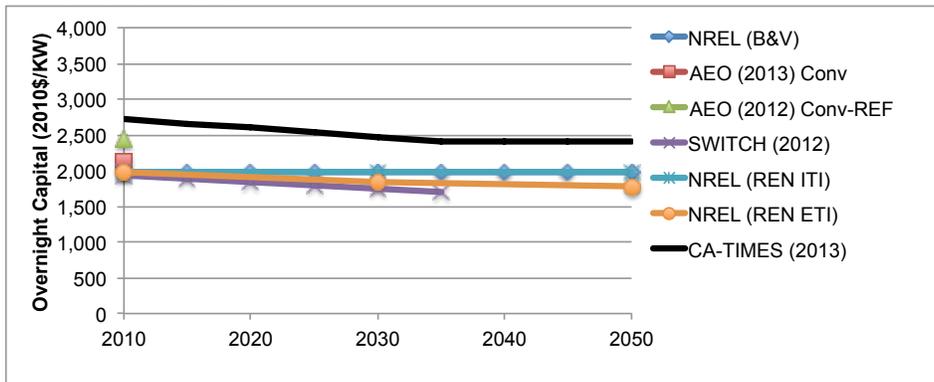


Figure A15. Cost comparison for Onshore Wind Turbines for CA-TIMES and other studies

Solar Power Plants

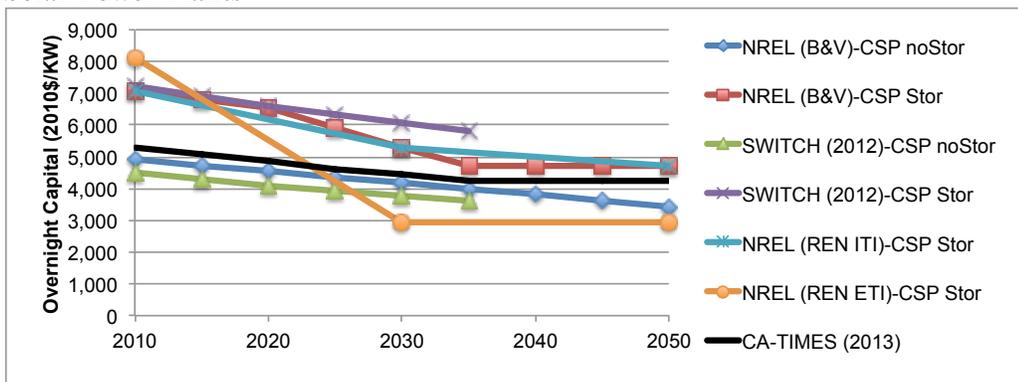


Figure A16. Cost comparison for Concentrating Solar Thermal Power Plants for CA-TIMES and other studies

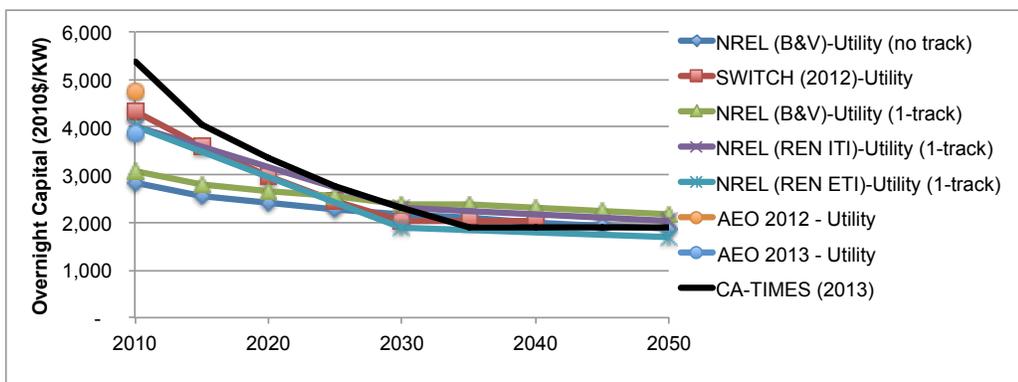


Figure A17. Cost comparison for Utility Scale Solar Photovoltaic Power Plants for CA-TIMES and other studies

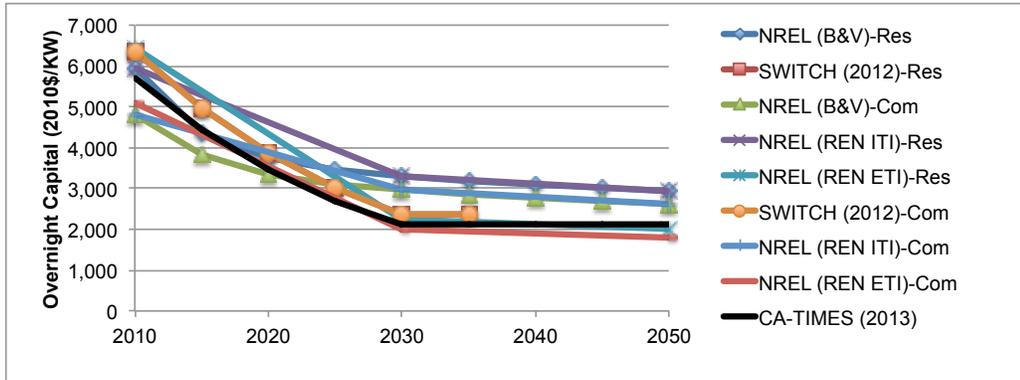


Figure A18. Cost comparison for Distributed (Residential and Commercial) Solar Photovoltaic Installations for CA-TIMES and other studies

Hurdle Rates and Growth Constraints

Electric power plants also have hurdle rates associated with them to represent the monetary and non-monetary effects of risk, uncertainty and other barriers to adoption of new technologies. The base hurdle rate for all mature technologies is 15%. Hurdle rates are assumed to decline for some advanced technologies in 2030. Hurdle rates are taken from EPA’s 9-region MARKAL model (U.S. EPA 2008). Electric power plant capacity additions are limited by the absolute amount of capacity that can be added in each five-year time period.

	Hurdle Rate (2010)	Hurdle Rate (2030)	Max Capacity Growth (GW/yr)
Natural Gas Combustion Turbine (NGCT)	15%	15%	None
Natural Gas Combined Cycle (NGCC)	15%	15%	None
Natural Gas Combined Cycle with CCS	30%	25%	None
Biomass Gasification Combined Cycle (IGCC)	25%	15%	0.3 to 0.5
Coal Steam	15%	15%	None
Coal Gasification Combined Cycle (IGCC)	25%	25%	None
Coal Gasification Combined Cycle (IGCC) w CCS	30%	25%	None
Nuclear Conventional Light Water Reactor	25%	25%	0.4 to 0.6*
Nuclear Pebble Bed Modular Reactor	44%	30%	0.4 to 0.6*
Nuclear Modular Helium Reactor	44%	30%	0.4 to 0.6*
Geothermal	15%	15%	0.3 to 0.5
Hydropower	15%	15%	None
Solar Photovoltaic (Residential)	15%	15%	1 to 1.2
Biogas	25%	15%	0.6
Molten Carbonate Fuel Cell	25%	20%	0.2 to 0.4
Tidal	45%	30%	0.2 to 0.4
Wind Turbine	15%	15%	3 to 4.4
Utility Solar Thermal	25%	15%	2.4 to 3*
Utility Solar Photovoltaic	25%	15%	2.4 to 3*
Electricity Transmission Line	15%	15%	None

*Limits on capacity additions of nuclear and utility solar apply to all types collectively not individually

APPENDIX B. ASSUMPTIONS OF TRANSPORTATION TECHNOLOGY COSTS, EFFICIENCIES, HURDLE RATES, ELASTICITIES, AND GROWTH/CAPACITY CONSTRAINTS

The costs and efficiencies of vehicle technologies are mainly taken from the Annual Energy Outlook (AEO 2012; AEO 2013). The major criteria for the data source being: (a) they should have both light-duty car and light-duty truck data for consistency, as the model analysis involves both, (b) the data source should have a base year gasoline price, so that the incremental cost comparison is done between different studies, as an example shown in this Appendix for electric vehicle with 100 mile range. The cost values are compared between different scenarios, and only if, the vehicle cost is significantly away from the range of the incremental cost values, it is adjusted. Annual Energy Outlook does not have all the vehicle technologies present in the CA-TIMES model. So, the following table presents the cost and efficiency assumptions for those. The fuel cell vehicle technology cost specified in the AEO lies outside of the cost comparison study range, so it is adjusted, as an exception.

Technology	Cost Assumptions	Efficiency Assumptions
Moderate midsize fuel efficient vehicle technology	The cost of the vehicle is assumed to be approximately 20% higher than their standard midsize vehicle technology.	Typically assumed to be about 15% higher than their standard midsize vehicle technology.
Advanced midsize fuel efficient vehicle technology	The cost of the vehicle is assumed to be approximately 20% higher than their standard midsize vehicle technology.	Typically assumed to be about 30% higher than their standard midsize vehicle technology.
Plug-in vehicles	Obtained from Annual Energy Outlook data.	The fuel efficiencies are specified separately for the charge-sustaining and charge-depleting modes. For the charge-sustaining modes, the efficiency is assumed to be equal to the comparable hybrid vehicles (gasoline/diesel/ethanol). The charge-depleting (CD) efficiency of the plug-in vehicle is calculated based on the ‘utility factors’ assigned for different mile ranges. Utility factor is the fraction of total annual VMT that is performed by electricity (CD mode). The utility factor is assumed to be 0.20 for 10-mile range vehicles, 0.40 for 20-mile range vehicles, 0.59 for 40-mile range vehicles, and 0.72 for 60-mile range vehicles.
Fuel Cell Vehicle	From the incremental cost comparison, the AEO cost data for fuel cell vehicles seem to be significantly higher than most studies. So, it is adjusted to be in line with the rest of the cost studies. The detailed cost data is summarized in the CA-TIMES cost assumptions table.	
Motorcycles	The fuel economies and costs vary widely by motorcycle type and model. The averages were obtained from the CEC IEPR and Caltrans MVSTAFF data.	
Bus	The costs and efficiencies of the bus technologies, such as diesel, hybrid and natural gas buses are obtained from various sources (U.S. EPA 2003; EESI 2007; INFORM 2007; UCS 2007).	
Passenger rail	The costs are obtained from the EPA US9r model database for the year 2005 and they are then converted to 2010 dollars (U.S. EPA 2006).	The efficiencies of the passenger rail are obtained from the National Transit Database (NTD 2005; NTD 2010). It is assumed to be the same for the year 2010. For the future years, they are scaled by the externally calculated growth rates.

Cost assumptions for midsize cars in CA-TIMES v1.5:

2010\$/vehicle	2010	2015	2020	2025	2030	2035	2040	2045	2050
Gasoline Car	23,661	23,732	24,423	25,789	25,897	25,910	25,910	25,910	25,910
Diesel Car	27,274	25,711	25,966	26,627	26,686	26,701	26,701	26,701	26,701
Gasoline Hybrid Car	27,823	26,912	27,214	28,069	28,014	27,950	27,950	27,950	27,950
Ethanol Flex Fuel Car	23,759	23,829	24,523	25,898	26,005	26,018	26,018	26,018	26,018

California TIMES (CA-TIMES) Modeling of California Energy and Climate Policies (Draft Final Report for Review and Comments)

Gasoline Plugin 10-mile range	28,480	28,480	28,415	29,041	28,892	28,828	28,828	28,828	28,828
Gasoline Plugin 30-mile range	33,512	33,512	32,274	32,162	31,712	31,647	31,647	31,647	31,647
Gasoline Plugin 40-mile range	36,029	36,029	34,203	33,722	33,121	33,057	33,057	33,057	33,057
Diesel Hybrid Car		30,830	30,830	29,306	29,208	29,145	29,145	29,145	29,145
Diesel Plugin 10-mile range	32,031	32,031	32,031	30,278	30,086	30,023	30,023	30,023	30,023
Diesel Plugin 40-mile range	37,819	37,819	37,819	34,959	34,315	34,252	34,252	34,252	34,252
Fuel Cell Car			62,641	40,453	35,532	31,616	31,616	31,616	31,616
Electric Vehicle (100 mile range)		35,617	35,617	33,223	31,954	31,095	31,095	31,095	31,095
Electric Vehicle (200 mile range)			54,798	54,798	50,114	46,934	46,934	46,934	46,934

Cost assumptions for midsize cars from the AEO (U.S. EIA 2013), Kromer and Heywood (Matthew Kromer 2007), and Argonne study (Argonne 2009), \$2010/Vehicle:

Vehicle Technologies	AEO 2013			Kromer and Heywood		Argonne's Multi-path Study		
	2015	2030	2040	BAU (2030)	Optimistic (2030)	2015	2030	2045
Gasoline Car	23,732	25,897	25,923	23,112	23,112	26,036	27,040	26,993
Diesel Car	25,711	26,686	26,714	24,931		29,148	29,663	29,498
Gasoline Hybrid Car	26,912	28,014	27,913	25,145	24,931	28,458	28,889	28,555
Ethanol Flex Fuel Car	23,829	26,005	26,031					
Gasoline Plugin 10-mile range		28,892	28,695	26,322	26,001	29,971	29,998	29,361
Gasoline Plugin 30-mile range				27,713	27,071			
Gasoline Plugin 40-mile range	36,741	33,121	32,259			36,497	34,347	32,665
Diesel Hybrid Car		29,208	29,109			31,340	31,255	31,005
Diesel Plugin 10-mile range						32,544	31,991	31,474
Diesel Plugin 40-mile range						39,177	36,504	34,921
Fuel Cell Car		50,532	43,533	28,569	26,964	36,269	33,471	32,366
Fuel Cell Plugin 10-mile range						35,713	33,107	31,614
Fuel Cell Plugin 40-mile range						44,554	38,612	35,582
Electric Vehicle (100 mile range)		31,954	30,662	34,026	30,495	55,552	44,746	39,020

Cost assumptions for midsize cars from the NAS study (2013):

	NAS (Expected)						NAS (Optimistic)					
	2015	2020	2025	2030	2040	2050	2015	2020	2025	2030	2040	2050
Gasoline Car	28,976	29,504	30,395	31,440	32,143	3,078	28,880	29,344	30,155	31,120	31,813	32,737
Gasoline Hybrid Car	32,734	32,182	32,220	32,572	33,051	33,998	32,329	31,508	31,649	31,883	32,554	33,482
Gasoline Plugin 40-mile range	37,491	36,356	35,749	35,536	35,162	35,513	36,883	35,342	34,655	33,997	34,047	34,718
Fuel Cell Car	37,059	35,347	34,271	33,196	32,662	32,573	35,989	33,565	32,301	31,038	30,635	30,807
Electric Vehicle (100 mile range)	43,249	39,045	37,107	35,408	33,396	32,444	41,971	36,914	34,686	32,092	30,865	30,927


Incremental cost assumptions for midsize cars from the AEO (U.S. EIA 2013), Kromer and Heywood (Matthew Kromer 2007), and Argonne study (Argonne 2009), \$2010/Vehicle:

Vehicle Technologies	AEO 2013			Argonne's Multi-path Study			Kromer & Heywood	
	2015	2030	2040	2015	2030	2045	BAU 2030	Optimistic 2030
Gasoline Car	-	-	-	-	-	-	-	-
Diesel Car	\$1,979	\$790	\$791	\$3,112	\$2,624	\$2,505	\$1,819	-
Gasoline Hybrid Car	\$3,181	\$2,117	\$1,990	\$2,422	\$1,849	\$1,562	\$2,033	\$1,819

California TIMES (CA-TIMES) Modeling of California Energy and Climate Policies (Draft Final Report for Review and Comments)

Ethanol Flex Fuel Car	\$98	\$109	\$108	-	-	-	-	-
Gasoline Plugin 10-mile range	-	\$2,996	\$2,772	\$3,935	\$2,958	\$2,368	\$3,210	\$2,889
Gasoline Plugin 20-mile range	-	-	-	-	-	-	-	-
Gasoline Plugin 30-mile range	-	-	-	-	-	-	\$4,601	\$3,959
Gasoline Plugin 40-mile range	\$13,009	\$7,225	\$6,336	\$10,461	\$7,308	\$5,672	-	-
Diesel Hybrid Car	-	\$3,311	\$3,186	\$5,304	\$4,215	\$4,012	-	-
Diesel Plugin 10-mile range	-	-	-	\$6,508	\$4,952	\$4,481	-	-
Diesel Plugin 40-mile range	-	-	-	\$13,142	\$9,464	\$7,928	-	-
Fuel Cell Car	-	\$24,636	\$17,610	\$10,234	\$6,431	\$5,373	\$5,457	\$3,852
Fuel Cell Plugin 10-mile range	-	-	-	\$9,677	\$6,067	\$4,622	-	-
Fuel Cell Plugin 40-mile range	-	-	-	\$18,518	\$11,572	\$8,589	-	-
Electric Vehicle (100 mile range)	-	\$6,057	\$4,739	\$29,516	\$17,706	\$12,027	\$10,914	\$7,383
Electric Vehicle (200 mile range)	-	-	-	-	-	-	-	-

Incremental cost comparisons of electric vehicles (100-mile range), \$2010/vehicle:

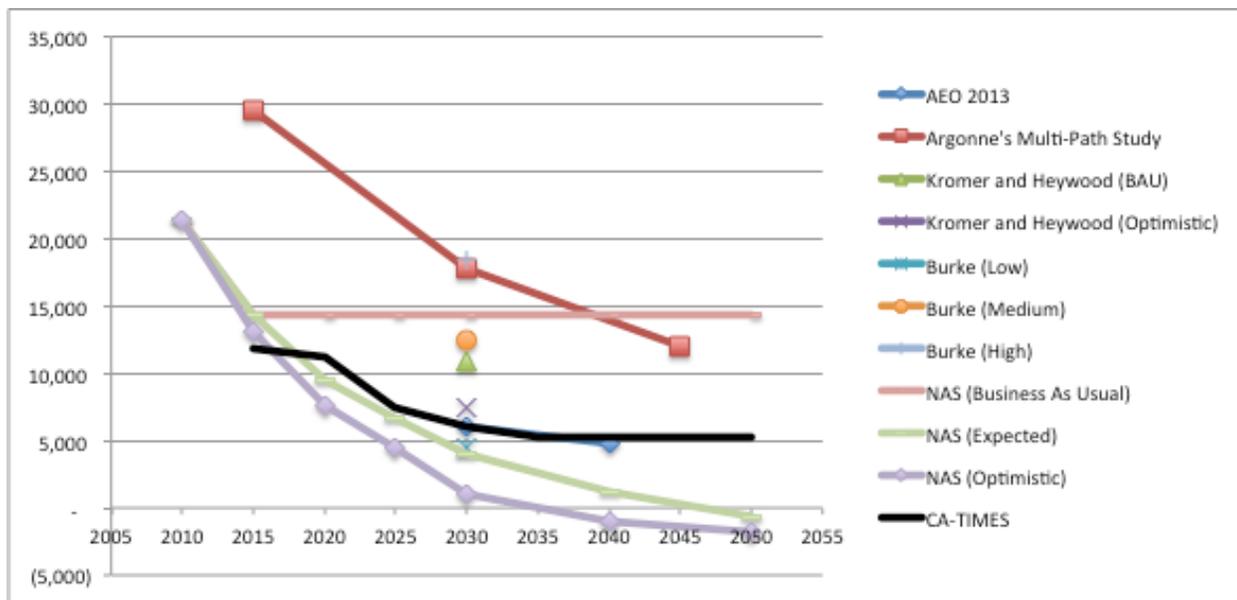

Efficiency assumptions for midsize cars from the AEO (U.S. EIA 2013), MIT study (2007), and Argonne study (Argonne 2009), MVMT/PJ:

Vehicle Technology	AEO 2013			Argonne's Multipath Study			Kromer & Heywood
	2015	2030	2040	2015	2030	2045	2030
Gasoline Car	276.6	403.1	401.8	199.1	205.2	228.7	369.8
Diesel Car	343.9	427.4	426.2	253.6	264.0	302.3	431.5
Ethanol Flex Fuel Car	274.6	407.9	407.1				
Gasoline Hybrid Car	393.8	561.0		339.5	388.3	438.7	661.0
Gasoline Plugin 10-mile Range	441.5	629.1	627.4	896.9	1035.9	1107.7	786.5
Gasoline Plugin 30-mile Range							927.3
Gasoline Plugin 40-mile Range	531.0	747.7	745.3	914.2	1040.5	1144.1	

California TIMES (CA-TIMES) Modeling of California Energy and Climate Policies (Draft Final Report for Review and Comments)

Gasoline Plugin 60-mile Range										1018.5
Natural Gas Car	286.7	433.5	433.4							
Natural Gas Bi-Fuel Car	264.8	401.0	401.1							
Diesel Hybrid Car				361.5	404.9	465.2				
Diesel Plugin 10-mile Range				934.1	1024.3	1141.4				
Diesel Plugin 40-mile Range				913.9	1060.4	1135.5				
Fuel Cell Car	363.2	420.9	420.7	407.6	460.6	545.9				839.6
Fuel Cell Plugin 10-mile Range				800.6	930.1	1049.3				
Fuel Cell Plugin 40-mile Range				797.7	932.2	1050.9				
Battery Electric Vehicle (100 mile)	1293.0	1418.1	1441.7	739.9	862.9	990.2				1150.6
Battery Electric Vehicle (200 mile)	662.3	1093.5	1127.7							

Efficiency assumptions for midsize cars from UCD Study for different drive cycles (Burke et al, 2011), MVMT/PJ:

Vehicle Technology	UCD Study (Burke)								
	2015			2030			2045		
	FUDS	FHWDS	US06	FUDS	FHWDS	US06	FUDS	FHWDS	US06
Gasoline Car	318.5	479.2	288.5	364.6	563.8	338.5	376.2	593.1	354.6
Gasoline Hybrid Car	563.8	570.0	357.7	659.2	646.2	413.1	676.2	686.2	429.2
Fuel Cell Car	635.4	698.5	471.5	790.8	857.7	586.2	837.7	919.2	633.1

*FUDS: Federal Urban Driving Schedule

**FHWDS: Federal Highway Driving Schedule

+US06: US06 Driving Schedule

Technology-specific hurdle rates: transportation sector

Vehicle Technology	Hurdle Rate	Vehicle Technology	Hurdle Rate	Vehicle Technology	Hurdle Rate
Gasoline Car	18%	Gasoline Hybrid	25%	Diesel Plug-in 30 mile	47%
Diesel Car	30%	Hydrogen Fuel Cell	45%	E85 Plug-in 30 mile	35%
Gasoline Plug-in 10 mile	35%	Adv. Gasoline Car	25%	Gasoline Plug-in 40 mile	35%
E85 Flex Fuel Car	18%	Adv. Flex Fuel Car	25%	Diesel Plug-in 40 mile	47%
Natural Gas Car	45%	E85 Hybrid Car	25%	E85 Plug-in 40 mile	35%
Natural Gas Bi-Fuel Car	45%	E85 Plug-in 10 mile	35%	Gasoline Plug-in 60 mile	35%
LPG Bi-Fuel Car	45%	Diesel Plug-in 10 mile	47%	Diesel Plug-in 60 mile	47%
Battery Electric Car	45%	Gasoline Plug-in 30 mile	35%	E85 Plug-in 60 mile	35%
Diesel Hybrid	37%				

Energy service demand elasticity for the transport sector

Energy service demand	Low (inelastic)	High (elastic)	Representative	Source
Light-duty Passenger Travel	-0.034	-0.213	-0.1	Low from Hughes et al. (Jonathan Hughes 2008), High from Barker et al. (Terry Barker 2009), Rep. is a mid value that is a little higher than Hughes et al.'s high value.
Motorcycles and Motorscooters Travel	-0.034	-0.213	-0.1	Low from Hughes et al. (Jonathan Hughes 2008), High from Barker et al. (Terry Barker 2009), Rep. is a mid value that is a little higher than Hughes et al.'s high value. Assume motorcycles are similar to light-duty vehicles.
Light-duty Truck Travel	-0.034	-0.213	-0.1	Low from Hughes et al. (Jonathan Hughes 2008), High from Barker et al. (Terry Barker 2009), Rep. is a mid value that is a little higher than Hughes et al.'s high value.
Heavy-duty Truck Travel	--	--	-0.213	Only one value found in Barker et al. Road transport category

California TIMES (CA-TIMES) Modeling of California Energy and Climate Policies (Draft Final Report for Review and Comments)

Medium-duty Travel	--	--	-0.213	is used.
Transit Bus Travel	--	--	-0.213	
School Bus Travel	--	--	-0.213	
Intercity and Other Buses Travel	--	--	-0.213	
Commuter Rail Travel	--	--	-0.311	Only one value found in Barker et al. Rail transport category is used.
Heavy Rail Travel	--	--	-0.311	
Light Rail Travel	--	--	-0.311	
Intercity Rail Travel	--	--	-0.311	
Freight Rail Travel	--	--	-0.311	

Market growth rate constraint

The equation for the capacity investment in the model, for a given time-period ‘t’, and growth rate ‘r’ is,

$$CAP(t) = CAP(t-1) * r + CAP_{START}$$

For any new investment, CAP(t-1) is zero. If the starting capacity, CAP_{START}, were not specified, then there would be no increase in the capacity of the commodity.

All growth rates are annual and they are 1.50 from the year 2010 till 2030, and 1.10 for the year 2030 and beyond.

Capacity constraints


Starting value for capacity build-up for light-duty cars (LDC) and light-duty trucks (LDT)(thousands of vehicles)

Vehicle Technology	LDC	LDT	Source
Diesel	100	175	There were roughly 275,000 diesel ICE vehicles in CA in 2005. LD Cars made up less than half of this quantity, while LD Trucks made up a bit more than half.
Diesel Hybrid	20	20	
Plug-in vehicle	20	20	Initial roll-out of the Volt (a LD Car) will start in 2012 and will be about 45,000 units spread over several states, including CA. (Source: http://en.wikipedia.org/wiki/Chevrolet_Volt) California will likely get a large share of these vehicles. By the 2016 time period, there should be quite a bit more PHEVs in CA. Thus, I give a non-trivial start-up value here. There have not yet been any announcements as to the initial roll-out of any PHEV LD Trucks. But presumably, they could also be introduced in the same quantity as LD Cars.
Battery electric	20	20	Assumed same as the PHEVs.
Fuel Cell	10	10	
Flex Fuel (E85)	300	300	There were 107,789 ethanol FFVs in CA in 2005. In 2010, there are roughly 299,146. (source: Wayne's 80in50 PATH stock turnover model)
Flex Fuel Hybrid (E85)	200	200	
Gasoline Hybrid	200	200	There were 103,193 gasoline HEVs in CA in 2005. In 2010, there are roughly 348,495. New LD Car and Truck sales in California are about 1 million each annually. If automakers had to, they could ramp up production pretty quickly and supply a substantial fraction of these 1 million vehicles (in each class) with gasoline HEVs.
Moderate Gasoline Car	750	750	
Advanced Gasoline Car	750	750	There were 11,289,000 gasoline ICE light trucks in CA in 2005. Assume that moderate and advanced gasoline vehicles start at a capacity level that is a reasonable fraction of this number. New LD Car and Truck sales in California are about 1 million each annually. If automakers had to, they could ramp up production pretty quickly and supply a substantial fraction of these 1 million vehicles (in each class) with gasoline HEVs.
Advanced E85	200	200	There were 156,585 ethanol FFVs in CA in 2005. In 2010, there are roughly 303,203. (source: Wayne's 80in50 PATH stock turnover model) Assume that moderate and advanced E85 vehicles start at a capacity level that is a reasonable fraction of this number.
Natural Gas Car	1	0.5	There were roughly 1,358 natural gas vehicles in CA in 2005.

APPENDIX C. ASSUMPTIONS OF RESIDENTIAL AND COMMERCIAL TECHNOLOGY COSTS, HURDLE RATES, ELASTICITIES, AND GROWTH/CAPACITY CONSTRAINTS

Levelized cost

1. Residential space heating

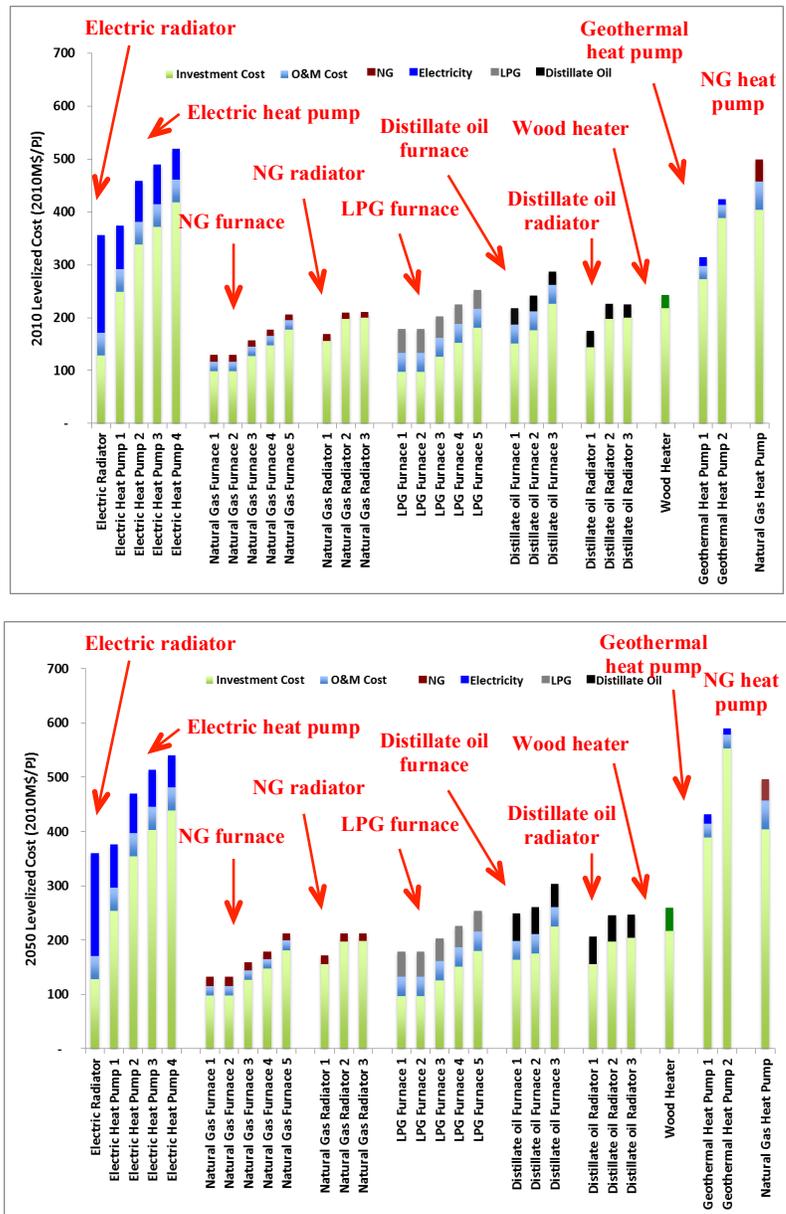


Levelized cost of residential space heating in 2010 (top) and 2050 (bottom) using fuel costs of 2010. NGA: natural gas; LPG: liquid petroleum gas.

Figures above show the levelized cost of space heating technology in 2010 and 2050. Note that technology cost and efficiency improvement of each equipment over time is determined exogenously, though most of the changes over time are small compared to the variations between technologies. The overall efficiency of an end-use across technologies is determined endogenously by the model based on the investment decisions on the mix of technologies and fuel types to meet the overall demand each year.

Within the same type of technology (e.g. electric heat pump a-d), the capital costs of more efficient technologies are higher. The technology-specific hurdle rate for space heating technology range from 15-25% (U.S. EIA 2011).

Note that fuel costs shown below are the *annual average* fuel costs for 2010 from (EIA 2013). The actual fuel costs of fuel use are projected endogenously by the model, which can vary significantly based on the time of use (e.g. peak vs. off-peak or summer vs. winter) and scenarios.


2. Residential space cooling

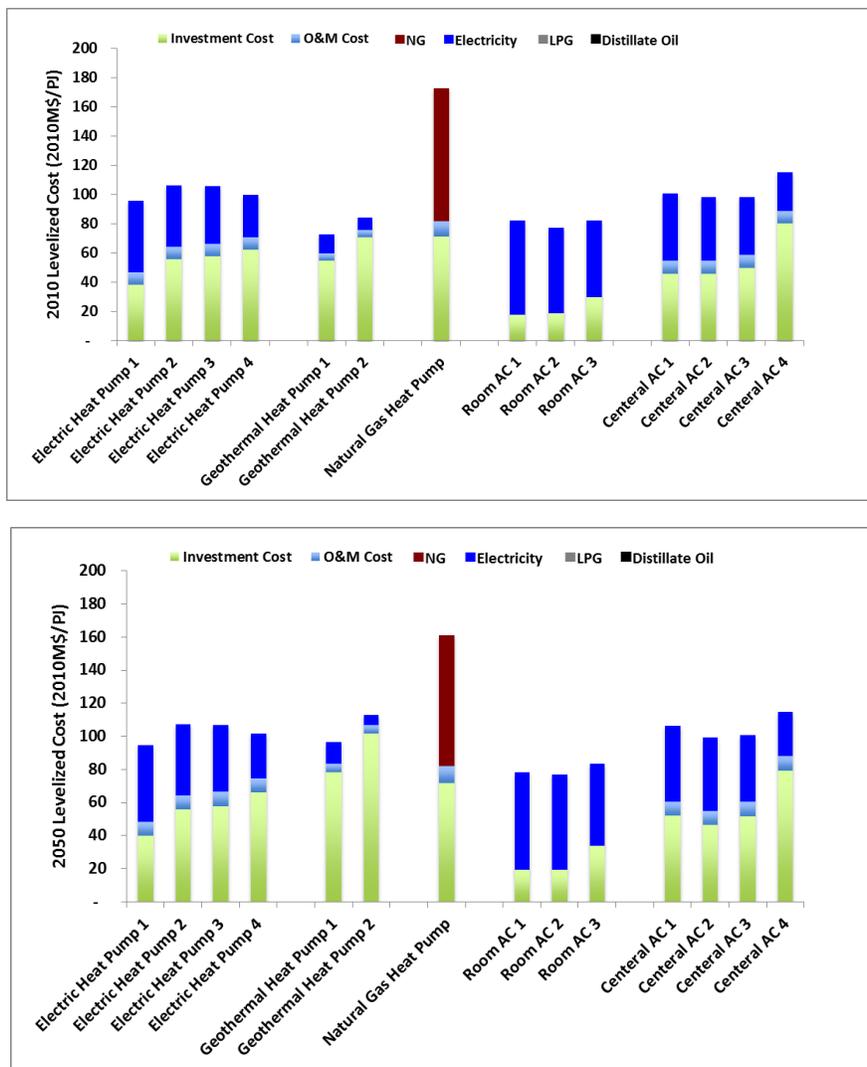

Levelized cost of residential space cooling in 2010 (top) and 2050 (bottom) using fuel costs of 2010.

Figures above show the levelized cost of space cooling for 2010 and 2050. Higher capital costs also translate into higher levelized cost within the same type of technology (e.g. electric heat pump a-d) due to the fact that fuel use cost is a much smaller portion of total levelized costs. Room ACs have the lowest investment cost but higher annual fuel cost, but overall they still have the lowest levelized cost among all cooling technologies.


3. Residential lighting

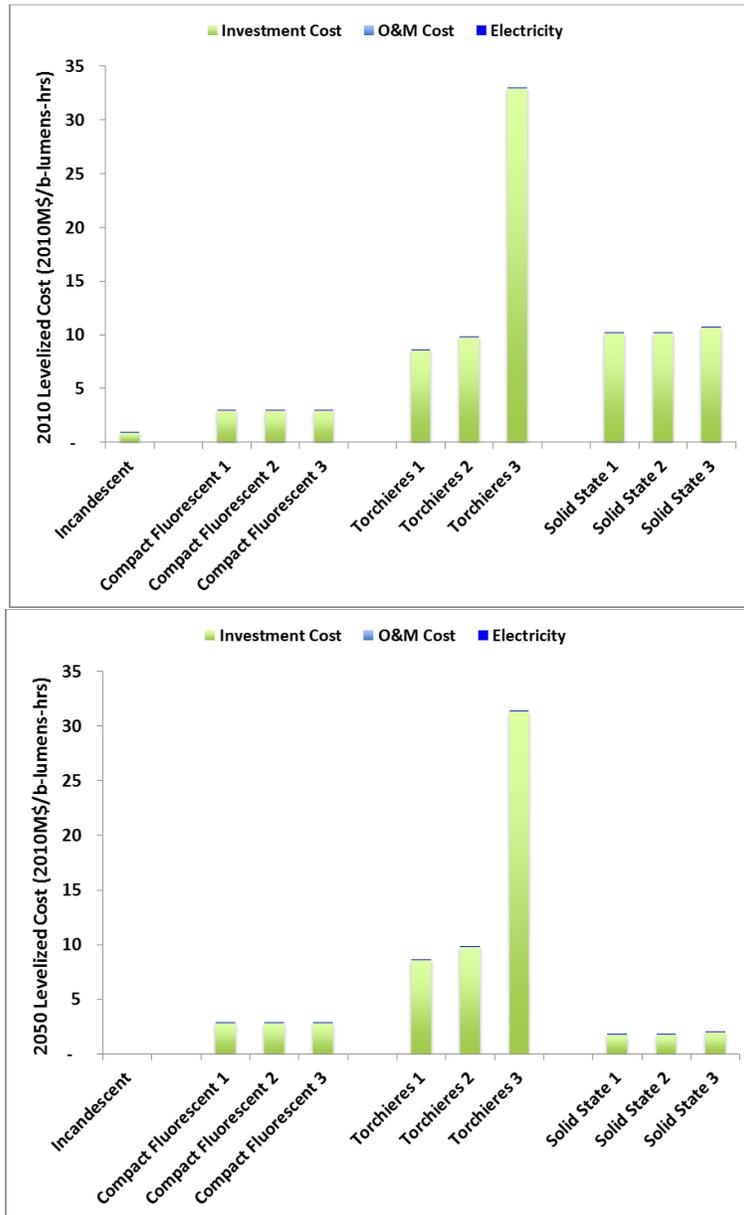


Levelized cost of residential lighting in 2010 (top) and 2050 (bottom) using fuel costs of 2010.

Compact fluorescent lighting (CLF) already has very favorable levelized cost today. Other more advanced lighting technologies are very expensive today, but become cost-effective in the future. In the following the levelized costs of other residential and commercial technologies can be seen.


4. Other residential end uses

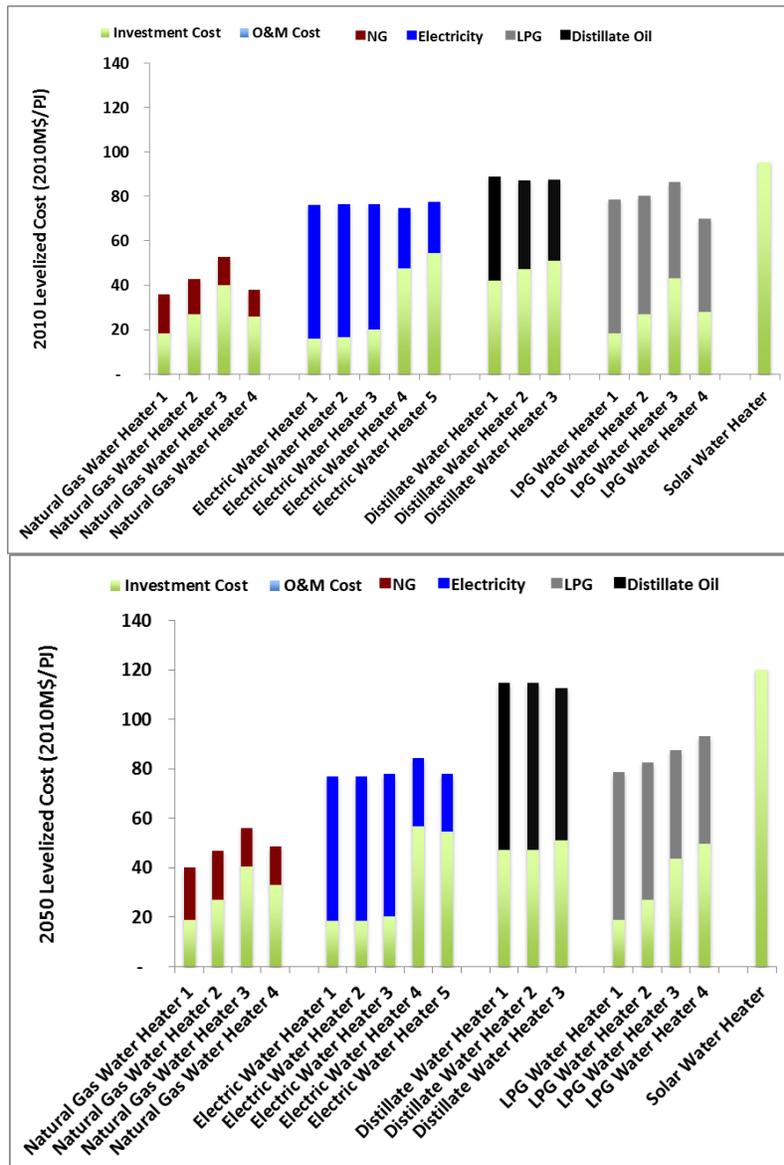


Levelized cost of residential water heating in 2010 (top) and 2050 (bottom) using fuel costs of 2010.

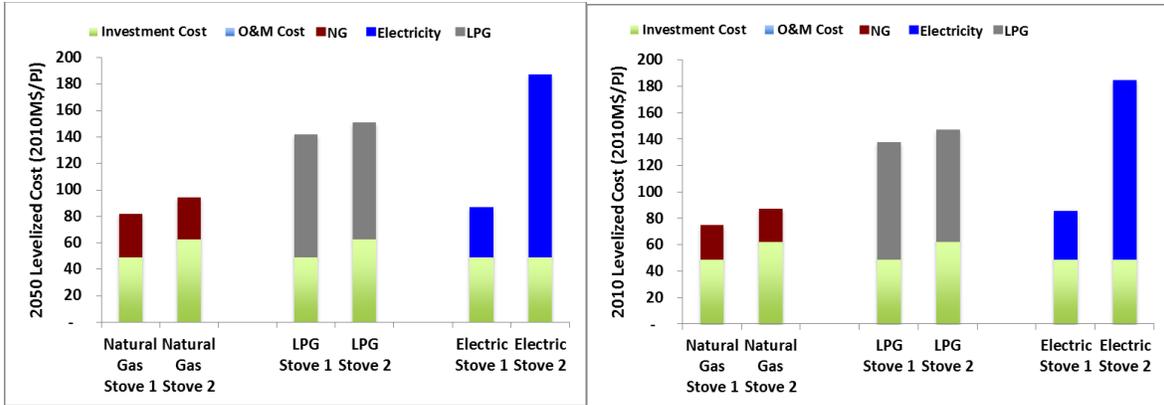


Levelized cost of residential cooking in 2010 (top) and 2050 (bottom) using fuel costs of 2010.

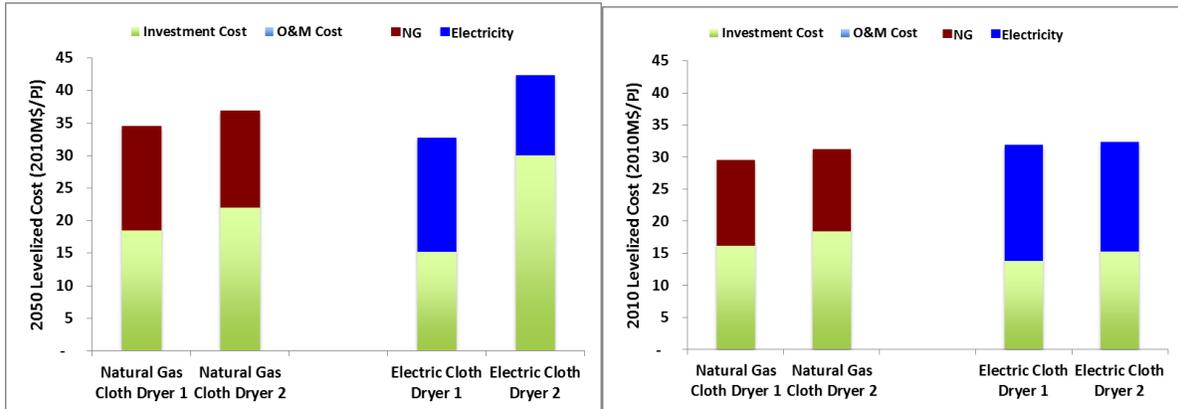


Levelized cost of residential clothes drying in 2010 (top) and 2050 (bottom) using fuel costs of 2010.

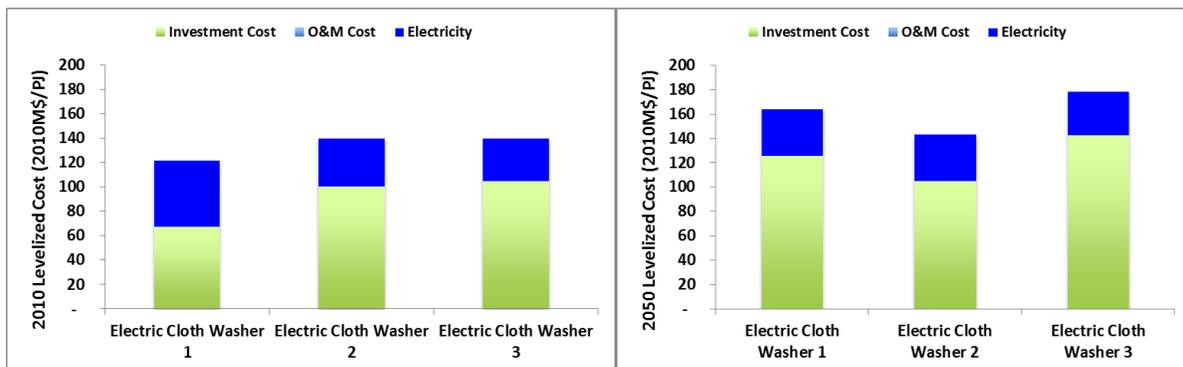


Levelized cost of residential clothes washing in 2010 (top) and 2050 (bottom) using fuel costs of 2010.

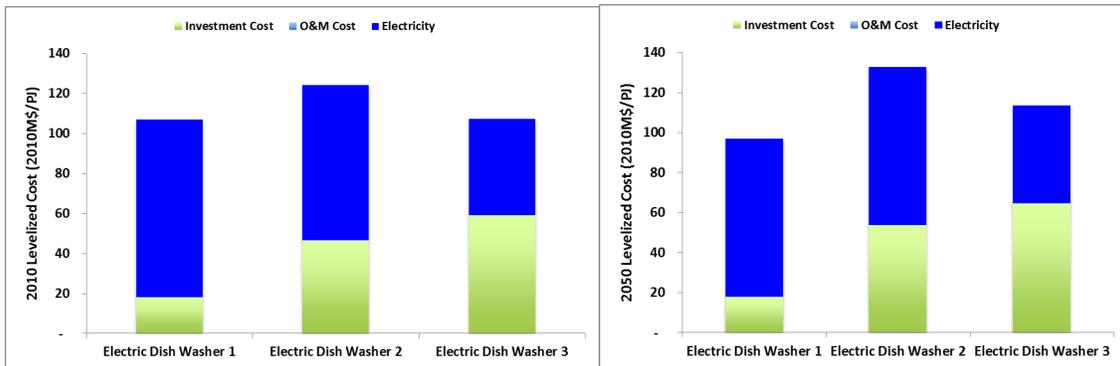

Levelized cost of residential dish washing in 2010 (top) and 2050 (bottom) using fuel costs of 2010.

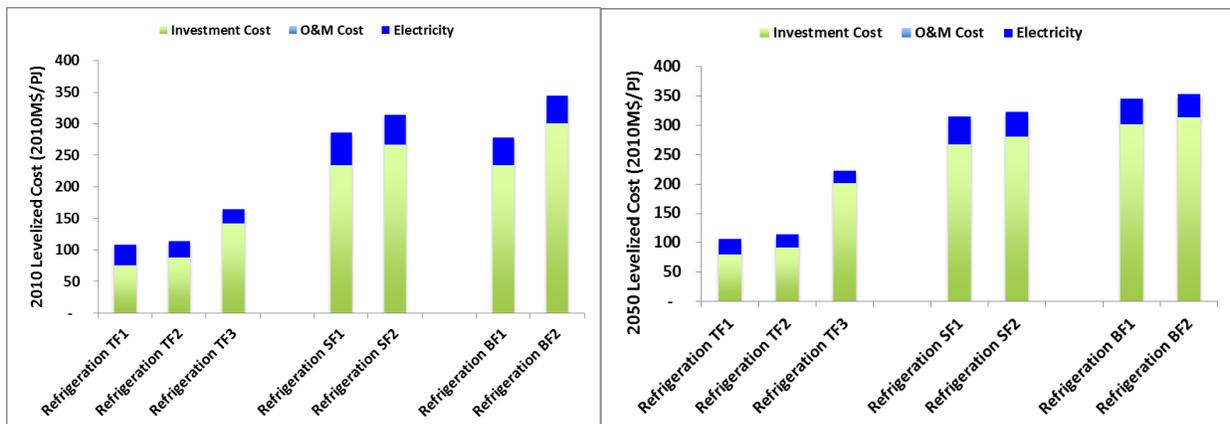


Levelized cost of residential refrigeration in 2010 (top) and 2050 (bottom) using fuel costs of 2010.

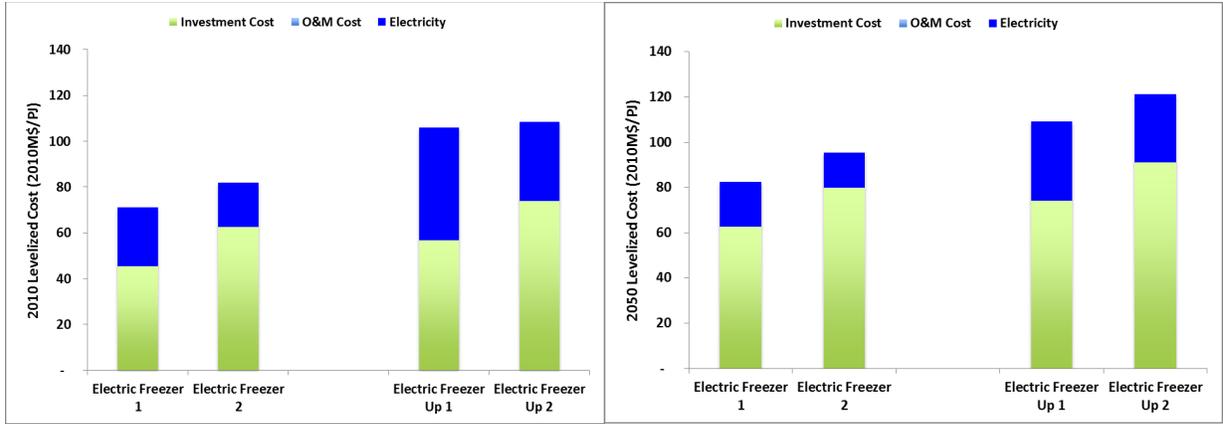


Levelized cost of residential freezer in 2010 (top) and 2050 (bottom) using fuel costs of 2010.

5. Commercial heating

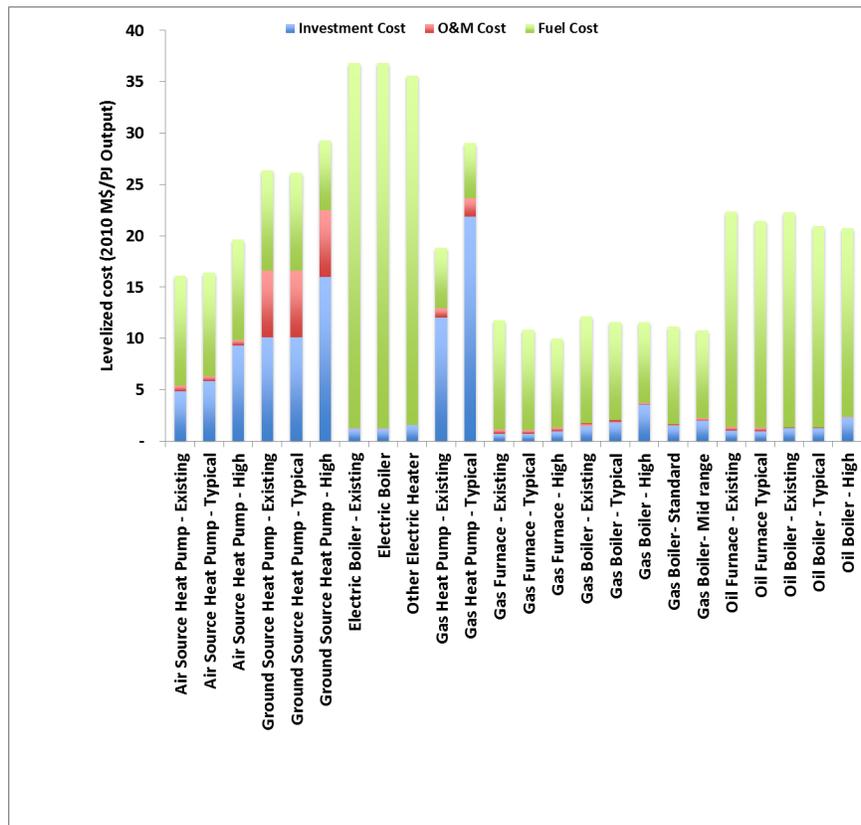


Levelized cost of commercial heating in 2010

6. Commercial cooling

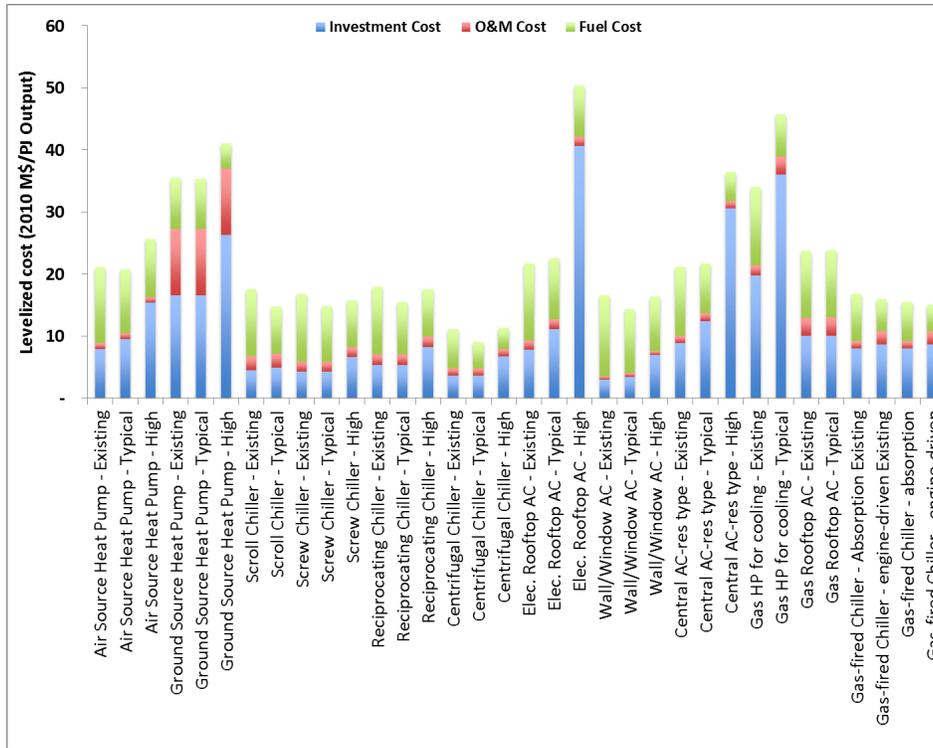


Levelized cost of commercial cooling in 2010

7. Commercial water heating

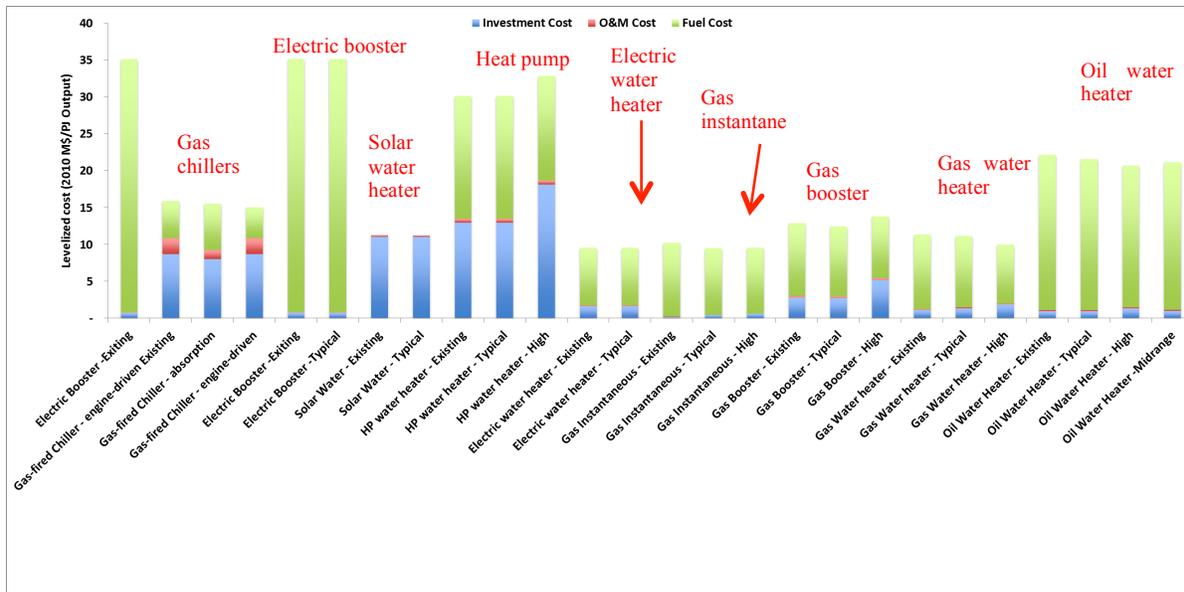


Levelized cost of commercial water heating in 2010

8. Commercial ventilation

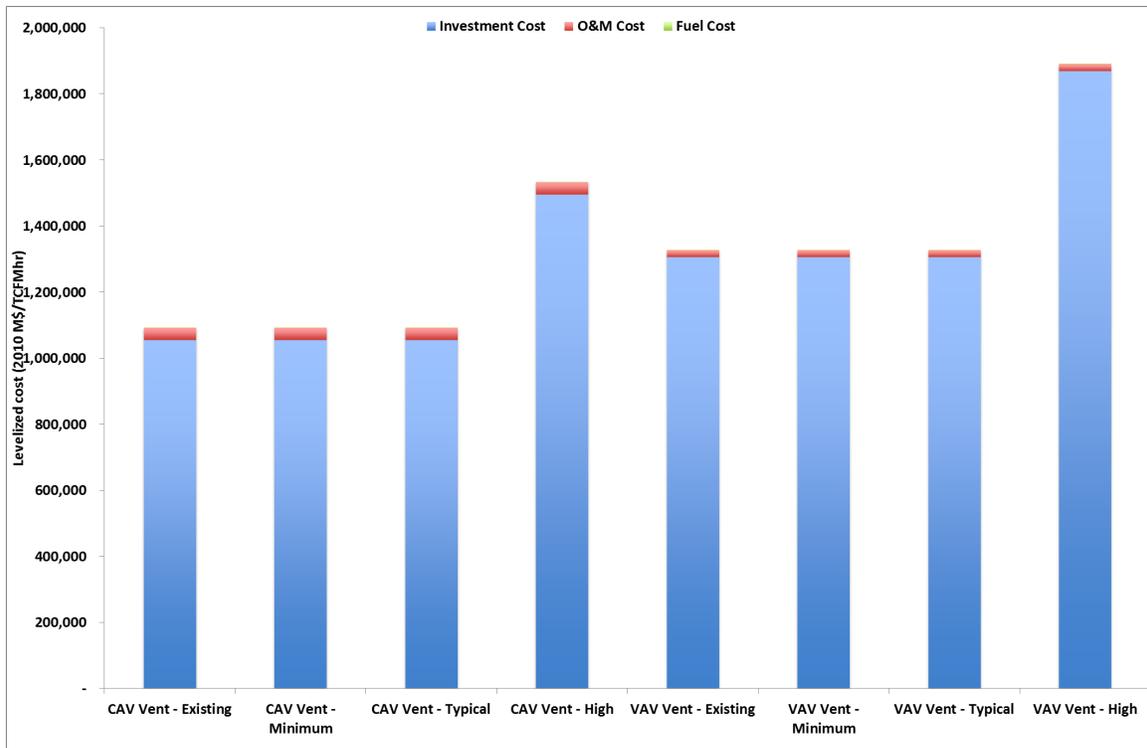


Levelized cost of commercial ventilation in 2010

9. Commercial cooking

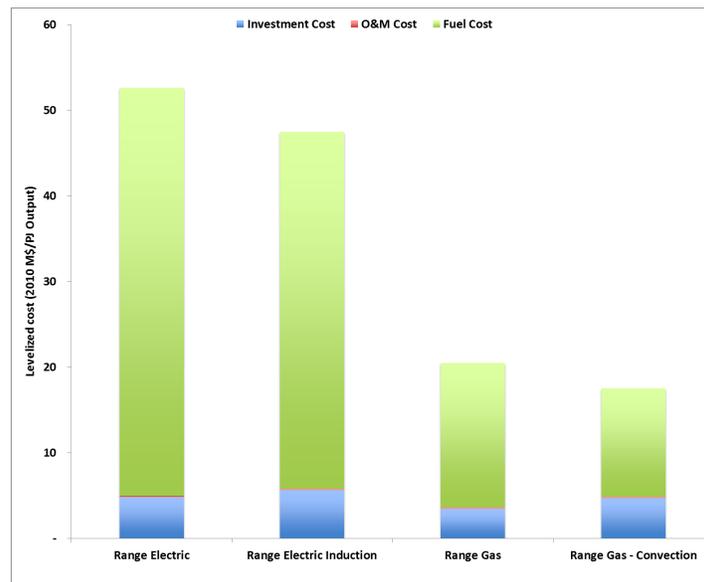


Levelized cost of commercial cooking in 2010

10. Commercial lighting

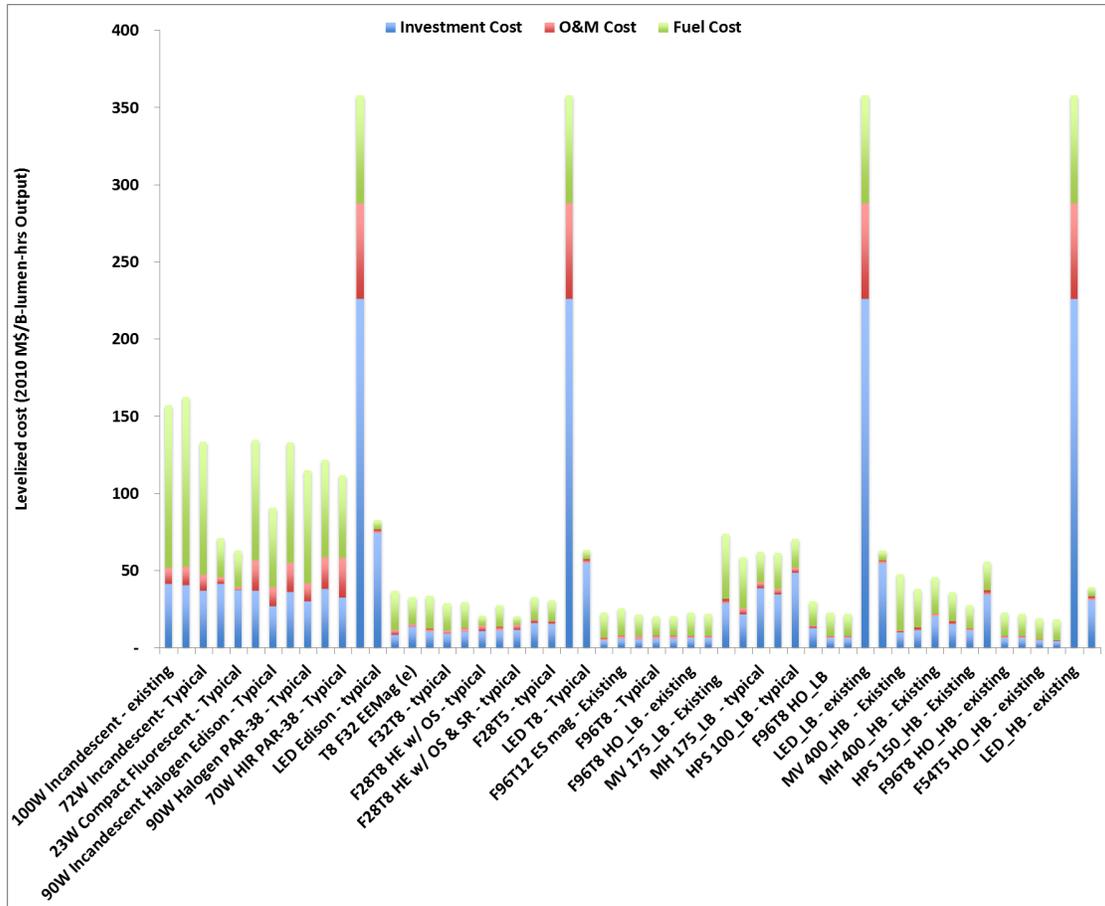

Levelized cost of commercial lighting in 2010

11. Commercial refrigeration

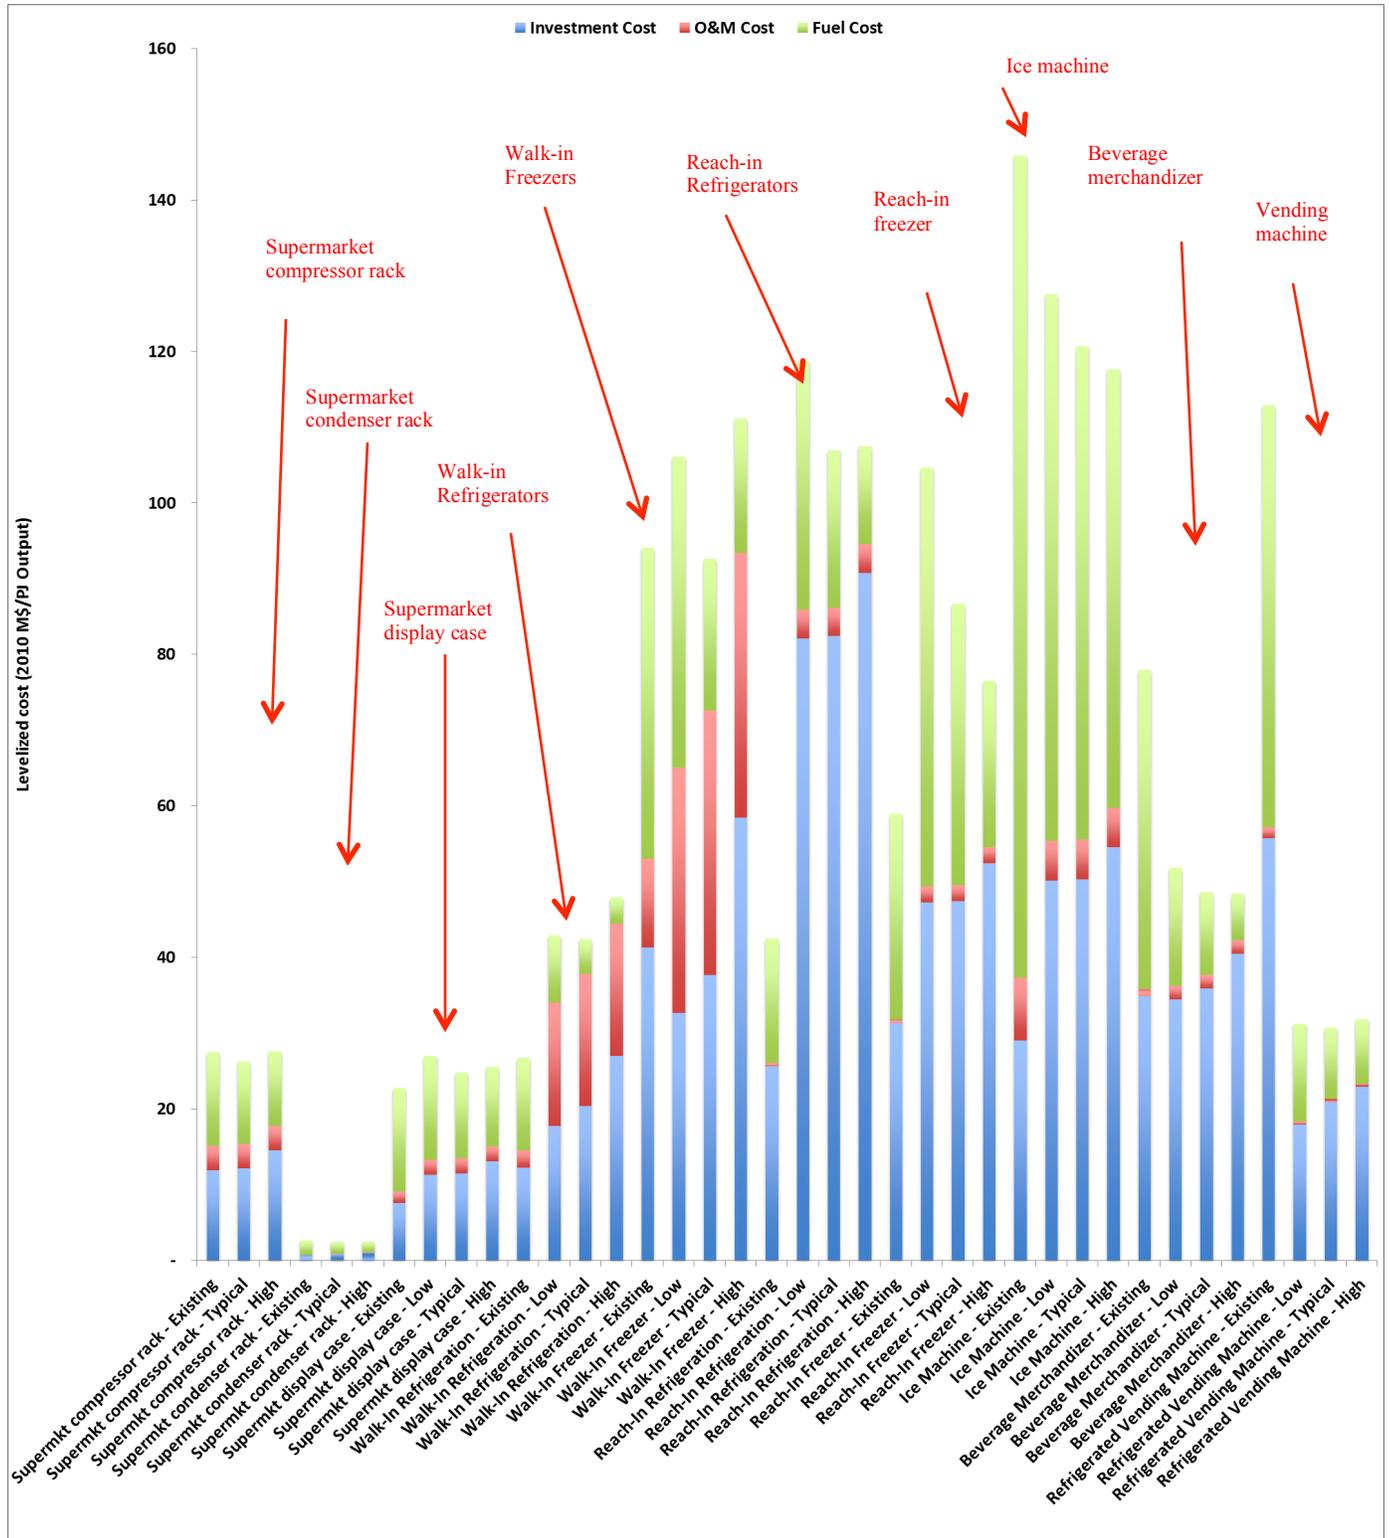

Levelized cost of commercial refrigeration in 2010

Hurdle rate

Residential

End-use	Technology	Hurdle rate
Space Heating	Electric radiator	15%
	Electric Heat Pump	25%
	Natural Gas Furnace	15%
	Natural Gas Radiator	15%
	LPG Furnace	15%
	Distillate Furnace	15%
	Distillate Radiator	15%
	Wood Heater	15%
	Geothermal Heat Pump	15%
	NG Heat Pump	15%
Space Cooling	Room AC	42%
	Central AC	25%
	Electric Heat Pump	25%
	NG Heat Pump	15%
Water Heating	NG Water heater	30%
	Electric Water heater	50%
	Distillate Water heater	15%
	LPG Water heater	30%
	Solar Water heater	30%
Cooking	NG Cooking	83%
	LPG Cooking	83%
	Electric Cooking	83%
Clothes Drying	NG Clothes Dryer	47%
	Electric Clothes Dryer	90%
Dish Washing	Dish Washer	15%
Freezing	Freezer	37%
Refrigeration	Refrigerators	10%
Cloth Washing	Cloth washer	30%

Commercial

End-use	Hurdle rate
Typical and mid range technologies	0.18
High efficiency technologies	0.24

Elasticity

Energy Service Demand	UP	LO
Commercial-Space Cooling	-0.15	-0.05
Commercial-Cooking	-0.05	0
Commercial-Space Heating	-0.1	0
Commercial-Hot Water Heating	-0.1	0
Commercial-Lighting	-0.15	0
Commercial-Electric Equipment	-0.05	0
Commercial-Refrigeration	0	0
Residential-Space Cooling	-0.15	-0.05
Residential-Clothes Dryers	-0.05	0
Residential-Clothes Washers	-0.05	0
Residential-Dish Washers	-0.05	-0.03
Residential-Electric Appliances	-0.2	-0.05
Residential-Space Heating	-0.05	0
Residential-Hot Water Heating	-0.05	0
Residential-Cooking	0	0
Residential-Lighting	-0.1	0
Residential-Refrigeration	-0.05	-0.03

Growth constraints

Residential end-use	Technology	Growth rate constraint
Space heating	Electric radiator, natural gas furnace, natural gas radiator, LPG furnace, wood heater	5%
Heat pump	Distillate furnace, distillate radiator	20%
	Electric heat pump, natural gas heat pump	5%
Space cooling	Geothermal heat pump	20%
	Room AC, Central AC	5%
Water heating	Natural gas water heater, electric water heater, LPG water heater	5%
	Distillate oil water heater	20%
Cooking	Natural gas stove, LPG stove, electric stove	5%
Clothes washing	Electric clothes washing	5%
Clothes drying	Natural gas clothes drying, electric cloth drying	5%
Dish washing	Electric dish washer	5%
Freezing	Electric freezer	5%
	Electric up freezer	20%
Refrigeration	TFA, SFA, BFA refrigerator	5%
Lighting	Incandescent, compact fluorescent, torchieres, solid state lighting	5%
Pool pump	Electric pool pump, solar pool pump	5%

Commercial end-use	Technology	Growth rate constraint
Space heating	Electric boiler, natural gas furnace, natural gas boiler, oil furnace, oil boiler	5%
Heat pump	Air source heat pump, natural gas heat pump, geothermal source heat pump	5%
Space cooling	Wall window AC, central AC, electric rooftop, natural gas rooftop, reciprocating chiller, centrifugal chiller, gas fired chiller (typical)	5%
	Scroll chiller, screw chiller, gas fired chiller (engine driven)	20%
Water heating	Electric water heater, natural gas water heater, solar water heater, heat pump water heater	5%
	Electric booster water heater, gas booster water heater, gas instantaneous water heater, oil water heater	20%
Cooking	Electric induction range, electric range, gas range	5%
Ventilation	Constant air volume ventilation (CAV), variable air volume ventilation (VAV)	5%
Lighting	Incandescent (100W), compact fluorescent (23W), metal halide, PAR38 halogen (90W), Fluorescent lamps, high pressure sodium lamps 150 (HPS 150), LED 100 HPS	5%
	Incandescent (72W), incandescent halogen, HIR PAR, LED Edison, LED HPS	20%
Refrigeration	Supermarket rack, walk-in refrigerator, reach-in refrigerator, ice machine, beverage merchandiser refrigerator, vending machine, walk-in freezer, reach-in freezer	5%

Share constraints

Residential

End-use	Technology	Share Constraint Type	Year	Share Constraint
Residential space cooling*	Room AC	Up	2010-2050	20%
	Central AC	Up	2010-2050	75%

California TIMES (CA-TIMES) Modeling of California Energy and Climate Policies (Draft Final Report for Review and Comments)

Residential lighting	Torchieres	Up	2010-2050	35%
Residential cooking**	Electric stove cooking	Lo	2010-2050	49%

* We assume the share of room AC and central AC remains the same in all years.

** Share of electric cooking will be at least the same as in 2010.

Commercial

End-use	Technology	Share Constraint Type	Year	Share constraint
Commercial space cooling*	Wall window AC	Up	2010-2050	12%
	Central AC	Up	2010-2050	85%
Commercial miscellaneous	Natural gas	Up	2010	65%
			2012-2050	50%
Commercial cooking**	Electric cooking	Up	2010-2050	24%
Commercial lighting***	Incandescent	Lo	2012	17%
			2015	10%
			2017	7%
			2020	4%

* We assume the share of room AC and central AC remains the same in all years.

** Share of electric cooking will be at least the same as in 2010.

*** Incandescent light bulbs will gradually phase out.

APPENDIX D. POLICY DESCRIPTIONS FOR CA-TIMES SCENARIOS

Policies	Descriptions
Biofuel Subsidies	<ul style="list-style-type: none"> - <u>Corn ethanol</u>: Federal Volumetric Ethanol Excise Tax Credit (i.e., “blender’s credit”) of \$0.45/gal. Assumed to expire in 2015. - <u>Sugar cane ethanol</u>: Same as corn ethanol. - <u>Cellulosic ethanol</u>: Federal tax credit of \$1.01/gal. Based on the Food, Conservation and Energy Act of 2008 (i.e., the “farm bill”). Assumed to expire in 2020. - <u>Biodiesel</u>: Federal tax credit of \$1.00/gal for biodiesel from soy and animal tallow, \$0.50/gal for biodiesel from yellow grease. Based on American Jobs Creation Act of 2004. Assumed to expire in 2015.
Biofuel Import Tariffs	<ul style="list-style-type: none"> - <u>Sugar cane and other types of imported ethanol</u>: Import duty of \$0.54/gal.
Transportation Fuel Taxes ¹⁸	<ul style="list-style-type: none"> - <u>Gasoline</u>: California state tax of \$0.49/gal (includes excise tax and state, county, and local sales taxes). Federal excise tax of \$0.184/gal. Assumed to always be the same. - <u>Diesel</u>: California state tax of \$0.49/gal (includes excise tax and state, county, and local sales taxes). Federal excise tax of \$0.244/gal. Assumed to always be the same. - <u>Ethanol and E-85</u>: No additional taxes other than those for gasoline. - <u>Jet Fuel (kerosene-type)</u>: Federal excise tax of \$0.044/gal for commercial aviation. - <u>Aviation gasoline</u>: Federal excise tax of \$0.194/gal. Assumed to always be the same. - <u>Liquid Petroleum Gases (LPG)</u>: Federal excise tax of \$0.183/gal. Assumed to always be the same. - <u>Compressed Natural Gas (CNG)</u>: Federal excise tax of \$0.044/gal. Assumed to be the same as jet fuel. Assumed to always be the same. - <u>Liquefied Natural Gas (LNG)</u>: Federal excise tax of \$0.243/gal. Assumed to always be the same. - <u>Liquefied H₂</u>: Federal excise tax of \$0.184/gal. Assumed to be the same as conventional gasoline. Assumed to always be the same. - <u>FT liquid fuels from coal</u>: Federal excise tax of \$0.244/gal. Assumed to be the same as conventional diesel. Assumed to always be the same. - <u>FT liquid fuels from biomass</u>: Federal excise tax of \$0.244/gal. Assumed to be the same as conventional diesel. Assumed to always be the same.
CA Pavley I and Corporate Average Fuel Economy (CAFE) Standards	<ul style="list-style-type: none"> - <u>Light-duty passenger cars</u>: New model-year vehicle fleet must achieve 263 gCO₂/mile (33.8 mpg) in 2012, strengthening to 225 gCO₂/mile (39.5 mpg) in 2016, assumed to remain constant thereafter. - <u>Light-duty passenger trucks</u>: New model-year vehicle fleet must achieve 346 gCO₂/mile (25.7 mpg) in 2012, strengthening to 298 gCO₂/mile (29.8 mpg) in 2016, assumed to remain constant thereafter.
LEV III Light-Duty Vehicle GHG Emission Standards and CAFE for 2017-2025	<ul style="list-style-type: none"> - GHG emissions rate of new model-year light-duty cars and trucks declines 4.5% per annum (on a gCO₂-eq per mile basis) between 2017 and 2025. Based on notices of intent and an interim technical assessment by DOT-NHTSA, EPA-OTAQ, and CARB, which analyzes the feasibility of an annual rate of improvement of 3 to 6% (EPA-DOT-CARB 2010). - <u>Light-duty passenger cars</u>: New model-year vehicle fleet must achieve 215 gCO₂/mile (41.4 mpg) in 2017, strengthening to 149 gCO₂/mile (59.8 mpg) in 2025, assumed to remain constant thereafter. - <u>Light-duty passenger trucks</u>: New model-year vehicle fleet must achieve 285 gCO₂/mile (31.2 mpg) in 2017, strengthening to 197 gCO₂/mile (45.1 mpg) in 2025, assumed to remain constant thereafter.
Electric Vehicle Subsidies	<ul style="list-style-type: none"> - <u>Light-duty plug-in hybrid electric vehicles (PHEVs) and BEVs</u>: Tax credit for new plug-in electric vehicles is worth \$2,500 plus \$417 for each kWh of battery capacity over 5 kWh. The portion of the credit determined by battery capacity cannot exceed \$5,000; therefore, the total amount of the credit allowed for a new plug-in electric vehicle is \$7,500. Based on the Energy Improvement and Extension Act of 2008, and later the American Clean Energy and Security Act of 2009. Credit is supposed to expire for each manufacturer soon after it has sold 200,000 cumulative PHEV/BEVs for use in the U.S, but in the model it is assumed to expire in 2018. - Additionally, California’s Clean Vehicle Rebate Program (CVRP) is assumed to provide \$2500 per BEV and \$1500 per PHEV until 2023.

¹⁸ For current federal fuel tax information, see the following U.S. Internal Revenue Service (IRS) webpage: <http://www.irs.gov/publications/p510/ch01.html#d0e2009>. For current state gasoline and diesel tax information, see the following API webpage: <http://www.api.org/statistics/fueltaxes/>.

California TIMES (CA-TIMES) Modeling of California Energy and Climate Policies (Draft Final Report for Review and Comments)

GHG Emission Performance Standard for New Power Plants	- Establishes a greenhouse gases emission performance standard for all baseload generation of local publicly owned electric utilities at a rate of emissions of greenhouse gases that is no higher than the rate of emissions of greenhouse gases for combined-cycle natural gas baseload generation [California Senate Bill (SB) 1368]. This essentially equates to “no new coal plants in California”. In CA-TIMES, the law is applied to coal steam, coal IGCC, and coal-to-H ₂ plants.
Low Carbon Fuel Standard (LCFS) biofuels scenario	- This is a scenario based upon one particular mix of fuel production that could meet the LCFS out to 2020. It is one means of satisfying the LCFS policy but other fuel mixes could as well. In California, the LCFS is a more stringent requirement than the RFS2, and the different incentives will likely result in a different fuel mix and CI values compared to the volume mandates in the federal RFS2 requirement (Yeh and Sperling 2013). We combined the latest ICF scenarios projecting the necessary biofuel volumes to meet California’s LCFS by 2020 across three possible scenarios, and use our expert judgment to derive at minimum energy requirement of different types of biofuels (See Figure D.1). We keep the volume constant 2020-2022 to reflect the minimum constraint of the RFS2 requirement till 2022. Work is ongoing to incorporate a more flexible policy representation of the LCFS.
Renewable Portfolio Standard (RPS)	- By 2020 and each year subsequent, 33% of California electricity generation must come from renewable sources (excluding hydro). Assumed to remain constant thereafter. Based on Executive Order S-14-08 and Executive Order S-21-09.
Renewable Incentives Electricity	- <u>Renewable electricity production tax credit (PTC)</u> : Credit of 2.2 cents/kWh for Wind, Geothermal, and Closed-loop biomass; and 1.1 cents/kWh for all other renewables (Open-loop biomass, Landfill gas, Hydroelectric, Municipal Solid Waste, Hydrokinetic “Flowing Water” Power, Small Hydroelectric, Tidal Energy, Wave Energy, and Ocean Thermal). Duration of credit is 10 years for facilities placed in service by the end of 2012 (wind) or 2013 (all others). Thus, all credits assumed to expire by 2022/2023. Note that Solar is excluded from the production tax credit because it receives the investment tax credit. - <u>Business energy investment tax credit (ITC) for renewables</u> : Credit equal to 30% of capital expenditures for Solar and Fuel cells. No maximum credit for solar; a maximum of \$3,000/kW for fuel cells. In general, credits are available for eligible systems placed in service before the end of 2016. In CA-TIMES, credits are assumed to expire in 2016. Note that as of 2009, other types of renewable generation are allowed to take the ITC; however, they would then have to forfeit the PTC. In CA-TIMES, it is assumed that only solar and fuel cells can take the ITC.
Zero Emissions Vehicle (ZEV) Mandate vehicle scenario	- See description below
80% GHG Reduction Goal by 2050	- Reduce GHG emissions to 1990 levels by 2020, and 80% below 1990 levels by 2050. Based on a California Executive Order S-3-05. Only applies to fuel combustion emissions in CA-TIMES. Interim emission targets between 2020 and 2050 are linearly interpolated.
Energy Efficiency Standards for ICRA Sector Technologies	- Average annual efficiency improvement of generic end-use sector technologies in the Industrial, Commercial, Residential, and Agricultural sectors. Efficiency gains are over and above those assumed in the Reference Case, and are technically feasible with today’s technologies. Industrial (0.41% per year); Commercial (0.50% per year); Residential (0.68% per year); Agricultural (0% per year). Based on the <i>Baseline – high efficiency</i> scenario of McCarthy et al. (McCarthy, Yang et al. 2008) compared to the <i>Baseline demand</i> scenario.

Zero Emissions Vehicle (ZEV) Mandate vehicle Policy constraint

The ZEV constraint is a linear constraint where a certain percentage of the total car and light truck mix must qualify as ZEVs or TZEVs. Each type of vehicle is given a weighting factor (depending on the year), which enhances or reduces its ability to contribute to the ZEV percentage.

The overall constraint can be written as:

$$\sum a_{i,t} X_{i,t} \geq ZEV\%_t$$

where $a_{i,t}$ is the weighting factor for a given vehicle type i in year t
 and $X_{i,t}$ is the percentage of all cars and trucks sold that is of type i in year t
 and $ZEV\%$ is the target ZEV percentage in year t

There are 7 types of cars/trucks that can contribute to meeting the ZEV requirement:

1. BEV100 (Battery Electric Vehicle with 100 mile range),

2. BEV200 (200 mile range),
3. FCV (Hydrogen Fuel Cell Vehicle),
4. PHEV10 (Plug-in Hybrid Vehicles with 10 mile all electric range),
5. PHEV30 (Plug-in Hybrid Vehicles with 30 mile all electric range),
6. PHEV40 (Plug-in Hybrid Vehicles with 40 mile all electric range), and
7. PHEV60 (Plug-in Hybrid Vehicles with 60 mile all electric range)

In CA-TIMES, we have multiple technologies that for each PHEV type since the PHEV’s alternative power source could run on gasoline, diesel or biofuel, and each vehicle also comes in a car or light-truck version.

In the equation above, the coefficients will differ by year and for each vehicle type.

	BEV100	BEV200	FCV	PHEV10	PHEV30	PHEV40	PHEV60
2012-2017	3	4	9	1.1	2*	2.5	2.75*
2018-2025	1.5	2.5	4	0.4	0.6	0.7	0.9

* these values are estimated from other values

The ZEV percentage target changes each year.

year	ZEV Credit %
2012	3%
2013	3%
2014	3%
2015	6%
2016	6%
2017	6%
2018	5%
2019	7%
2020	10%
2021	12%
2022	15%
2023	17%
2024	20%
2025	22%

The equation is rewritten to get rid of sales percentages and use actual numbers of cars and light trucks sold instead. Since $X_{i,t}$ and $ZEV\%_t$ are percentages of total cars sold, can multiple by the total number of cars and light trucks sold in year t to get the numbers of cars sold of type i ($Y_{i,t}$).

$$X_{i,t} = Y_{i,t} / \text{Total LDVs sold}_t$$

$$\sum a_{i,t} X_{i,t} (\text{TotalLDVSold}_t) \geq ZEV\%_t (\text{TotalLDVSold}_t)$$

$$\sum a_{i,t} Y_{i,t} \geq ZEV\%_t (\text{TotalLDVSold}_t)$$

$$\sum a_{i,t} Y_{i,t} - ZEV\%_t (\text{TotalLDVSold}_t) \geq 0$$

where $a_{i,t}$ is the weighting factor for a given vehicle type i in year t
 $Y_{i,t}$ is the number of cars sold of type i in year t
 and $ZEV\%_t$ is the target ZEV percentage in year t

This formulation gives the CA-TIMES model full flexibility as to how to meet the ZEV mandate. However, there is an additional constraint where full ZEVs (i.e. BEV100, BEV200 and FCVs) must comprise a given fraction of total ZEV mandate compliance. This is set up in the exact same way:

$$\sum a_{i,t} Z_{i,t} \geq \text{MinZEV}\%_t$$

except now the set of $Z_{i,t}$ only comprises BEVs and FCVs and the $\text{MinZEV}\%_t$ target is another set of targets for each year.

References

California Air Resources Board. 2012 Proposed Amendments To The California Zero Emission Vehicle Program Regulations.

Low Carbon Fuel Standard Policy constraint

The LCFS sets a performance standard on the average fuel carbon intensity of on-road transportation fuel mix in California before 2020. LCFS can be met with a wide range of low-carbon transportation fuels, such as electricity, natural gas, biogas, and hydrogen; though the main source of compliance is biofuels. The California LCFS is more stringent than the RFS2, and the different incentives will likely result in a different fuel mix and CI values compared to the volume mandates in the federal RFS2 requirement (Yeh and Sperling 2013). We combined the latest ICF scenarios projecting the necessary biofuel volumes to meet California’s LCFS by 2020 across three possible scenarios, and use our expert judgment to derive at minimum energy requirement of different types of biofuels (See Figure D.1). Work is ongoing to incorporate a more flexible policy representation of the LCFS.

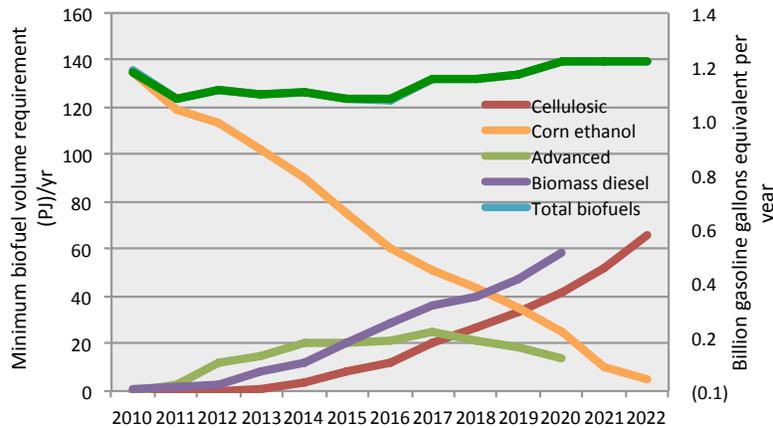


Figure D.1. Minimum energy requirements for biofuels to meet the California’s LCFS (and the RFS2) before 2022.

APPENDIX E. MORE DETAILED SCENARIO RESULTS

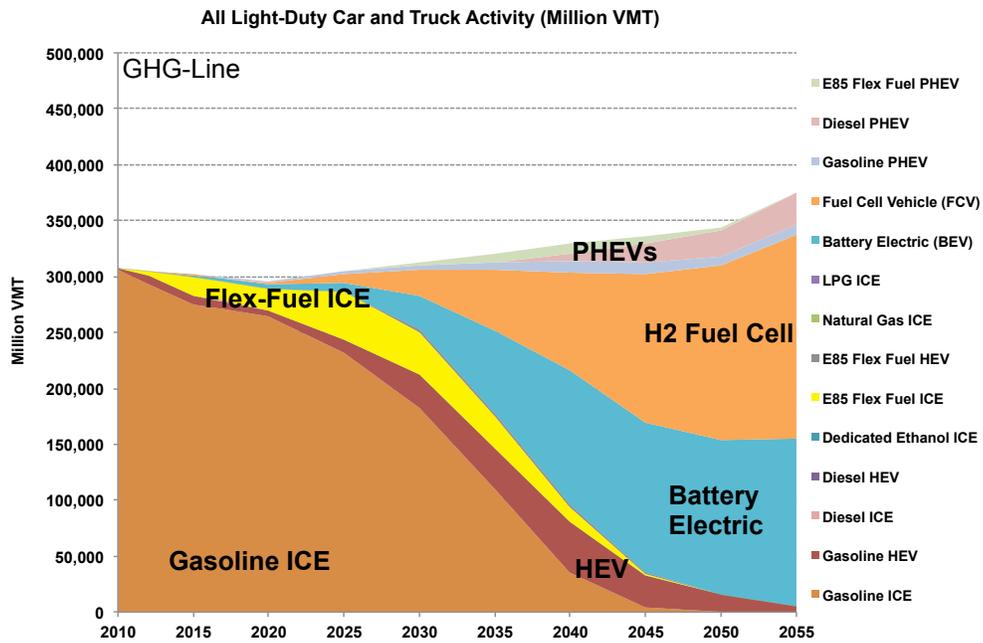


Figure E.1. Light-duty vehicle VMT by vehicle type in the 80% GHG Linear Reduction Scenario (GHG-Line).

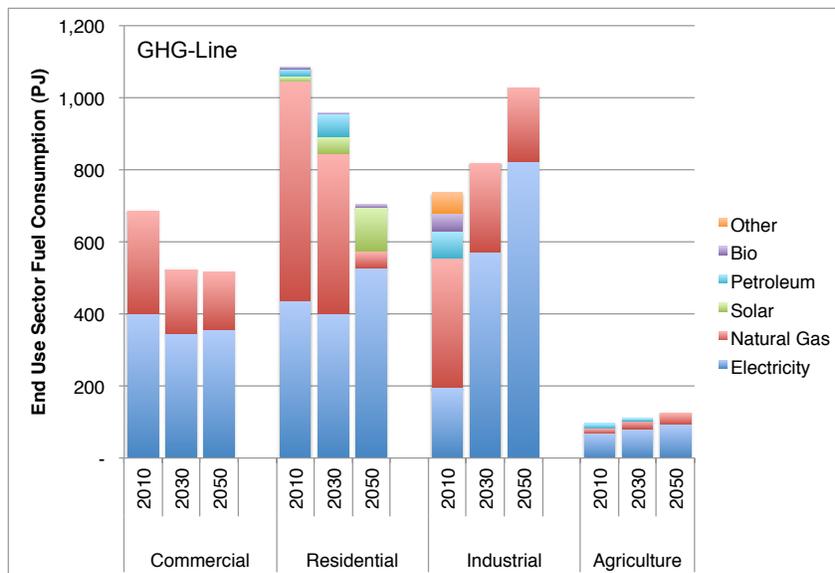


Figure E.2. Final energy (fuel) demands for commercial, residential, industrial and agricultural sectors in the GHG-Line scenario.

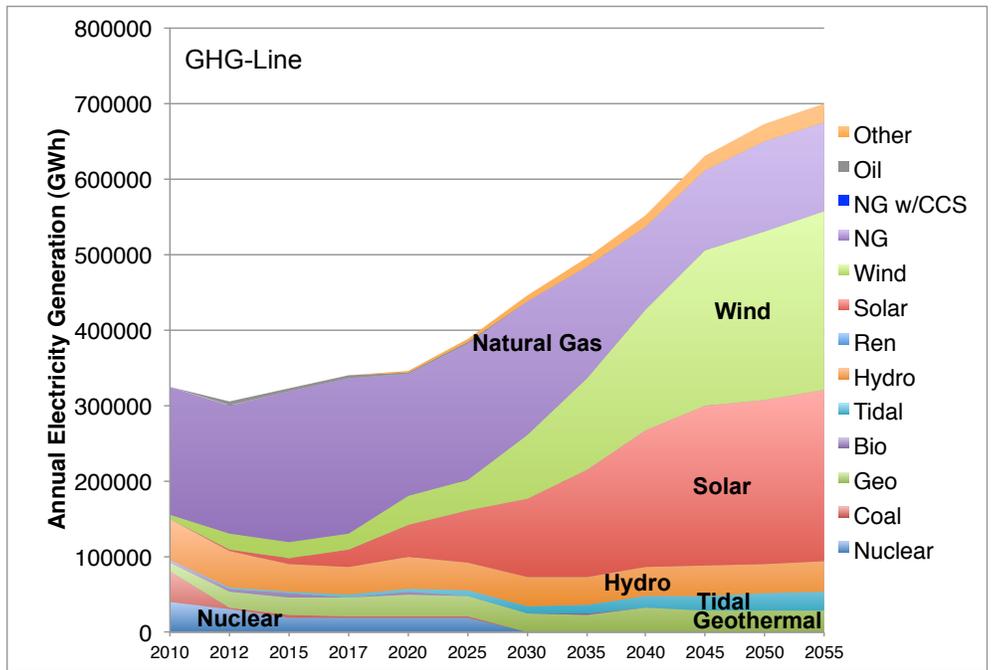


Figure E.3. Electricity generation by resource type in the 80% GHG Linear Reduction Scenario (GHG-Line).

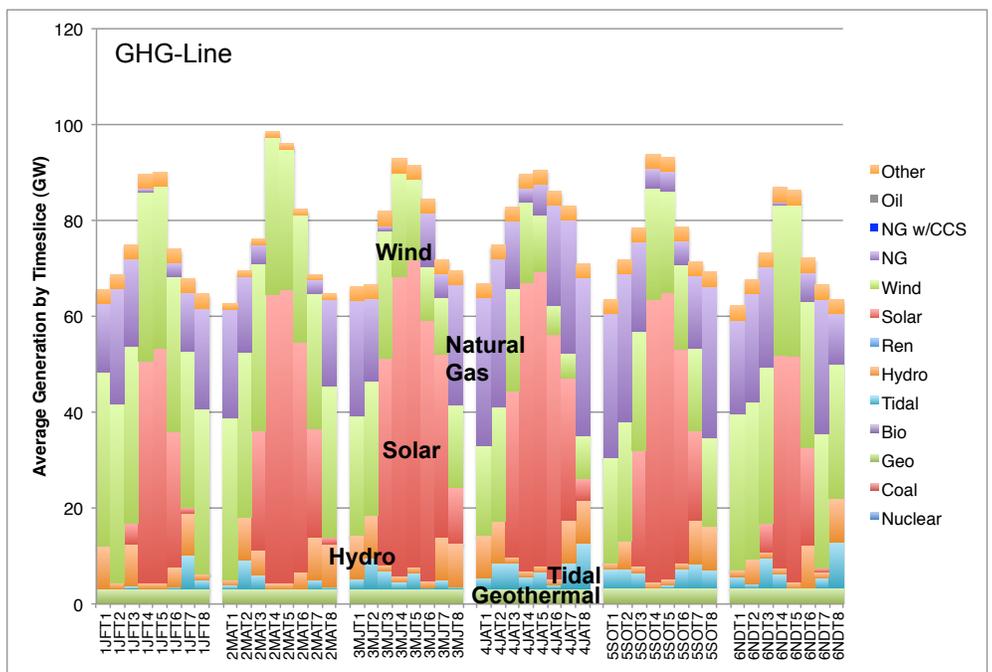


Figure E.4. Electricity generation by resource type and timeslice in the 80% GHG Linear Reduction Scenario (GHG-Line).

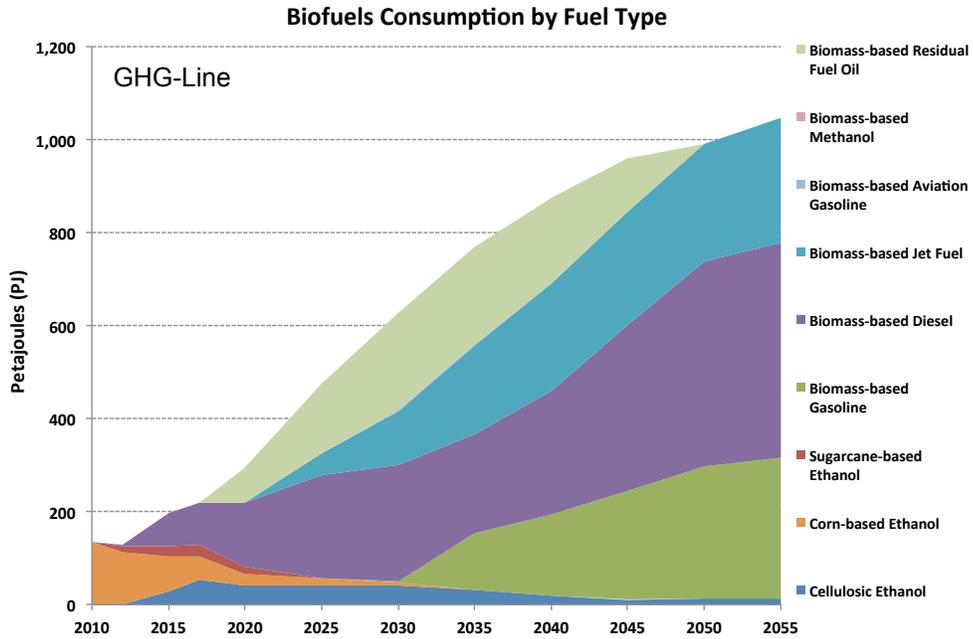


Figure E.44. Annual biofuel production by category for the 80% GHG-Step Reduction Scenario (GHG-Line).

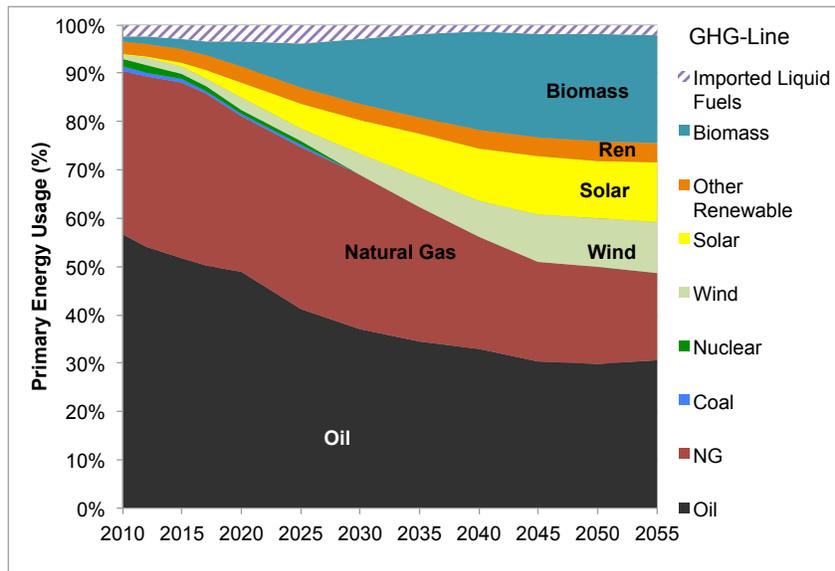


Figure E.6. Annual share of primary energy resources for the 80% linear GHG emissions reduction (GHG-Line) scenario.

Table E.1. Annualized Total Costs by Category (Million 2010\$, undiscounted), BAU scenario

Year	Energy Supply			End Use Sectors				Total
	Electricity	Fuels & Energy Supply	Total	Transportation	Residential	Commercial	Total	
2010	2,525	1,853	4,378	14,559	13,921	6,607	35,087	39,465
2015	3,567	1,913	5,480	63,410	21,614	7,059	92,084	97,564
2020	6,319	3,793	10,113	113,476	25,724	8,807	148,007	158,119
2025	8,283	7,308	15,591	161,548	25,472	10,401	197,421	213,012
2030	9,251	8,355	17,606	195,385	24,180	10,973	230,538	248,143
2035	9,894	10,949	20,843	213,249	24,523	11,209	248,981	269,824
2040	9,134	12,688	21,822	231,555	26,612	12,059	270,226	292,048
2045	9,560	14,381	23,941	240,896	27,990	12,819	281,705	305,646
2050	8,782	15,123	23,905	252,066	29,764	13,504	295,334	319,239
Total (undiscounted)	314,680	346,891	661,572	6,887,358	1,017,301	427,173	8,331,831	8,993,403

Table E.2. Annualized Total Costs by Category (Million 2010\$, undiscounted), GHG-Step scenario

Year	Energy Supply			End Use Sectors				Total
	Electricity	Fuels & Energy Supply	Total	Transportation	Residential	Commercial	Total	
2010	2,842	1,851	4,693	14,559	14,359	6,211	35,129	39,822
2015	3,784	1,955	5,739	57,616	21,926	7,012	86,554	92,293
2020	8,315	4,503	12,818	119,119	26,364	9,396	154,879	167,697
2025	12,185	7,836	20,021	154,520	26,351	11,776	192,647	212,669
2030	15,686	9,710	25,396	179,964	25,610	13,953	219,527	244,923
2035	21,792	12,010	33,802	196,186	26,351	16,029	238,566	272,368
2040	26,095	13,548	39,643	214,364	30,586	18,977	263,926	303,570
2045	32,586	15,002	47,587	224,286	39,334	23,015	286,635	334,223
2050	37,850	21,759	59,609	231,452	58,344	28,697	318,493	378,102
Total (undiscounted)	720,596	392,196	1,112,792	6,460,762	1,205,201	606,062	8,272,025	9,384,811

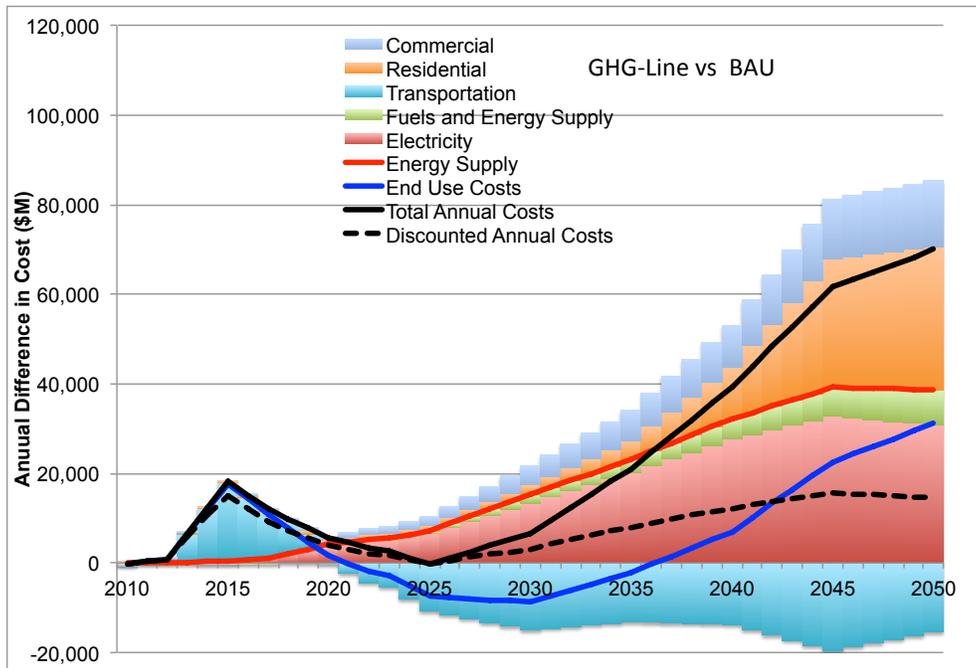


Figure E.745. Annual cost difference between GHG-Line and BAU scenarios broken down by sector.

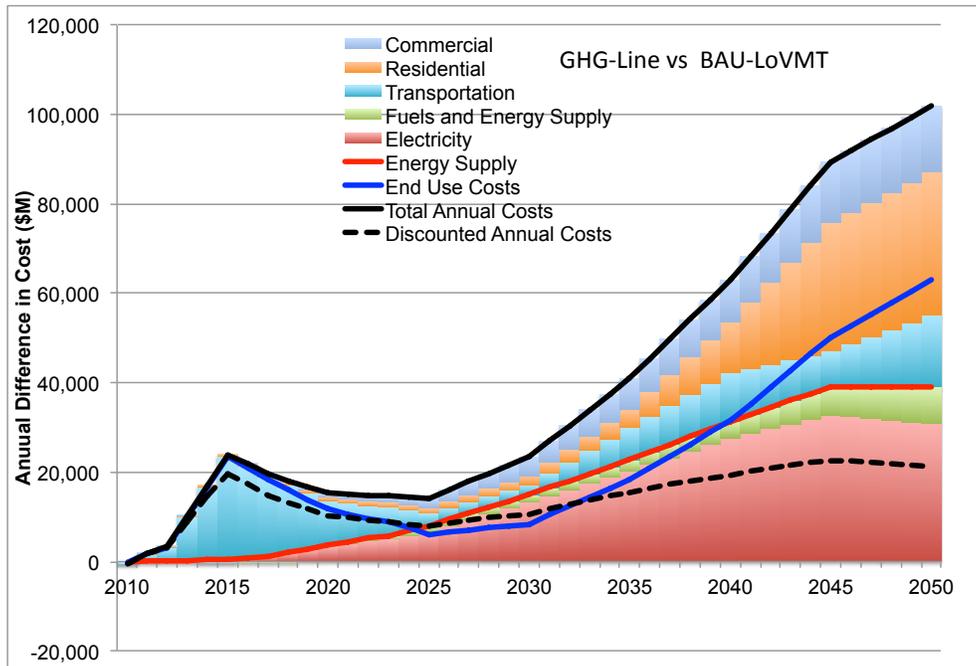


Figure E.8. Annual cost difference between GHG-Line and BAU-LoVMT scenarios broken down by sector.